

Flood & Work Light




LED Flood Light (High Output)



Features :

- ✘ Durable & Rubber H05RN-F3G Cable, Optional Plugs for Different Countries
- ✘ High Transmission Tempered Glass, in Aerospace
- ✘ Aluminum Body of Good Heat Dissipation
- ✘ IP65 Protection Level

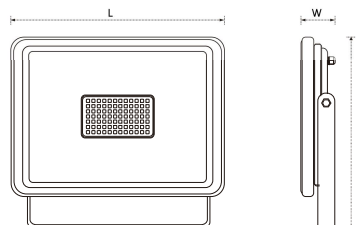

01

CB CE ErP

FC



No Flicker



Ra80



25000h



S: AC 220-240V
U: 110-240V



For Outdoor



110°



0.9

Model No. 产品规格	Dimension LxHxW(mm)	Rated Power 额定功率	Cable 电源线	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFL-XRHO-E150	320*230*30	150W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	5	36.0*22.0*26.5
XGYFL-XRHO-E200	380*365*30	200W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	5	42.0*22.0*29.0
XGYFL-XRHO-E250	380*340*45	250W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	5	41.0*31.5*36.5
XGYFL-XRHO-E300	480*310*60	300W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	2	50.5*41.5*22.5
XGYFL-XRHO-E400	500*375*60	400W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	2	56.5*44.5*22.5
XGYFL-XRHO-E500	605*480*77	500W	0.15m H05RN-F3G 1.50mm ² rubber cable	90-120 lm/W	3000K-6500K	1	61.0*8.7*50.0

Flood & Work Light



LED Flood Light (General Lighting)



IP65
PROTECTION
LEVEL

Features :

- ☒ Durable & Rubber Cable, Optional Plugs for Different Countries
- ☒ Aluminum & Tempered Glass
- ☒ Aluminum Body of Good Heat Dissipation
- ☒ IP65 Protection Level



02

CB CE ErP

FC



No Flicker



Ra70/80



25000h



S: AC 220-240V
U: AC 110-240V



For Outdoor



110°



0.9

Model No. 产品规格	Dimension W*H*T(mm)	Rated Power 额定功率	Cable 电源线	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFL-YGUS-E10	86*67*25	10W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	60	32*28*23
XGYFL-YGUS-E20	96*80*25	20W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	60	32*31*25
XGYFL-YGUS-E30	128*98*25	30W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	40	32*31*25
XGYFL-YGUS-E50	164*128*25	50W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	40	38*32*30
XGYFL-YGUS-E70	195*152*25	70W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	40	34*34*22
XGYFL-YGUS-E100	270*185*27	100W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	10	34*30*21
XGYFL-YGUS-E150	330*220*27	150W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	10	36.5*34*24.5
XGYFL-YGUS-E200	370*260*28	200W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	10	40.5*35*28
XGYFL-YGUS-E300	450*330*30	300W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	10	47.5*35*30



Collapsible Series

Model No. 产品规格	XGYFL-PORTCL-E10	XGYFL-PORTCL-E20	XGYFL-PORTCL-E30	XGYFL-PORTCL-E50	XGYFL-PORTCL-E100
-------------------	------------------	------------------	------------------	------------------	-------------------

Relative Power 对应功率	10W	20W	30W	50W	100W
------------------------	-----	-----	-----	-----	------

Dimension W*H*L(mm)	160*200*140	170*210*150	205*230*160	240*260*175	340*310*185
------------------------	-------------	-------------	-------------	-------------	-------------



I Shape Series

Model No. 产品规格	XGYFL-PORTIS-E10	XGYFL-PORTIS-E20	XGYFL-PORTIS-E30	XGYFL-PORTIS-E50	XGYFL-PORTIS-E100
-------------------	------------------	------------------	------------------	------------------	-------------------

Relative Power 对应功率	10W	20W	30W	50W	100W
------------------------	-----	-----	-----	-----	------

Dimension W*H*L(mm)	137*205*100	147*215*115	175*235*145	215*275*165	325*330*185
------------------------	-------------	-------------	-------------	-------------	-------------



S Shape Series

Model No. 产品规格	XGYFL-PORTSS-E10	XGYFL-PORTSS-E20	XGYFL-PORTSS-E30	XGYFL-PORTSS-E50	XGYFL-PORTSS-E100
-------------------	------------------	------------------	------------------	------------------	-------------------

Relative Power 对应功率	10W	20W	30W	50W	100W
------------------------	-----	-----	-----	-----	------

Dimension W*H*L(mm)	165*230*155	175*245*165	230*295*195	270*320*205	340*360*215
------------------------	-------------	-------------	-------------	-------------	-------------



Tripod Series

Model No. 产品规格	XGYFL-PORTSS-E10	XGYFL-PORTSS-E20	XGYFL-PORTSS-E30	XGYFL-PORTSS-E50	XGYFL-PORTSS-E100
-------------------	------------------	------------------	------------------	------------------	-------------------

Relative Power 对应功率	10W	20W	30W	50W	100W
------------------------	-----	-----	-----	-----	------

Dimension (Includes lights) W*H*L(mm)	77*223*77	77*236*77	77*254*77	77*284*77	77*341*77
---	-----------	-----------	-----------	-----------	-----------

Flood & Work Light



LED 360° Cylindrical Working Light (Portable Version)



Portable Model




Power Input



Interconnection Base



Collapse Mode

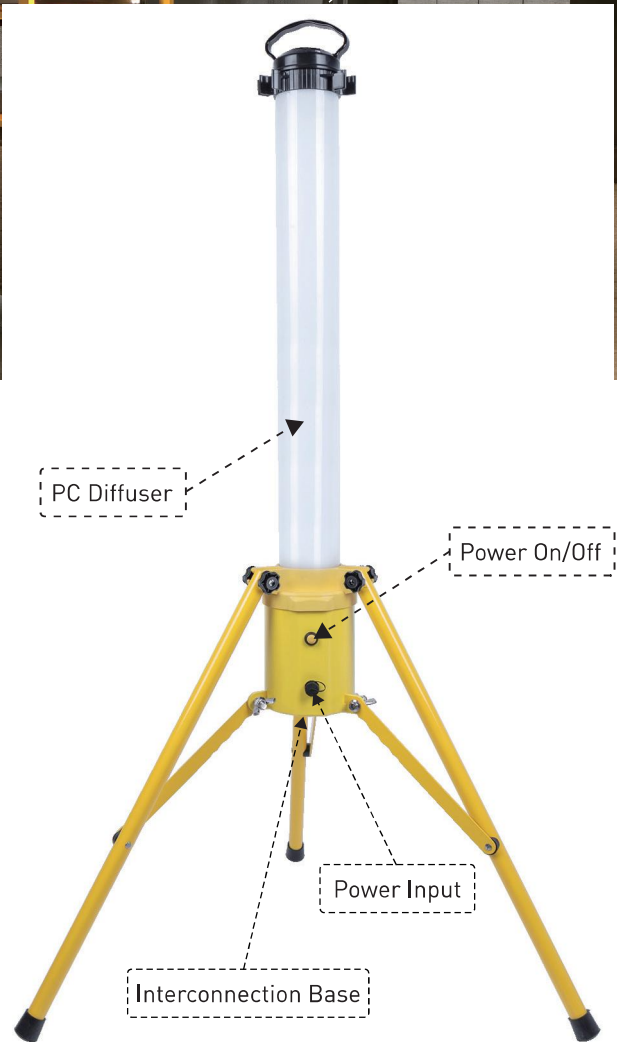

CB CE ErP



No Flicker



Ra70/80



25000h



U:85-265V
S:185-265V



For Outdoor



360°



0.9

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Cable Length 插头线长度	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCWL-P-E65	Φ165*900 Φ800*1260	65W	3m/5m/10m	85 lm/W	3000K-6500K	1	20*20*91
XGYCWL-PR-E40 (Rechargeable)	Φ165*900 Φ800*1260	40W	3m/5m/10m	85 lm/W	3000K-6500K	1	20*20*91