

☎ 86-183-5831-5743

Raymond Koo International Sales Director

Skype: raymondkoo103@yahoo.com.hk

What's App: 852-69090122 **QQ:** 30-0430-0682

E-mail: r.koo@new-lights.com

☎ 86-159-9035-7080

Ruby Zhu General Manager

Skype: rubychuch **QQ:** 30-0430-0176

What's App: 86-159-9035-7080

E-mail: sun@new-lights.com | manager@new-lights.com

Factory: Haining Xin Guang Yuan Lighting Technology Co., Ltd.

Trading Company: Haining New Light Source Trading Co., Ltd.

No.5 Fenghuang Road Qianjiang Industrial Area Dingqiao Town

Haining Zhejiang 314413 China

<https://www.newlights.com>

<https://www.new-lights.com>

<https://www.new-lights.net>

Sales Agent: New Lights (HK) Company


Flak K Fr.2 Blk 7 Aldrich Grd., Shau Kei Wan HK

A black and white photograph showing a series of long, rectangular LED light fixtures installed in a curved ceiling, creating a modern, industrial look.

The Lighting Catalogue

LED Luminaries

Your Trusted Lighting Partner
since 1998

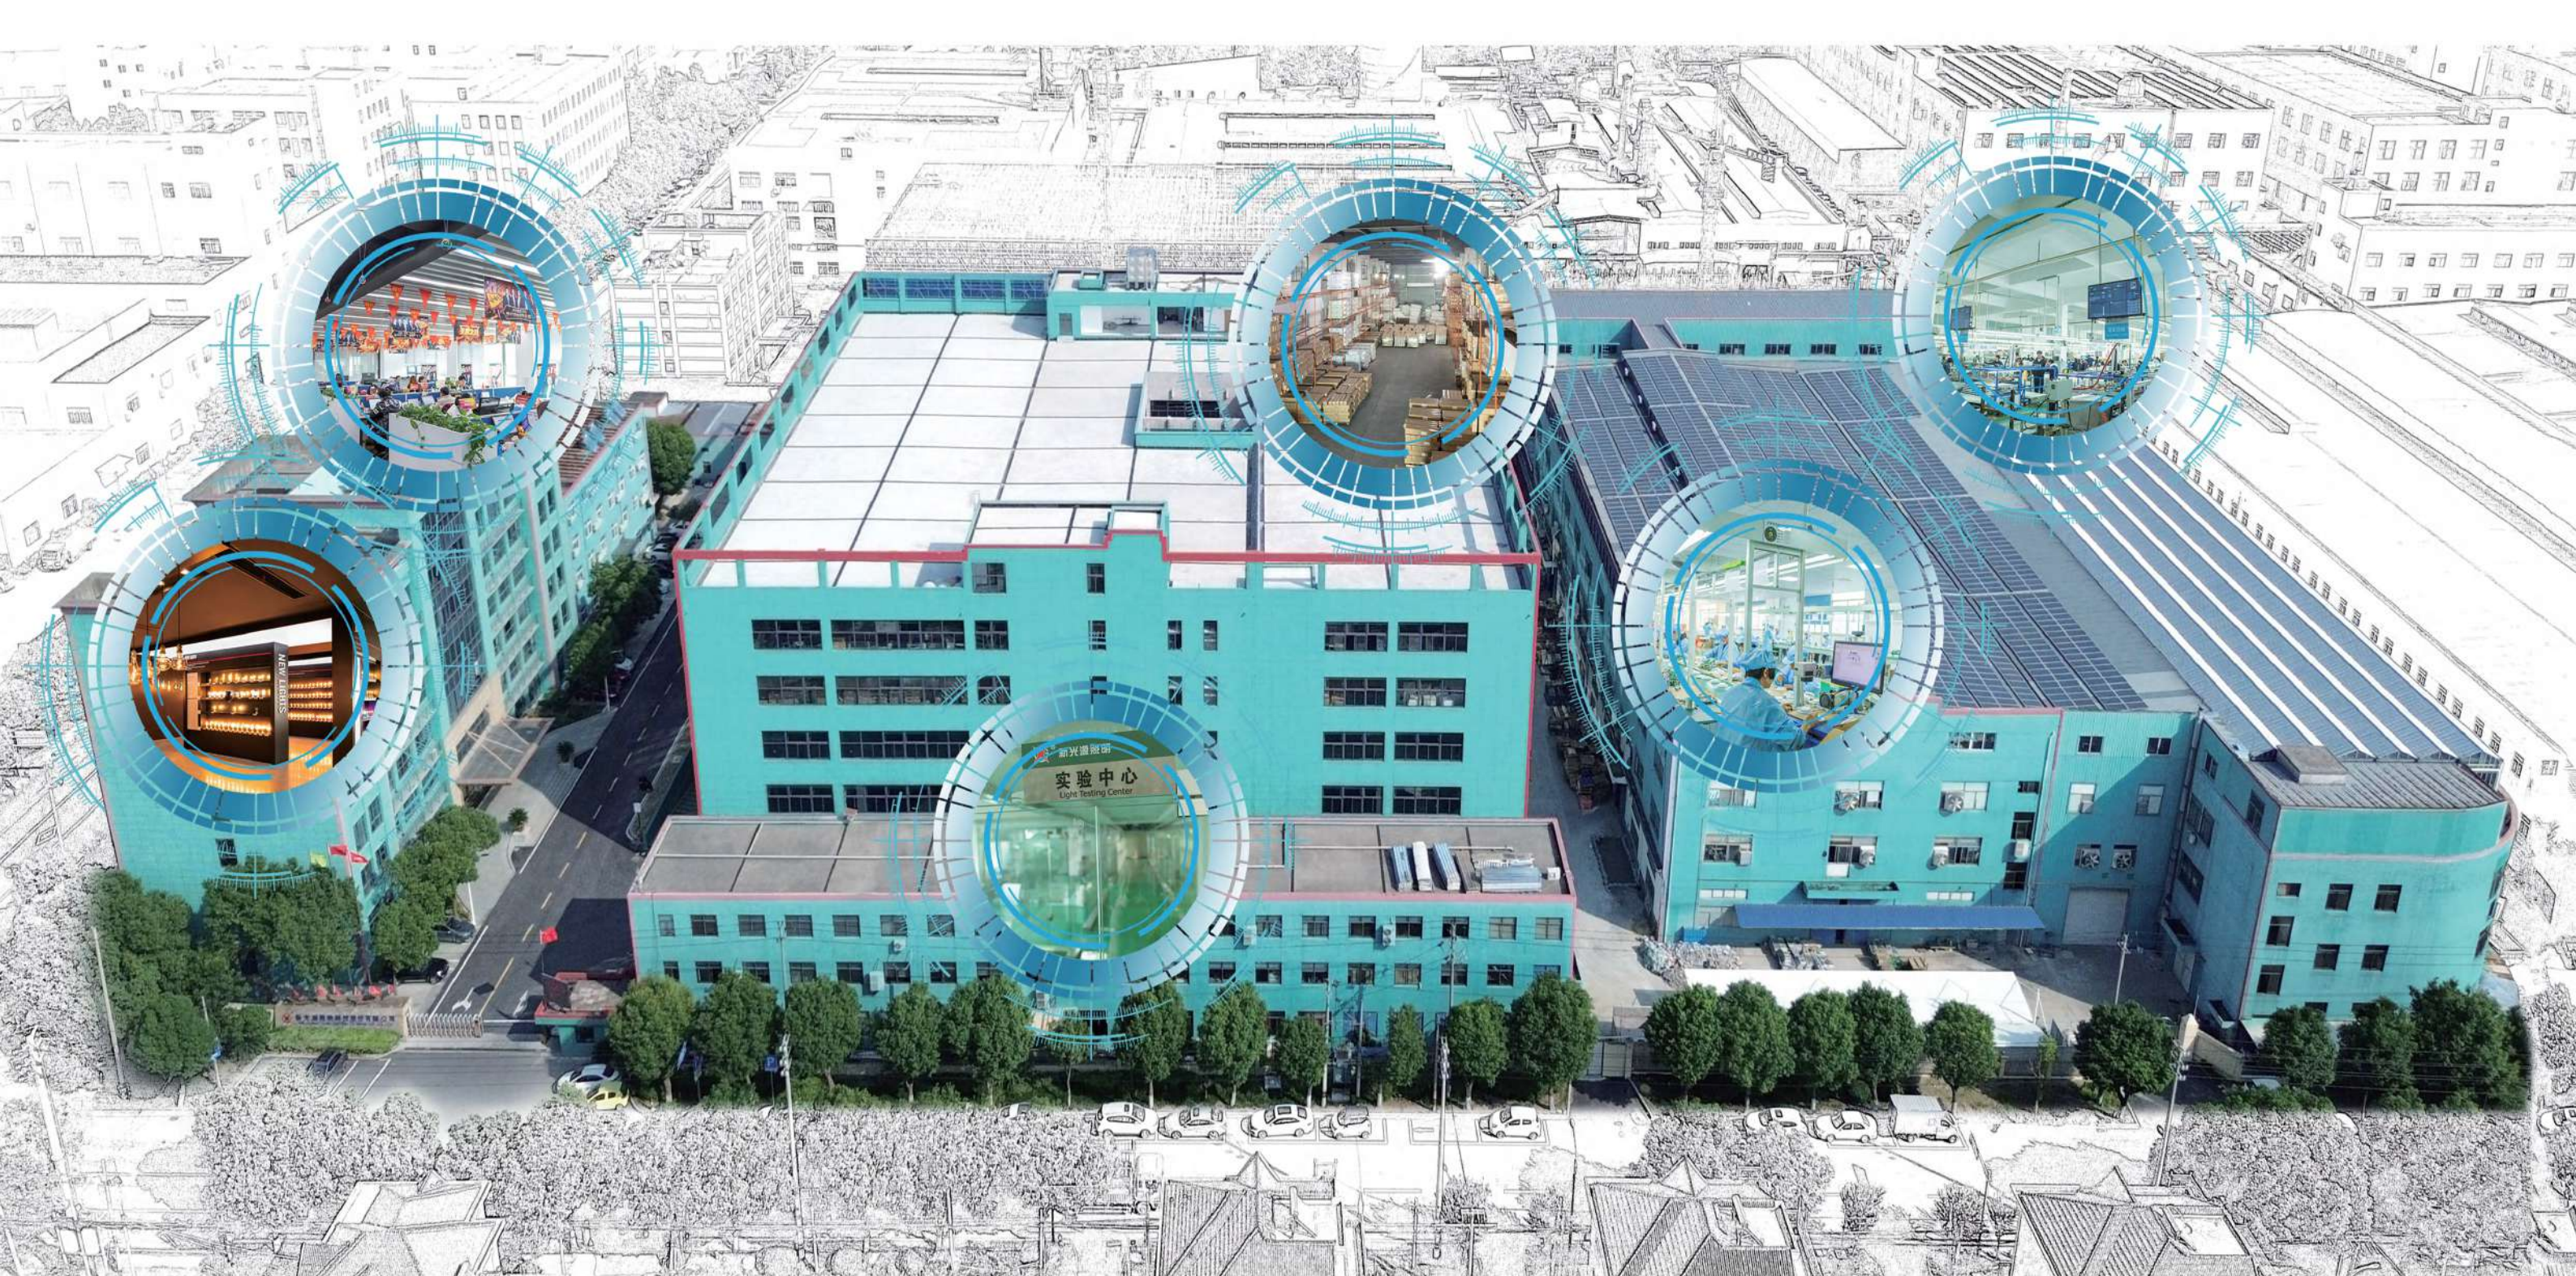

28 Years
Manufacturing
Experience



500+
Company
Employees



58,124m²
Area
Covered



5,584,000
Monthly
Capacity



82
Exporting
Countries




21
Production
Lines

Our Certification



Team & Factory

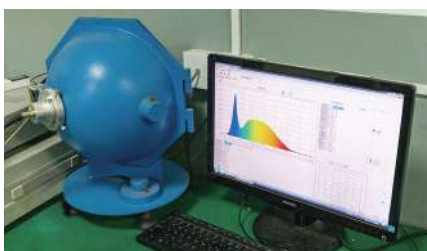



CONTENT PAGE

Sun Simulator Light 01-05

Applications	01
P & X Series	03
D & L Series	04
T Series	05

LED Linear Fixtures 01-13

T5 Integrated LED Fixture	01
T8 Integrated LED Fixture	02
Rotatable Linear Fixture	03
Water-Proof LED Fixture (IP65)	04
Tri-Proof Fixture	07
Connectable LED Shop Light	11
LED Purification Lamps	12
Prism Lens LED Linear Batten	13

LED Ceiling Lamp & Fan Light 01-28

LED Ceiling Lamp	
Metal Base	
- Regular Shape	01
- Super Slim	02
- Special Shape	03
- Functional	05
- RGB Ambient & Decorative	06
Full Plastic Downlight	
- HY03C Model	11
- HY05/06 Model	12
- HY08 Model	13
- HY09 Model	14
- HY17 Model	15
Full Plastic Edge Light	
(Ultra-Slim Flush Mount Model)	16
LED Ceiling Lamp Module	17
LED Bulk Head	18

LED Fan Light	
Ceiling Mount	
- with Grid	19
- with Grid & RGB	20
- without Grid	21
- with Collapsible Blades	22
- Bladeless / Hidden	23
- Rectangular Bladeless	24
Edison Screw	
- Fan Shape With Grid / Without Grid	25
- Bulb Shape Mounted Blades	26

LED Panels & Downlight 01-26

LED Large Panel Light	
- LED Backlit - Standard & Ultra Slim	01
- LED Side Emission	02
- LED Frame Panel Light	03
- LED Backlit Panel - UGR<16	04
- LED Backlit Grid Panel - UGR<13	05
- Installation	06
LED Small Panel DOB Backlit (Full Plastic)	09
LED Small Panel External Driver (Full Plastic)	11
LED Small Panel (Aluminum)	12
LED Downlight of Different Beam Angle (Full Plastic)	13
LED Anti-Glare Downlight (Full Plastic)	14
LED Downlight (Die-Cast Aluminum)	15
LED GU10 Module	23
GU10 / GU10 Module Fixtures & Rings	24

LED Spot Light 01-07

Plastic Housing Integrated LED	01
Metal Housing for GU10/MR16	04

LED Table Lamp 01-05

LED Table Lamp	01
----------------	----

LED Under Cabinet Light 01-03

LED Under Cabinet Light	01
-------------------------	----

LED Night Light 01-03

LED Night Light	01
-----------------	----

LED Wall Lamp 01-04

LED Wall Lamp	01
---------------	----

Flood & Work Light 01-04

LED Flood Light	
- High Output	01
- General Lighting	02
LED 360° Cylindrical Working Light (Portable Vesion)	04

LED Solar Lighting 01-11

Solar Flood Light (Separate Solar Panel)	
- Economic	01
- Standard	02
Solar Flood Light (Integrated Solar Panel)	03
Solar Landscape Flood (Integrated Solar Panel)	04
Solar Wall Lamp	05
Solar Garden Light	
- Special Design	08
- Lantern Style	09
Solar Lamp of Multiple Installations	10

Horticultural Lighting 01-09

LED Newlights Harvest Lamp	01
T8 Grow Tube & Linear Fixture	04
IP65 T8 LED Tube	05
LED Filament & PAR Bulb	06
LED Flood Light & UFO	07
LED Table Growing Fixture	08
Spectrum Available	09

LED Smart & Ambient 01-04

LED Smart Television LED Strip	01
Amazing Cubes Table Lamp	02
LED Smart Ambient Floor Lamp	03
LED Smart Hexagon DIY Lamp	04

Sun Simulator Light




Under the sky, human beings and nature coexist for millions of years. Sunshine, air and water are called the three elements of life, which play a vital role in people's physical and mental health. Sky lighting, the sun simulator, can be simulated indoor sunlight, anytime and anywhere for people to bring sunlight.



01




Smart Control

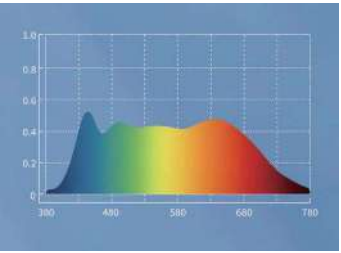

Sun Simulator Light



Applications

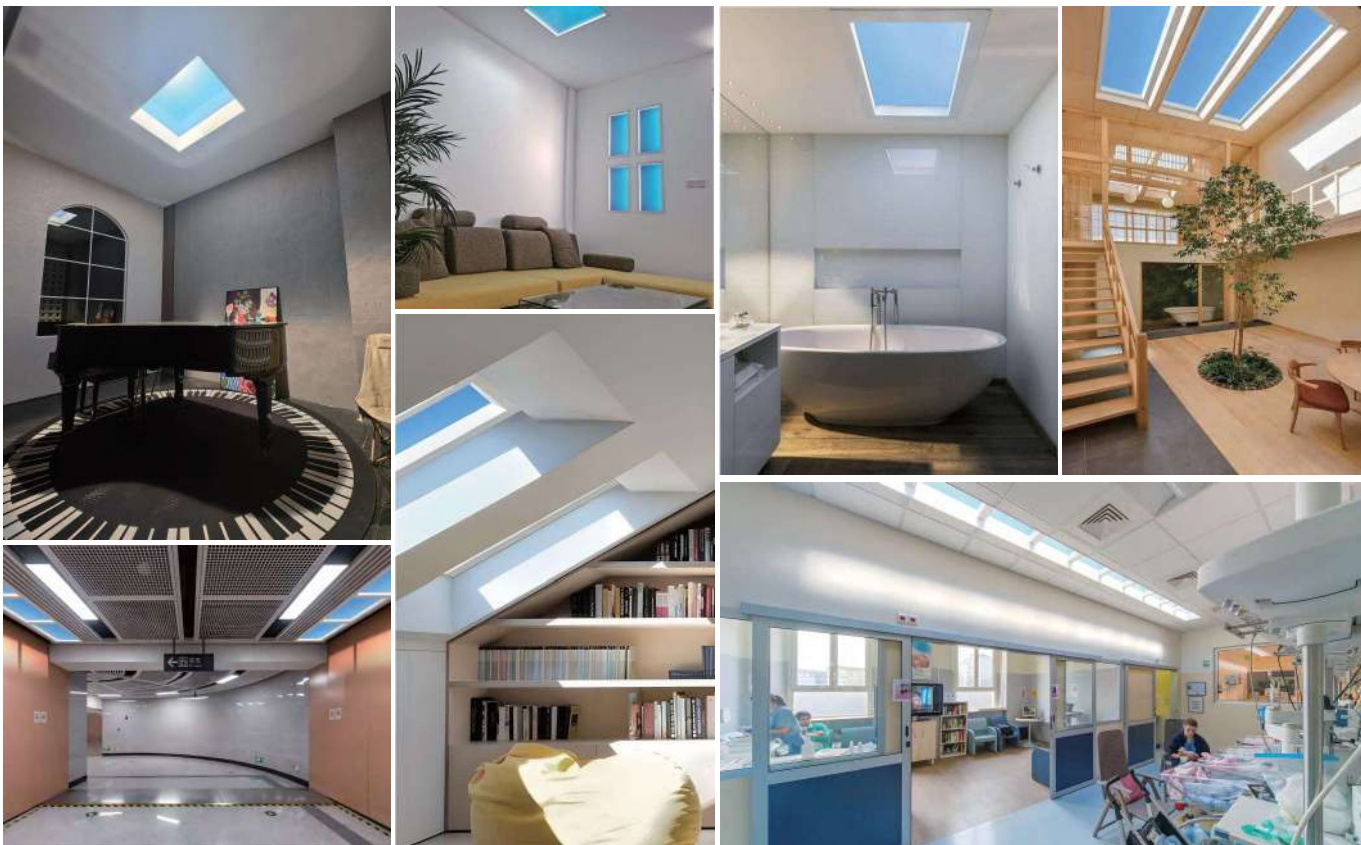

02


Serial Number	D Series	E Series	T Series	L Series	P Series	X Series
Product Picture						
Angle of emergence Schematic drawing						
Blue sky	●	●	●	●	●	●
White cloud	○	●	○	○	○	○
Sun	○	○	●	○	○	○
Facula line	○	○	●	○	○	○
Design Recommendation	Oblique Illumination Angle is 30°	Straight Illumination Sun Follow up	Oblique Illumination seen that the lightspots on the sun Sun follow up Spot Line Visible	Linear Lighting Angle is 30°	Sky Light	Window Light

Sun Simulator Light

P&X series



Ultra thin P Series



- ✗ C Shaped Reflection
- ✗ Customizable Frame Outlook

Window X Series



- ✗ L Shaped Reflection
- ✗ Customizable Frame Outlook

Recommended Control:

• Remote Control



• Smart Control



No Flicker



Ra93



30000h



100-240V



For Indoor



0.5

Model No. 产品规格	Dimension WxHxD(mm)	Rated Power 额定功率	Hole Size 开孔尺寸(mm)	Light Surface 发光面尺寸(mm)	Lumen 光通量	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSSL-YRP3060-E45	582*282*36	45W	Used in conjunction with X1 keel	527*227	2500lm	2100-5700K	1	60.2*30.2*5.6
XGYSSL-YRX13078-E160	1332*781*60	160W	1332*771	4*[527*227]	10000lm	2100-5700K	1	135.2*80.1*8

Sun Simulator Light

D&L series



No Flicker



Ra93



30000h



100-240V




For Indoor



0.5


Model No. 产品规格	Dimension WxHxD(mm)	Rated Power 额定功率	Hole Size 开孔尺寸(mm)	Light Surface 发光面尺寸(mm)	Lumen 光通量	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSSL-YRD3030-E25	300*300*150	25W	285*285	244*244	1000lm	2100-7800K	1	32*32*17
XGYSSL-YRD3060-E50	300*600*150	50W	285*585	244*544	2000lm	2100-7800K	1	62*32*17
XGYSSL-YRD30120-E100	300*1200*150	100W	285*1185	244*1144	4000lm	2100-7800K	1	122*32*17
XGYSSL-YRD6060-E75	600*600*295	75W	585*585	500*500	3000lm	2100-7800K	1	62*62*17
XGYSSL-YRD60120-E150	600*1200*295	150W	585*1185	500*1100	6000lm	2100-7800K	1	122*62*17
XGYSSL-YRL14115-E50	140*1150*86	50W	125*1135	86*1096	2000lm	2100-7800K	1	142*1170*90

Installations :

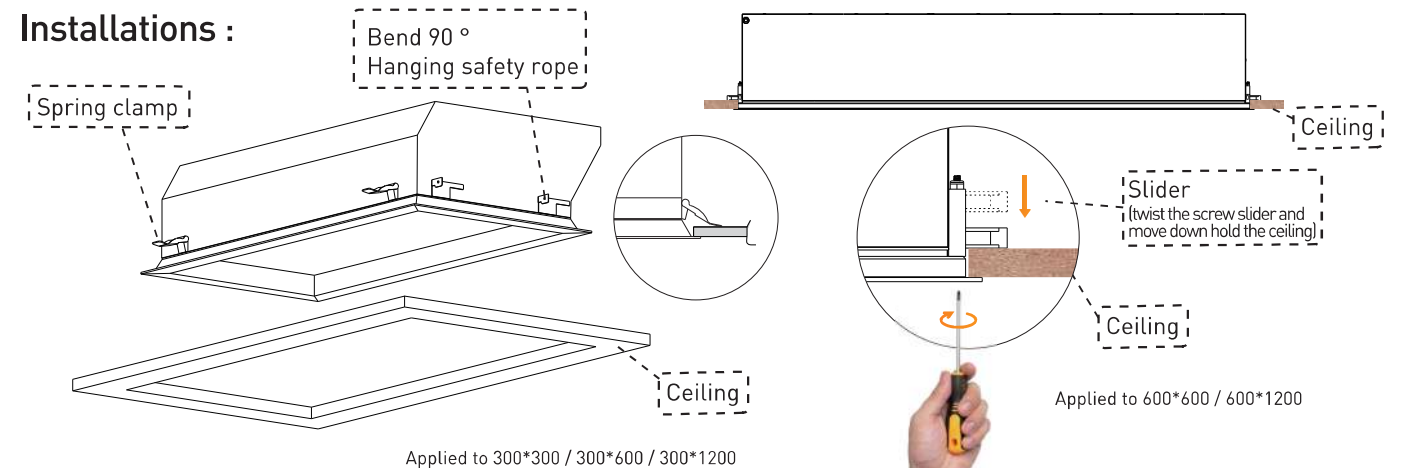

Sun Simulator Light

T series

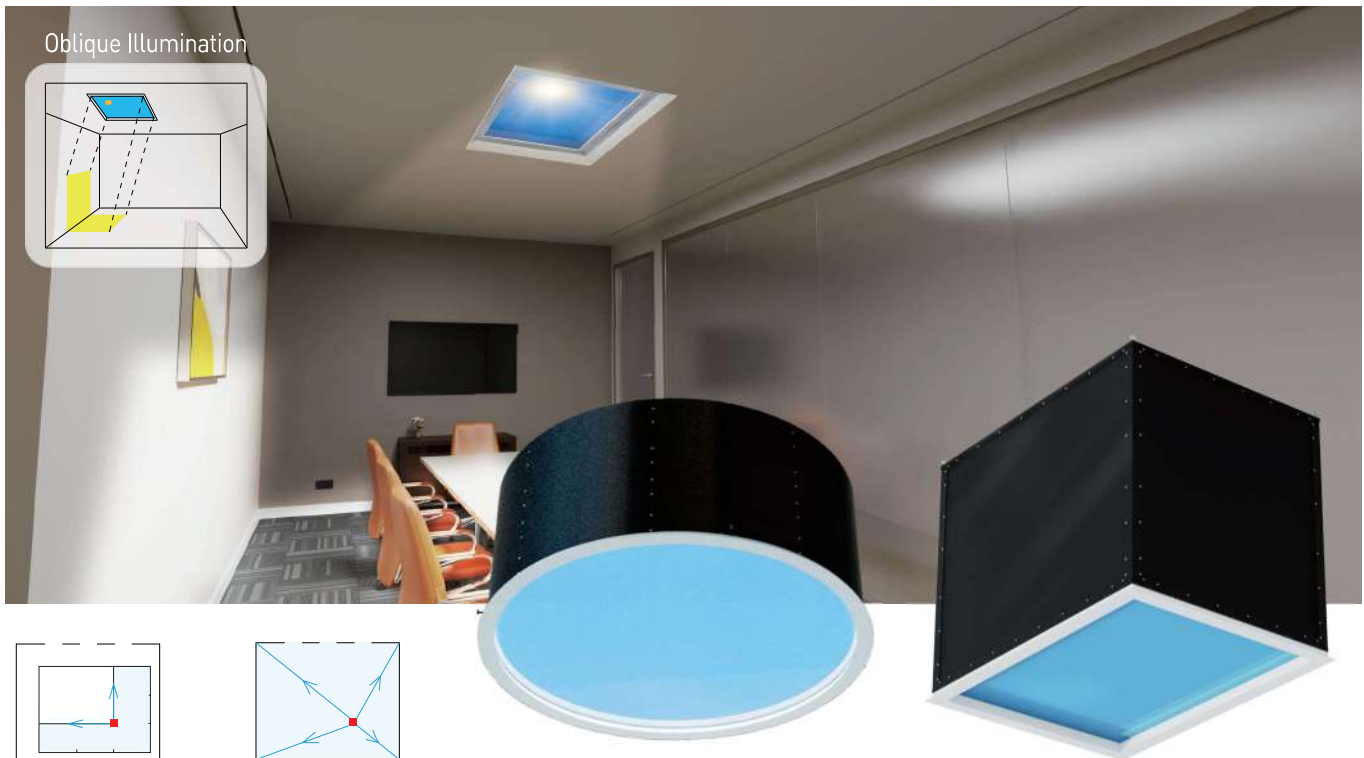


LED Optical module Light direction




Model No. 产品规格	Dimension WxHxT(mm)	Rated Power 额定功率	Hole Size 开孔尺寸(mm)	Light Surface 发光面尺寸(mm)	Lumen 光通量	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSSL-YRT6060-E300	600*600*450	300W	580*580	500*500	10000lm	6500K	1	62*62*47
XGYSSL-YRT94124-E500	940*1240*800	500W	1220*920	1120*820	20000lm	6500K	1	126*96*82
XGYSSL-YRT5060-E300	Φ600*380	300W	Φ585	Φ500	10000lm	6500K	1	62*62*40
XGYSSL-YRT100120-E500	Φ1200*680	500W	Φ1185	Φ1100	20000lm	6500K	1	122*120*70

Installations :


① Press the hole in the ceiling

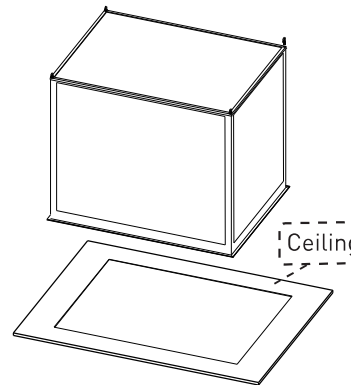

② Attach a traction system to the top of the wall to raise the light fixtures to level with the ceiling

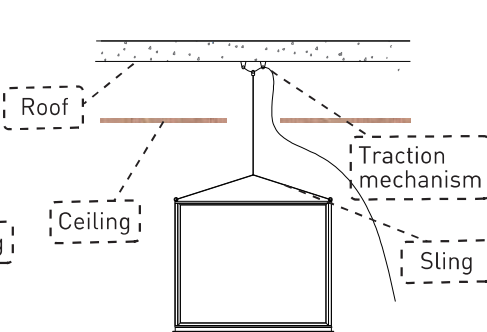

③ Fixed 4 safety Sling

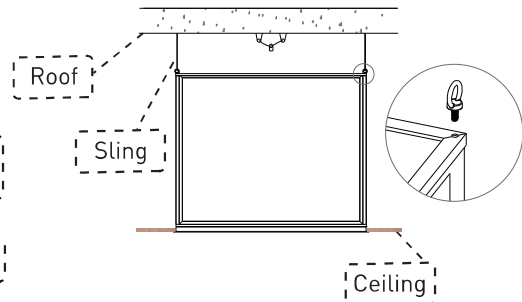

Warning:
The N.W. of the product is 50KG. Pay attention to the load-bearing installation.
The ceiling height is reserved for >1.2M (Reserved maintenance port)

LED Linear Fixtures



T5 Integrated LED Fixture



Adjust CCT button switch



Series system

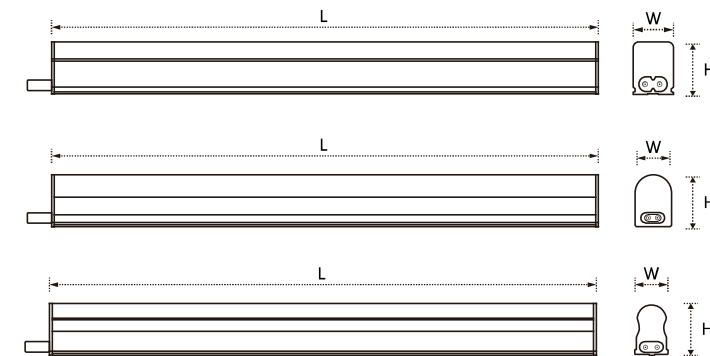


Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYT5F201-E5 XGYT5F701-E5	23*34*300	5W	80-160 lm/W	3000K-8000K	25	36*21*14
XGYT5F202-E9 XGYT5F702-E9	23*34*572	9W	80-160 lm/W	3000K-8000K	25	64*21*14
XGYT5F203-E12 XGYT5F703-E12	23*34*880	12W	80-160 lm/W	3000K-8000K	25	94*21*14
XGYT5F204-E18 XGYT5F704-E18	23*34*1178	18W	80-160 lm/W	3000K-8000K	25	124*21*14
XGYT5F205-E22 XGYT5F705-E22	23*34*1478	22/26W	80-160 lm/W	3000K-8000K	25	154*21*14

Lumen Efficacy is Customizable


LED Linear Fixtures

T8 Integrated LED Fixture

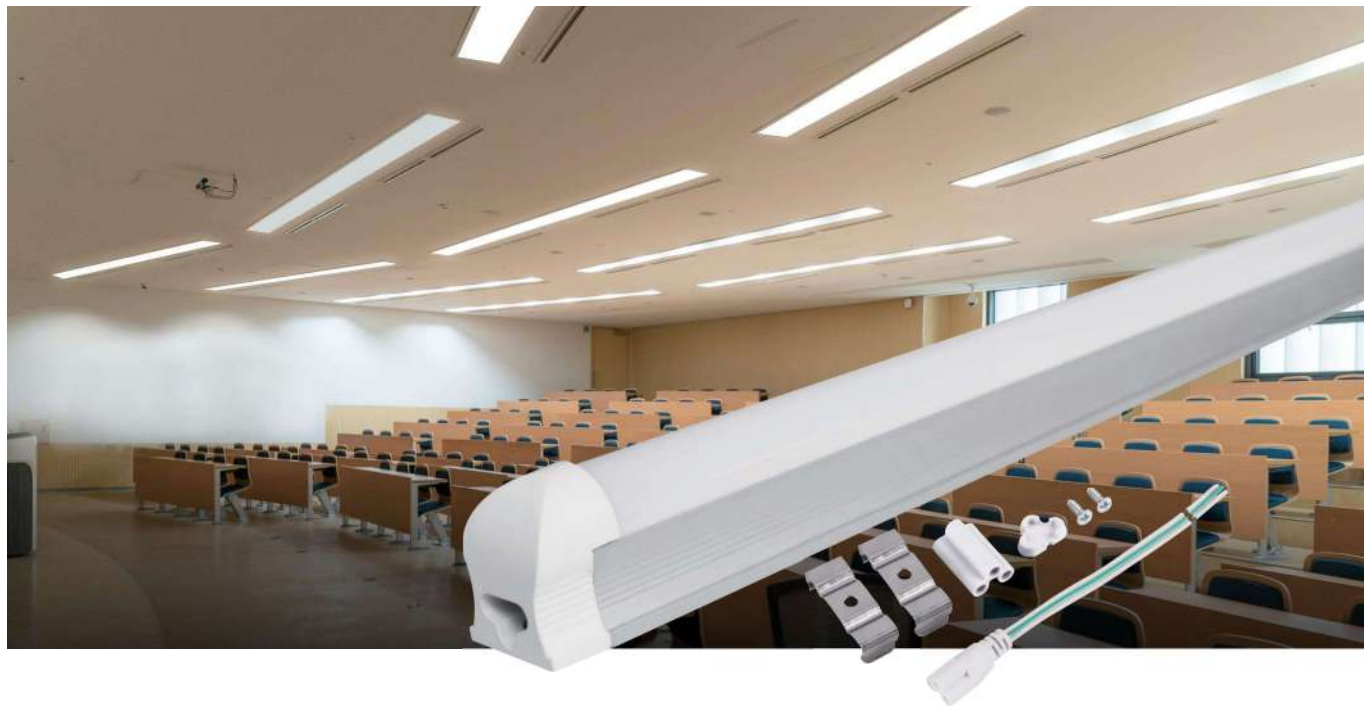

Features :

- High Quality SMD 2835 Chips of Optional Light Efficacy & CCT
- Single End Input. Support Multiple Connections
- No Light Flickering IC Driver
- ALU+PC / Full PC Body Option
- Plug-and-Socket / Male & Female Connectors Solutions, Optional Switches



CB CE ErP



No Flicker



Ra80



25000h



S: AC 180-265V
U: AC 85-265V



For Indoor



120°



0.5/0.9

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYT8F201-E5/10	30*36*300	5/10W	80-150 lm/W	3000K-8000K	25	36*20.5*18
XGYT8F202-E9/18	30*36*572	9/18W	80-150 lm/W	3000K-8000K	25	64*20.5*18
XGYT8F203-E12/24	30*36*880	12/24W	80-150 lm/W	3000K-8000K	25	94*20.5*18
XGYT8F204-E18/36	30*36*1178	18/36W	80-150 lm/W	3000K-8000K	25	124*20.5*18
XGYT8F205-E22/44	30*36*1478	22/44W	80-150 lm/W	3000K-8000K	25	154*20.5*18


✕ Lumen Efficacy is Customizable

LED Linear Fixture

Rotatable linear Fixture



6500K




4000K



3000K



Slide Switch
CCT Control+On/Off



- Interconnectable
- Beam Direction Adjustable 170°
- Optional 3 CCT / Dimmer Switch
- Full Plastic Body
- Optional Male / Female Base

CB CE ErP



No Flicker



Dimmable
Option



Ra80



25000h



S: AC 180-265V
U: AC 85-265V



For Indoor



170°



0.5/0.9

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYRLF701-E4	24*61*297	4W	80-160 lm/W	3000K-8000K	25	33.5*33*15
XGYRLF702-E8	24*61*536	8W	80-160 lm/W	3000K-8000K	25	57.5*33*15
XGYRLF703-E12	24*61*836	12W	80-160 lm/W	3000K-8000K	25	87.5*33*15
XGYRLF704-E16	24*61*1134	16W	80-160 lm/W	3000K-8000K	25	117.5*33*15
XGYRLF705-E20	24*61*1434	20W	80-160 lm/W	3000K-8000K	25	147.5*33*15

✕ Lumen Efficacy is Customizable

LED Linear Fixtures

Water-Proof LED Fixture (IP65)



CB CE ErP 



No Flicker



Ra80
70/80



25000h



S: AC 180-265V
U: AC 85-265V




For Outdoor



320°



0.5/0.9



TY-FCG02 Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-TY-FCG02-E9/18	58*47*562	9/18W	PG7	80-180 lm/W	3000K-8000K	25	585.5*32.5*27.5
XGYIP65-TY-FCG02-E12/24	58*47*862	12/24W	PG7	80-180 lm/W	3000K-8000K	25	885.5*32.5*27.5
XGYIP65-TY-FCG02-E18/36	58*47*1162	18/36W	PG7	80-180 lm/W	3000K-8000K	25	1185.5*32.5*27.5
XGYIP65-TY-FCG02-E24/40	58*47*1462	24/40W	PG7	80-180 lm/W	3000K-8000K	25	1485.5*32.5*27.5


 Lumen Efficacy is Customizable



SY-3090 Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-SY-3090-E9/18	50*34*520	9/18W	PG7	80-180 lm/W	3000K-8000K	25	66.5*29*21
XGYIP65-SY-3090-E12/24	50*34*820	12/24W	PG7	80-180 lm/W	3000K-8000K	25	96.5*29*21
XGYIP65-SY-3090-E18/36	50*34*1120	18/36W	PG7	80-180 lm/W	3000K-8000K	25	126.5*29*21
XGYIP65-SY-3090-E24/40	50*34*1420	24/40W	PG7	80-180 lm/W	3000K-8000K	25	156.5*29*21

 Lumen Efficacy is Customizable



JW-T07 Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-JW-T07-E9/18	60*30*520	9/18W	PG7	80-180 lm/W	3000K-8000K	25	56.5*22*17
XGYIP65-JW-T07-E12/24	60*30*820	12/24W	PG7	80-180 lm/W	3000K-8000K	25	86.5*22*17
XGYIP65-JW-T07-E18/36	60*30*1120	18/36W	PG7	80-180 lm/W	3000K-8000K	25	116.5*22*17
XGYIP65-JW-T07-E24/40	60*30*1420	24/40W	PG7	80-180 lm/W	3000K-8000K	25	146.5*22*17


 Lumen Efficacy is Customizable



TY-TS3001 Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-TY-TS3001-E9/18	485*45.3*29.4	9/18W	PG7	80-180 lm/W	3000K-8000K	25	56.5*27*20.5
XGYIP65-TY-TS3001-E12/24	785*45.3*29.4	12/24W	PG7	80-180 lm/W	3000K-8000K	25	86.5*27*20.5
XGYIP65-TY-TS3001-E18/36	1085*45.3*29.4	18/36W	PG7	80-180 lm/W	3000K-8000K	25	116.5*27*20.5
XGYIP65-TY-TS3001-E24/40	1385*45.3*29.4	24/40W	PG7	80-180 lm/W	3000K-8000K	25	146.5*27*20.5


 Lumen Efficacy is Customizable

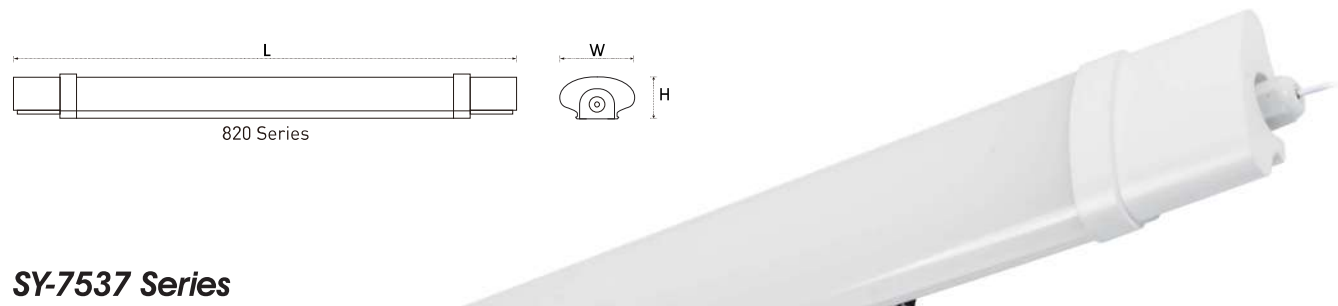

SY-7537 Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-SY-7537-E9/18	75*73*520	9/18W	PG7	80-180 lm/W	3000K-8000K	24	55.5*38*28
XGYIP65-SY-7537-E12/24	75*73*820	12/24W	PG7	80-180 lm/W	3000K-8000K	24	185.5*38*28
XGYIP65-SY-7537-E18/36	75*73*1120	18/36W	PG7	80-180 lm/W	3000K-8000K	24	127.5*38*28


☒ Lumen Efficacy is Customizable

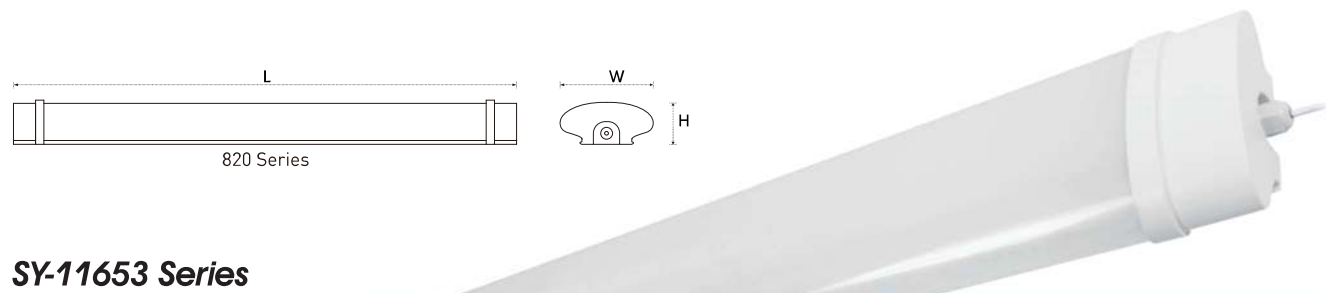

SY-11653 Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-SY-11653-E9/18	116*53*520	9/18W	PG7	80-180 lm/W	3000K-8000K	10	54.3*31*27.5
XGYIP65-SY-11653-E12/24	116*53*820	12/24W	PG7	80-180 lm/W	3000K-8000K	10	184.3*31*27.5
XGYIP65-SY-11653-E18/36	116*53*1120	18/36W	PG7	80-180 lm/W	3000K-8000K	10	126.5*31*27.5

☒ Lumen Efficacy is Customizable

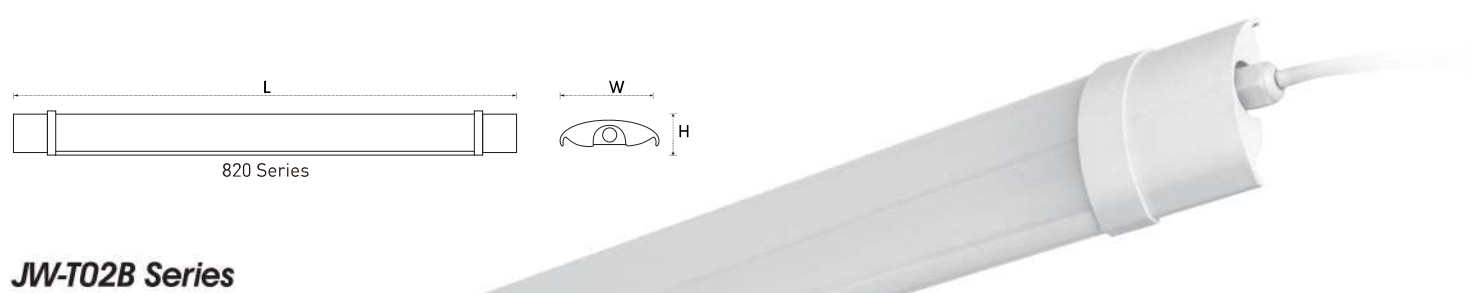

JW-T02B Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-JW-T02B-E9/18	68*43*520	9/18W	PG7	80-180 lm/W	3000K-8000K	25	54.3*37*25.5
XGYIP65-JW-T02B--E12/24	68*43*820	12/24W	PG7	80-180 lm/W	3000K-8000K	25	84.3*37*25.5
XGYIP65-JW-T02B-E18/36	68*43*1120	18/36W	PG7	80-180 lm/W	3000K-8000K	25	114.3*37*25.5
XGYIP65-JW-T02B-E24/40	68*43*1420	24/40W	PG7	80-180 lm/W	3000K-8000K	25	144.3*37*25.5

☒ Lumen Efficacy is Customizable


LED Linear Fixtures

Tri-Proof Fixture



Features :

- ☒ High Quality Triproof Fixture With or Without Tubes
Single or Double End Wiring
- ☒ Plastic / Stainless Steel Side Clamps
Stainless Steel Back Clips
- ☒ Optional PC / PS Cover with HIPS / ABS / PC Base
- ☒ Optional Tempered Glass with Stainless Steel Base
- ☒ Optional Rubber | Silicon Ring to Achieve IP65 Protection Level

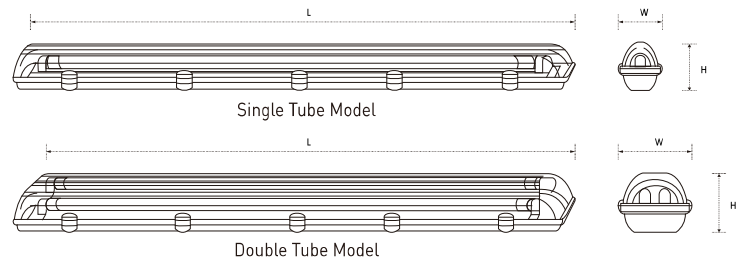

CB CE ErP



No Flicker



Ra80



25000h



S: 220-240V
U: 100-260V



For Outdoor



160°



0.5/0.9

SMD - OX Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Mount Distance 背扣间距	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYLEDTP-SOX02-E18/20	85*80*600	18/20W	100-160lm/W	3000K-6500K	260	8	62.5*36*19.5
XGYLEDTP-SOX04-E36/40/54	115*80*1200	36/40W/54W	100-160lm/W	3000K-6500K	810	8	122.5*36*19.5
XGYLEDTP-SOX05-E54/60	115*80*1500	54/60W	100-160lm/W	3000K-6500K	1110	6	152.5*27*19.5



SMD - OC Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Mount Distance 背扣间距	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸 (cm)
XGYLEDTP-SOC02-E40	80*70*605	40W	100-160lm/W	3000K-6500K	260	6	65*31*19

XGYLEDTP-SOS04-E60	80*70*1200	60W	100-160lm/W	3000K-6500K	810	6	125*31*19
--------------------	------------	-----	-------------	-------------	-----	---	-----------



SMD - OS Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Mount Distance 背扣间距	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸 (cm)
XGYLEDTP-SOS02-E20	105*78*600	20W	100-160lm/W	3000K-6500K	260	8	62*36*24

XGYLEDTP-SOS04-E40/60	105*78*1200	40/60W	100-160lm/W	3000K-6500K	810	8	122*36*24
-----------------------	-------------	--------	-------------	-------------	-----	---	-----------

XGYLEDTP-SOS05-E60/72	105*78*1500	60/72W	100-160lm/W	3000K-6500K	1110	6	152*25.5*24
-----------------------	-------------	--------	-------------	-------------	------	---	-------------

Shell - TS Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸 (cm)
XGYTP-TS02-E118	70*61*660	1*9W	310	6	1	12	68*22.5*24.5

XGYTP-TS02-E218	107*61*660	2*9W	310	6	2	8	68*22.5*24.5
-----------------	------------	------	-----	---	---	---	--------------

XGYTP-TS04-E136	70*61*1260	1*18W	910	10	1	12	128.5*22.5*24.5
-----------------	------------	-------	-----	----	---	----	-----------------

XGYTP-TS04-E236	107*61*1260	2*18W	910	10	2	8	128.5*22.5*24.5
-----------------	-------------	-------	-----	----	---	---	-----------------

XGYTP-TS05-E158	70*61*1562	1*24W	1210	14	1	12	159*22.5*24.5
-----------------	------------	-------	------	----	---	----	---------------

XGYTP-TS05-E258	107*61*1562	2*24W	1210	14	2	8	159*22.5*24.5
-----------------	-------------	-------	------	----	---	---	---------------

⚠ Power is Rated for Fluorescent Tubes



Shell - TX Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸 (cm)
XGYTP-TX-04-E136	66*50*1270	1*18W	1022	10	1	12	129.5*22*24

XGYTP-TX-04-E236	100*62*1270	2*18W	1022	10	2	10	130*28*24.5
------------------	-------------	-------	------	----	---	----	-------------



Shell - TW/TL Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸 (cm)
XGYTP-GX-02-E118	80*76*663	1*9W	350	6	1	12	68.5*24*24

XGYTP-GX-02-E218	100*76*663	2*9W	350	6	2	10	68*30*23
------------------	------------	------	-----	---	---	----	----------

XGYTP-GX-04-E136	80*76*1262	1*18W	750	10	1	12	128*24*24
------------------	------------	-------	-----	----	---	----	-----------

XGYTP-GX-04-E236	100*76*1262	2*18W	750	10	2	10	128*30*23
------------------	-------------	-------	-----	----	---	----	-----------

XGYTP-GX-05-E158	80*76*1560	1*24W	1224	12	1	12	158.5*26*24
------------------	------------	-------	------	----	---	----	-------------

XGYTP-GX-05-E258	100*76*1560	2*24W	1224	12	2	10	158.5*30*23
------------------	-------------	-------	------	----	---	----	-------------

Shell - HS Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸 (cm)
XGYTP-HS04-E136	70*84*1262	1*18W	750	8	1	12	129*26.5*24.5

XGYTP-HS04-E236	110*84*1262	2*18 W	750	8	2	8	129*26.5*25
-----------------	-------------	--------	-----	---	---	---	-------------

Shell - GA Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTP-GA-02-E118	70*60*661	1*9W	350	6	1	12	68.5*22*23.5
XGYTP-GA-02-E218	95*60*661	2*9W	350	6	2	10	68.5*27.5*21.5
XGYTP-GA-04-E136	70*60*1271	1*18W	760	10	1	12	129.5*22*24
XGYTP-GA-04-E236	95*60*1271	2*18W	760	10	2	10	129.5*27.5*21.5
XGYTP-GA-05-E158	70*60*1571	1*24W	1224	14	1	12	129.5*22*24
XGYTP-GA-05-E258	95*60*1571	2*24W	1224	14	2	10	159.5*27.5*21.5

Shell - G Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTP-GL02-E218	108*78*673	2*9W	470	6	2	8	68*24*24.5
XGYTP-GL04-E136	79*78*1262	1*18W	750	10	1	12	128*24*26.5
XGYTP-GL04-E236	108*78*1262	2*18W	750	10	2	8	128*24*24.5

Shell - GS Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTP-GS-02-E118	80*90*656	1*9W	470	6	1	12	68*28*26.5
XGYTP-GS-02-E218	115*90*656	2*9W	470	6	2	8	68*27*24.5
XGYTP-GS-04-E136	80*90*1260	1*18W	750	10	1	12	128*28*26.5
XGYTP-GS-04-E236	115*90*1260	2*18W	750	10	2	8	128*27*24.5
XGYTP-GS-05-E158	80*90*1560	1*24W	1015	12	1	8	158.5*28*18
XGYTP-GS-05-E258	115*90*1560	2*24W	1015	12	2	8	158.5*27*24.5


LED Linear Fixture

Connectable LED Shop Light



Features:

- Interconnectable Without Dark Area
- Alu+PC Body
- Hangable Installation
- High Power Linear Batten



CB CE ErP RoHS



No Flicker



Ra70/80



25000HRS



S: AC 180-265V
U: AC 85-265V



For Indoor



120°



0.5/0.9

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	IP Level IP等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYLF-L5-202-E18	50*45*590	18W	80-160 lm/W	3000K-8000K	IP40	12	63*24*17.5
XGYLF-L5-203-E26	50*45*885	26W	80-160 lm/W	3000K-8000K	IP40	12	92.5*24*17.5
XGYLF-L5-204-E34	50*45*1185	34W	80-160 lm/W	3000K-8000K	IP40	12	122.5*24*17.5
XGYLF-L5-205-E40	50*45*1485	40W	80-160 lm/W	3000K-8000K	IP40	12	152.5*24*17.5

Lumen Efficacy is Customizable

LED Linear Fixture

LED Purification Lamps



12





Full Plastic

Metal+Plastic

Features :

- Designed to Light in 5 Direction without Dark Area
- High Quality SMD 2835 Chips of Optional Light Efficacy & CCT
- Large Lighting Surface and High Lighting Power.
Support Multiple Connections. No Light Flickering IC Driver
- ALU+PC Body Material. PC Cover and End Cap
- Plug-and-Socket | Male & Female Connectors
Solutions, Optional Switches

Adjust CCT button switch

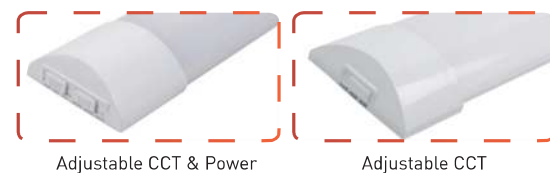

CB CE ErP



No Flicker



Ra70/80



25000HRS



S: AC 180-265V
U: AC 85-265V



For Indoor



120°



0.5/0.9

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYPL102-E18 [702/202]	75*22*600	18W	80-160 lm/W	3000K-8000K	10	62.5*16.5*18.5
XGYPL103-E24 [703/203]	75*22*900	24W	80-160 lm/W	3000K-8000K	10	92.5*16.5*18.5
XGYPL104-E36 [704/204]	75*22*1200	36W	80-160 lm/W	3000K-8000K	10	122.5*16.5*18.5
XGYPL105-E40 [705/205]	75*22*1500	40W	80-160 lm/W	3000K-8000K	10	152.5*16.5*18.5

Lumen Efficacy is Customizable

LED Linear Fixture

Prism Lens LED Linear Batten




13



Features:

- Opal or Prism Lens Cover
- High Power Linear Batten
- Metal Body + PC Caps



CB CE ErP



No Flicker



Dimmable
Option



Ra70/80



25000h



S: AC 180-265V
U: AC 85-265V



For Indoor



170°



>0.5

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	IP Level IP等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYLF-A76-104-E36/48	60*25*1200	36W	80-100lm/W	3000K-8000K	IP40	20	121.5*26*14
XGYLF-A775-104-E72	75*25*1200	72W	80-100lm/W	3000K-8000K	IP40	20	121.5*26*16.5
XGYLF-A790-104-E100	90*25*1200	100W	80-100lm/W	3000K-8000K	IP40	20	121.5*26*20
XGYLF-A7135-104-E120	135*30*1200	120W	80-100lm/W	3000K-8000K	IP40	20	121.5*31.5*15

Lumen Efficacy is Customizable

LED Ceiling Lamp

Metal Base(Regular Shape)



01



CB CE ErP 



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	IP Level 防护等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL1-LGARXX-E9	Φ205*85	9W	80 lm/W	3000K-6500K	Iron Base / PVC Cover PMMA Lens	IP20	20	47.5*44*44
XGYCL1-LGARXX-E12	Φ260*90	12W	80 lm/W	3000K-6500K	Iron Base / PVC Cover PMMA Lens	IP20	20	56*50*56
XGYCL1-LGARXX-E18	Φ330*95	18W	80 lm/W	3000K-6500K	Iron Base / PVC Cover PMMA Lens	IP20	20	70*52.5*70
XGYCL1-LGARXX-E24	Φ380*105	24W	80 lm/W	3000K-6500K	Iron Base / PVC Cover PMMA Lens	IP20	20	57.5*41*80

Remarks: XX is 01-10

LED Ceiling Lamp

Metal Base(Super Slim)



02



CB CE ErP 



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	IP Level 防护等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL1-LGSSXX-E18	Φ250*55	18W	70 lm/W	3000K-6500K	Iron Base / PVC Cover PMMA Lens	IP20	20	54*32.5*54
XGYCL1-LGSSXX-E24	Φ320*55	24W	70 lm/W	3000K-6500K	Iron Base / PVC Cover PMMA Lens	IP20	20	68*32.5*68
XGYCL1-LGSSXX-E36	Φ370*55	36W	70 lm/W	3000K-6500K	Iron Base / PVC Cover PMMA Lens	IP20	20	78*32.5*78
XGYCL1-LGSSXX-E48	Φ470*55	48W	70 lm/W	3000K-6500K	Iron Base / PVC Cover PMMA Lens	IP20	10	75*50*50

Remarks: XX is 01-28

LED Ceiling Lamp

Metal Base(Special Shape)



03



CB ErP

No Flicker

Ra80

25000h

S: AC 220-240V (LC)

120°

For Indoor

0.5

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	IP Level 防护等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-LG-PXX-E24	Φ350	24W*2	100 lm/W	3000K-6500K (Home Switch CCT)	Iron Base / PVC Cover PMMA Lens	IP20	10	83.5*45*43
XGYCL-LG-PXX-E36	Φ450	36W*2	100 lm/W	3000K-6500K (Home Switch CCT)	Iron Base / PVC Cover PMMA Lens	IP20	5	52.5*45*53

Remarks: XX is 01-28

04



LED Ceiling Lamp

Metal Base(Functional)



CUSTOMIZE LAMP SHAPE






Circular Disc



White Decor Ring



Silver Decor Ring

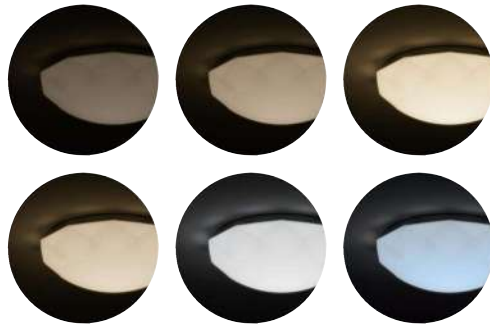

CB CE ErP



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	IP Level 防护等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL1-NLEMCD-E12	Φ260*60	12W	100 lm/W Module	3000K-6500K	IP20	8	50.5*28*29
XGYCL1-NLEMCD-E18	Φ280*60	18W	100 lm/W Module	3000K-6500K	IP20	8	54.5*30*31
XGYCL1-NLEMCD-E24	Φ330*60 Φ370*60	24W 20W@RGB	100 lm/W Module	3000K-6500K	IP20	8	54.5*35*36 54.5*39*40
XGYCL1-NLEMCD-E38	Φ480*60	36W	100 lm/W Module	3000K-6500K	IP20	5	51*37*52
XGYCL1-NLEMCD-E48	Φ570*65	48W	100 lm/W Module	3000K-6500K	IP20	5	59*39.5*60

Lumen Efficacy is Customizable

LED Ceiling Lamp

Metal Base(RGB Ambient & Decorative)



Adjust
Brightness



RGBW



DRGB



Adjust
CCT



Night Light
Function

DRGB
SCENE FREEZING
FUNCTION



CB CE ErP



Body Material

Iron Base
PMMA Double Cover
(Clear Prism &
Starry Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-CPS0D-E24	Φ400*65	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*34.5*44
XGYCL-SYRGB-CPS0D-E24 (8 Keys Remote)	Φ400*65	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-CPS0D-E24 (DRGB 12 Keys Remote)	Φ400*65	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-CPS0D-E40	Φ500*80	40W	65 lm/W	3000K-6500K	ON/OFF	4	55.5*40.5*55.5
XGYCL-SYRGB-CPS0D-E40 (8 Keys Remote)	Φ500*80	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	55.5*40.5*55.5
XGYCL-SYRGB-CPS0D-E40 (DRGB 12 Keys Remote)	Φ500*80	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	55.5*40.5*55.5

Lumen Efficacy is Customizable



Body Material

Iron Base
PMMA Double Cover
(Clear Prism2 &
Starry Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-CP2S0D-E24	Φ386*100	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*34.5*44
XGYCL-SYRGB-CP2S0D-E24 (8 Keys Remote)	Φ386*100	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-CP2S0D-E24 (DRGB 12 Keys Remote)	Φ386*100	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-CP2S0D-E40	Φ500*100	40W	65 lm/W	3000K-6500K	ON/OFF	4	55.5*40.5*55.5
XGYCL-SYRGB-CP2S0D-E40 (8 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	55.5*40.5*55.5
XGYCL-SYRGB-CP2S0D-E40 (DRGB 12 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	55.5*40.5*55.5

☒ Lumen Efficacy is Customizable

07



Body Material

Iron Base
PMMA Double Cover
(Smoky Donut &
Starry Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-SDS0D-E24	Φ385*100	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*48.5*44
XGYCL-SYRGB-SDS0D-E24 (8 Keys Remote)	Φ385*100	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*48.5*44
XGYCL-SYRGB-SDS0D-E24 (DRGB 12 Keys Remote)	Φ385*100	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*48.5*44
XGYCL-SYRGB-SDS0D-E40	Φ500*100	40W	65 lm/W	3000K-6500K	ON/OFF	4	56.5*48.5*56.5
XGYCL-SYRGB-SDS0D-E40 (8 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	56.5*48.5*56.5
XGYCL-SYRGB-SDS0D-E40 (DRGB 12 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	56.5*48.5*56.5

☒ Lumen Efficacy is Customizable



Body Material

Iron Base
PMMA Double Cover
(Smoky Donut &
Starry Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-SDS0D-E24	Φ385*100	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*48.5*44
XGYCL-SYRGB-SDS0D-E24 (8 Keys Remote)	Φ385*100	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*48.5*44
XGYCL-SYRGB-SDS0D-E24 (DRGB 12 Keys Remote)	Φ385*100	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*48.5*44
XGYCL-SYRGB-SDS0D-E40	Φ500*100	40W	65 lm/W	3000K-6500K	ON/OFF	4	56.5*48.5*56.5
XGYCL-SYRGB-SDS0D-E40 (8 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	56.5*48.5*56.5
XGYCL-SYRGB-SDS0D-E40 (DRGB 12 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	56.5*48.5*56.5

☒ Lumen Efficacy is Customizable



Body Material

Iron Base
PMMA Double Cover
(Grey Circular Triangle &
Starry Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-GCTS0D-E24	Φ400*65	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*34.5*44
XGYCL-SYRGB-GCTS0D-E24 (8 Keys Remote)	Φ400*65	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-GCTS0D-E24 (DRGB 12 Keys Remote)	Φ400*65	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-GCTS0D-E40	Φ500*80	40W	65 lm/W	3000K-6500K	ON/OFF	4	55.5*40.5*55.5
XGYCL-SYRGB-GCTS0D-E40 (8 Keys Remote)	Φ500*80	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	55.5*40.5*55.5
XGYCL-SYRGB-GCTS0D-E40 (DRGB 12 Keys Remote)	Φ500*80	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	55.5*40.5*55.5

☒ Lumen Efficacy is Customizable

08



Body Material

Iron Base
PMMA Double Cover
(Smoky Circular Triangle &
Starry Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-SCTS0D-E24	Φ400*65	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*34.5*44
XGYCL-SYRGB-SCTS0D-E24 (8 Keys Remote)	Φ400*65	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-SCTS0D-E24 (DRGB 12 Keys Remote)	Φ400*65	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-SCTS0D-E40	Φ500*80	40W	65 lm/W	3000K-6500K	ON/OFF	4	55.5*40.5*55.5
XGYCL-SYRGB-SCTS0D-E40 (8 Keys Remote)	Φ500*80	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	55.5*40.5*55.5
XGYCL-SYRGB-SCTS0D-E40 (DRGB 12 Keys Remote)	Φ500*80	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	55.5*40.5*55.5

☒ Lumen Efficacy is Customizable



Body Material

Iron Base
PMMA Double Cover
(Smoky Cover &
Starry Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-SCS0D-E24	Φ385*100	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*34.5*44
XGYCL-SYRGB-SCS0D-E24 (8 Keys Remote)	Φ385*100	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-SCS0D-E24 (DRGB 12 Keys Remote)	Φ385*100	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-SCS0D-E40	Φ500*100	40W	65 lm/W	3000K-6500K	ON/OFF	4	55.5*40.5*55.5
XGYCL-SYRGB-SCS0D-E40 (8 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	55.5*40.5*55.5
XGYCL-SYRGB-SCS0D-E40 (DRGB 12 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	55.5*40.5*55.5

☒ Lumen Efficacy is Customizable



Body Material

Iron Base
PMMA Decorative Cover
(Crystal Ring3 &
Starry Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-CR3SOD-E24	Φ386*100	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*34.5*44
XGYCL-SYRGB-CR3SOD-E24 (8 Keys Remote)	Φ386*100	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-CR3SOD-E24 (DRGB 12 Keys Remote)	Φ386*100	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-CR3SOD-E40	Φ500*100	40W	65 lm/W	3000K-6500K	ON/OFF	4	55.5*40.5*55.5
XGYCL-SYRGB-CR3SOD-E40 (8 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	55.5*40.5*55.5
XGYCL-SYRGB-CR3SOD-E40 (DRGB 12 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	55.5*40.5*55.5

☒ Lumen Efficacy is Customizable



Body Material

Iron Base
PMMA Decorative Cover
(Crystal Ring &
Starry Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-CRSOD-E24	Φ400*65	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*34.5*44
XGYCL-SYRGB-CRSOD-E24 (8 Keys Remote)	Φ400*65	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-CRSOD-E24 (DRGB 12 Keys Remote)	Φ400*65	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-CRSOD-E40	Φ500*80	40W	65 lm/W	3000K-6500K	ON/OFF	4	55.5*40.5*55.5
XGYCL-SYRGB-CRSOD-E40 (8 Keys Remote)	Φ500*80	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	55.5*40.5*55.5
XGYCL-SYRGB-CRSOD-E40 (DRGB 12 Keys Remote)	Φ500*80	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	55.5*40.5*55.5

☒ Lumen Efficacy is Customizable



Body Material

Iron Base
PMMA Decorative Cover
(Crystal Ring2 &
Starry Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-CR2SOD-E24	Φ400*65	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*34.5*44
XGYCL-SYRGB-CR2SOD-E24 (8 Keys Remote)	Φ400*65	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-CR2SOD-E24 (DRGB 12 Keys Remote)	Φ400*65	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-CR2SOD-E40	Φ500*80	40W	65 lm/W	3000K-6500K	ON/OFF	4	55.5*40.5*55.5
XGYCL-SYRGB-CR2SOD-E40 (8 Keys Remote)	Φ500*80	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	55.5*40.5*55.5
XGYCL-SYRGB-CR2SOD-E40 (DRGB 12 Keys Remote)	Φ500*80	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	55.5*40.5*55.5

☒ Lumen Efficacy is Customizable



Body Material

Iron Base
PMMA Double Cover
(Smoky Donut &
Starry Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-CDD-E24	Φ386*100	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*34.5*44
XGYCL-SYRGB-CDD-E24 (8 Keys Remote)	Φ386*100	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-CDD-E24 (DRGB 12 Keys Remote)	Φ386*100	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-CDD-E40	Φ500*100	40W	65 lm/W	3000K-6500K	ON/OFF	4	55.5*40.5*55.5
XGYCL-SYRGB-CDD-E40 (8 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	55.5*40.5*55.5
XGYCL-SYRGB-CDD-E40 (DRGB 12 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	55.5*40.5*55.5

☒ Lumen Efficacy is Customizable



Body Material

Iron Base
PMMA Decorative Cover
(Wooden Ring &
Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-WROD-E24	Φ386*100	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*34.5*44
XGYCL-SYRGB-WROD-E24 (8 Keys Remote)	Φ386*100	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-WROD-E24 (DRGB 12 Keys Remote)	Φ386*100	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-WROD-E40	Φ500*100	40W	65 lm/W	3000K-6500K	ON/OFF	4	55.5*40.5*55.5
XGYCL-SYRGB-WROD-E40 (8 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	55.5*40.5*55.5
XGYCL-SYRGB-WROD-E40 (DRGB 12 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	55.5*40.5*55.5

☒ Lumen Efficacy is Customizable



Body Material

Iron Base
PMMA Double Cover
(Smoky Donut &
Starry Opal Diffuser)



Model No. 产品规格	Dimension D*H(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL-SYRGB-WREL-R-E24	Φ386*100	24W	65 lm/W	3000K-6500K	ON/OFF	4	44*34.5*44
XGYCL-SYRGB-WREL-R-E24 (8 Keys Remote)	Φ386*100	24W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-WREL-R-E24 (DRGB 12 Keys Remote)	Φ386*100	24W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	44*34.5*44
XGYCL-SYRGB-WREL-R-E40	Φ500*100	40W	65 lm/W	3000K-6500K	ON/OFF	4	55.5*40.5*55.5
XGYCL-SYRGB-WREL-R-E40 (8 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	CCT/DIM/Timer 8 Keys IR Remote	4	55.5*40.5*55.5
XGYCL-SYRGB-WREL-R-E40 (DRGB 12 Keys Remote)	Φ500*100	40W	65 lm/W	3000K-6500K RGB	DRGB/CCT/DIM/Timer 12 Keys IR Remote	4	55.5*40.5*55.5

☒ Lumen Efficacy is Customizable

LED Ceiling Lamp

Full Plastic Downlight - HY03C Model



- Microwave Sensor
- Adjust Power 12W/18W
- Adjust 3 CCT
- Loop in Loop out
- Emergency

REPLACEABLE LIGHT SOURCE



Step 1



Step 2



Step 3



HY03C Front



HY03C Back



Removable For Lamps Interconnection
Loop-in Loop-out

CB CE ErP



No Flicker



Dimmable Option



Ra80



25000h



S:185-265V



For Indoor



160°



0.5




07

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	IP Level 防护等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL2-HY03C-E12/18	Φ320*65	12/18W	100 lm/W	3000K-6500K	PC Body/Cover ABS Face Ring	IP65	10	77*34*34

✕ Lumen Efficacy is Customizable

LED Ceiling Lamp

Full Plastic Downlight - HY05/06 Model

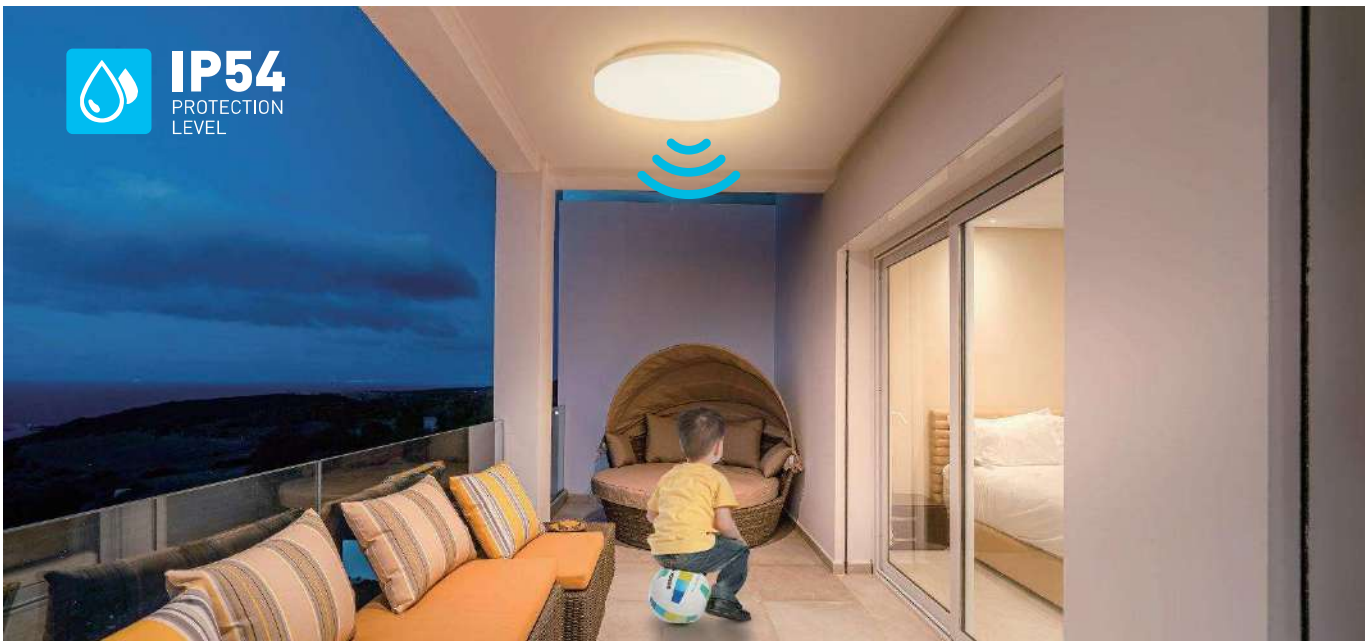

- Adjust 3 CCT
- Microwave Sensor
- Emergency



HY05 Front



HY05 Back



HY06 Front



HY06 Back

CB CE ErP



No Flicker



Dimmable Option



Ra80/90



25000h



S:185-265V



For Indoor



160°



0.5



10

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	IP Level 防护等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL2-HY05-E15	Φ220*50	15W	90 lm/W	3000K-6500K	Plastic	IP54	10	47*30*24.7
XGYCL2-HY05-E18	Φ280*50	18W	90 lm/W	3000K-6500K	Plastic	IP54	10	59.5*30*30.7
XGYCL2-HY05-E24	Φ330*50	24W	90 lm/W	3000K-6500K	Plastic	IP54	10	59.5*35*35.7
XGYCL2-HY06-E15	Φ220*50	15W	90 lm/W	3000K-6500K	Plastic	IP54	10	47*30*24.7
XGYCL2-HY06-E18	Φ280*50	18W	90 lm/W	3000K-6500K	Plastic	IP54	10	59.5*30*30.7
XGYCL2-HY06-E24	Φ330*50	24W	90 lm/W	3000K-6500K	Plastic	IP54	10	59.5*35*35.7

✕ Lumen Efficacy is Customizable

LED Ceiling Lamp


Full Plastic Downlight - HY08 Model




13

LED Ceiling Lamp

Full Plastic Downlight - HY09 Model

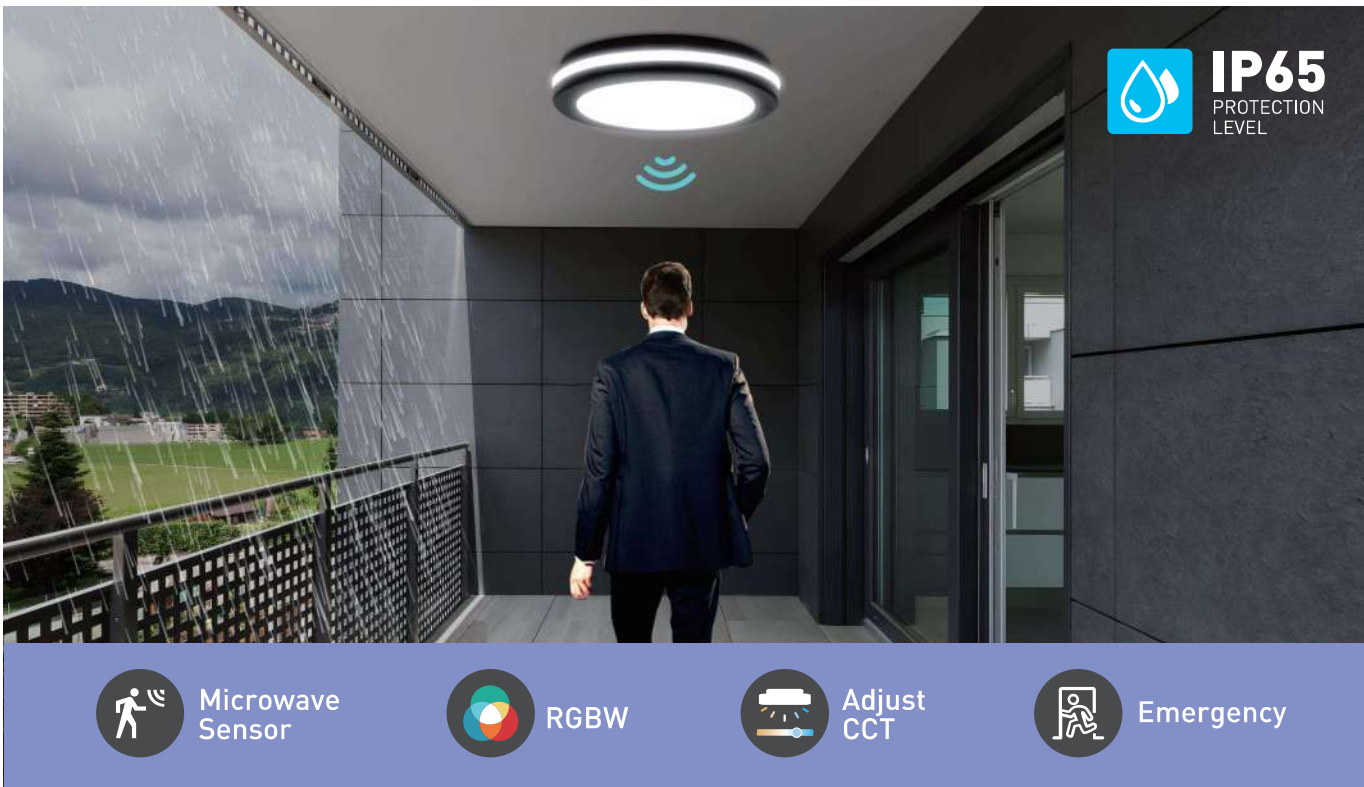

14

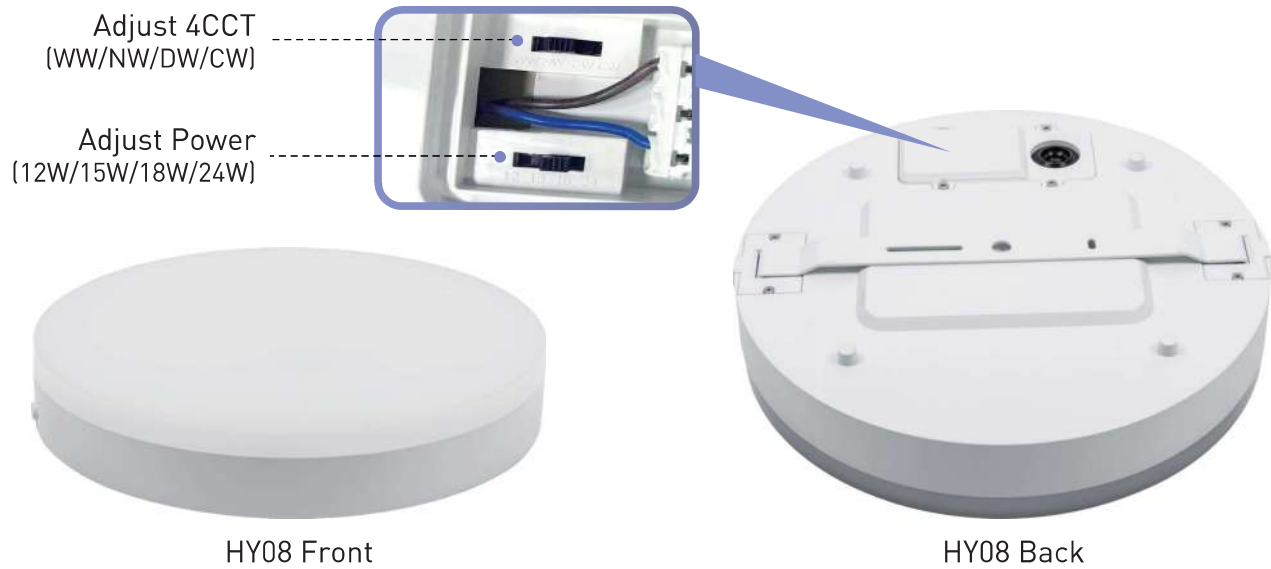

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	IP Level 防护等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL2-HY08-E18	Φ280*60	18W	85 lm/W	3000K-6000K	PC	IP65	10	66.5*30.2*30.2

✗ Lumen Efficacy is Customizable



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	IP Level 防护等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL2-HY09-E20	Φ200*55	20W	80 lm/W	3000K-6000K	PP	IP65	20	60*43.5*22.7
XGYCL2-HY09-E30	Φ300*55	30W	80 lm/W	3000K-6000K	PP	IP65	10	65*32*32.7
XGYCL2-HY09-E40	Φ400*55	40W	80 lm/W	3000K-6000K	PP	IP65	10	65.5*42*42.7

✗ Lumen Efficacy is Customizable

LED Ceiling Lamp

Full Plastic Downlight - HY17 Model



15



HY17 Front

HY17 Back

CB CE ErP



No Flicker



Dimmable
Option



Ra80



25000h



S:185-265V



For Indoor



160°



0.5



08

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	IP Level 防护等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL2-HY17-E18	Φ250*50	18W	80 lm/W	3000K-6000K	PP	IP54	20	55*39.5*78.5
XGYCL2-HY17-E24	Φ320*55	24W	80 lm/W	3000K-6000K	PP	IP54	20	55*33.5*66.5
XGYCL2-HY17-E32	Φ380*60	32W	80 lm/W	3000K-6000K	PP	IP54	20	55*27.5*52.7
XGYCL2-HY17-E40	Φ480*70	40W	80 lm/W	3000K-6000K	PP	IP54	10	50*63*50

Lumen Efficacy is Customizable

LED Ceiling Lamp

Full Plastic Edge Light - Ultra-Slim Flush Mount Model



16



Switch Control For CCT



3000K



4000K



6500K



HY12 White



HY12 Black



HY12 Wood

CB CE ErP



No Flicker



Ra80



25000h



S:185-265V



For Indoor



160°



0.5/0.9



08

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	IP Level 防护等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCL2-HY12-E18	Φ230*25	18W	80 lm/W	3000K-6500K	ABS Body/PS Cover PS LGP	IP20	20	32*32*26
XGYCL2-HY12-E24	Φ310*25	24W	80 lm/W	3000K-6500K	ABS Body/PS Cover PS LGP	IP20	20	32*32*33
XGYCL2-HY12-E32	Φ400*25	32W	80 lm/W	3000K-6500K	ABS Body/PS Cover PS LGP	IP20	10	32*32*43
XGYCL2-HY12-E40	Φ510*25	40W	80 lm/W	3000K-6500K	ABS Body/PS Cover PS LGP	IP20	10	48*48*54
XGYCL2-HY12-E50	Φ600*27	50W	80 lm/W	3000K-6500K	ABS Body/PS Cover PS LGP	IP20	5	48*48*63
XGYCL2-HY12-E70	Φ750*27	70W	80 lm/W	3000K-6500K	ABS Body/PS Cover PS LGP	IP20	5	48*48*78


Lumen Efficacy is Customizable

LED Ceiling Lamp

LED Ceiling Lamp Module



17

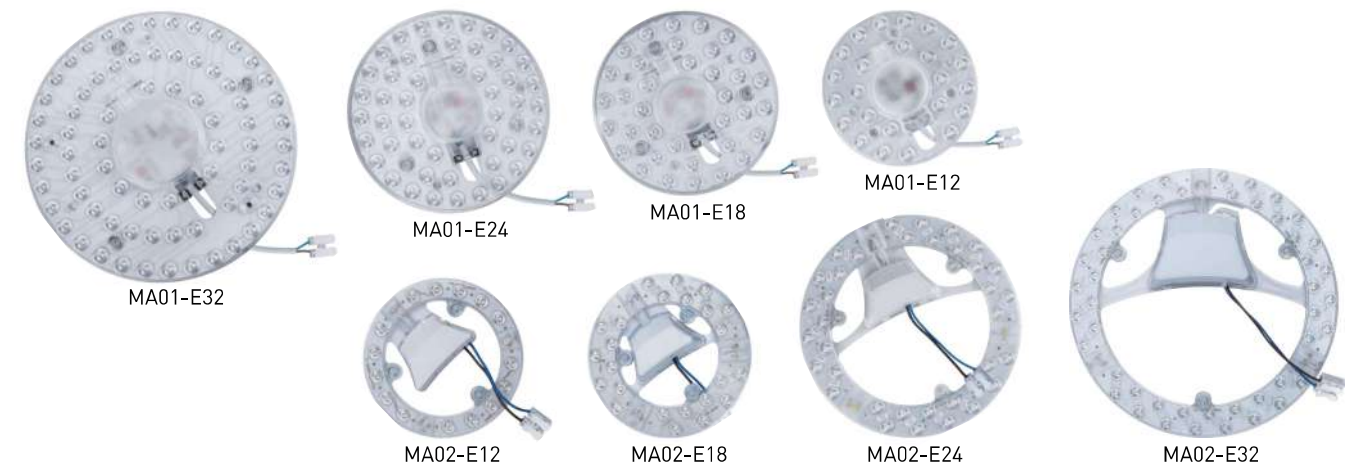

Model No. 产品规格	Dimension DxL(mm)	Rated Power 额定功率	Emiss. Direction 发光方向	Total Lumen 流明	Color Temp. 色温	Body Material 材质	Pins 引脚	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCLM-MA01-E12	Φ130*26	12W	Back Emission	1200lm	3000/4000/6500K (DIP/Switch CCT Option)	PC	Wire (w/wo Terminal)	10	15.1*15.1*27.3
XGYCLM-MA01-E18	Φ155*26	18W	Back Emission	1800lm	3000/4000/6500K (DIP/Switch CCT Option)	PC	Wire (w/wo Terminal)	10	20.7*20.7*27.3
XGYCLM-MA01-E24	Φ168*28	24W	Back Emission	2400lm	3000/4000/6500K (DIP/Switch CCT Option)	PC	Wire (w/wo Terminal)	10	26.1*26.1*27.3
XGYCLM-MA01-E32	Φ230*28	32W	Back Emission	3200lm	3000/4000/6500K (DIP/Switch CCT Option)	PC	Wire (w/wo Terminal)	10	34.4*34.4*27.3
XGYCLM-MA02-E12	Φ134*20	12W	Back Emission	1200lm	3000/4000/6500K	PC	Wire (w/wo Terminal)	30	36.5*31*18
XGYCLM-MA02-E18	Φ138*26	18W	Back Emission	1800lm	3000/4000/6500K	PC	Wire (w/wo Terminal)	30	41*31*18
XGYCLM-MA02-E24	Φ185*26	24W	Back Emission	2400lm	3000/4000/6500K	PC	Wire (w/wo Terminal)	30	41*41*23
XGYCLM-MA02-E32	Φ230*26	32W	Back Emission	3200lm	3000/4000/6500K	PC	Wire (w/wo Terminal)	30	50*36.5*27.3


⚠ Lumen Efficacy is Customizable

LED Ceiling Lamp

LED Bulk Head



18



Model No. 产品规格	Dimension WxHxT(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYMPL-HZ-BL140CP05-E7 (Round)	Φ140*48	7W	90 lm/W	3000K-6500K	PP Body+ PC Cover	60	63*29*35
XGYMPL-HZ-BL170CP05-E11 (Round)	Φ170*50	11W	90 lm/W	3000K-6500K	PP Body+ PC Cover	60	63*29*35
XGYMPL-HZ-BL160EP05-E7 (Oval)	160*90*51	7W	90 lm/W	3000K-6500K	PP Body+ PC Cover	40	63*21*40
XGYMPL-HZ-BL205EP05-E11 (Oval)	205*105*54	11W	90 lm/W	3000K-6500K	PP Body+ PC Cover	40	63*21*40
XGYMPL-HZ-CL220CP01-E18 (Round)	Φ220*54	18W	90 lm/W	2700K-6500K	PP Body+ PC Cover	50	58*33*45
XGYMPL-HZ-CL280CP01-E24 (Round)	Φ280*54	24W	90 lm/W	2700K-6500K	PP Body+ PC Cover	50	58*33*45
XGYMPL-HZ-CL330CP01-E30 (Round)	Φ330*54	30W	90 lm/W	2700K-6500K	PP Body+ PC Cover	40	63*31*31
XGYMPL-HZ-CL220SP01-E18 (Square)	220*220*54	18W	90 lm/W	2700K-6500K	PP Body+ PC Cover	40	63*31*31
XGYMPL-HZ-CL280SP01-E24 (Square)	280*280*54	24W	90 lm/W	2700K-6500K	PP Body+ PC Cover	40	63*35*35



LED Fan Light

Ceiling Mount (with Grid)



LED Fan Light

Ceiling Mount (with Grid & RGB)

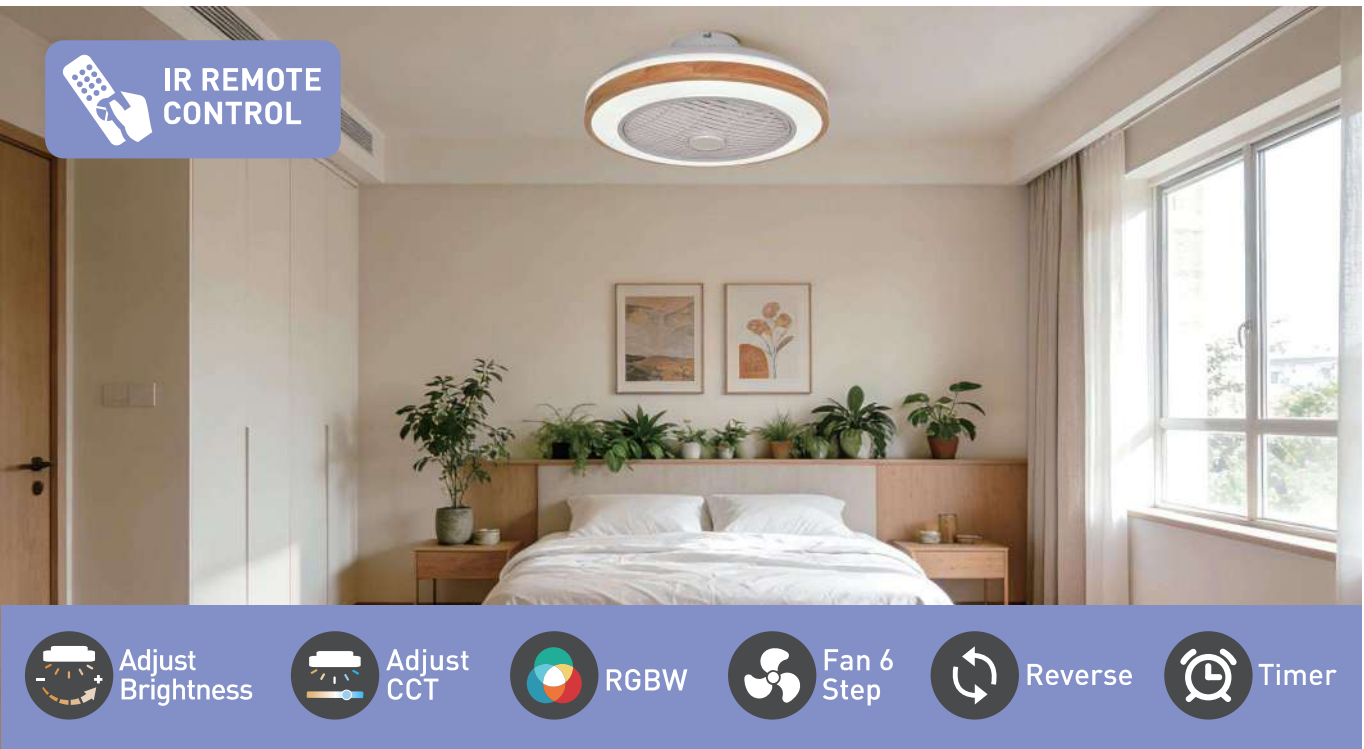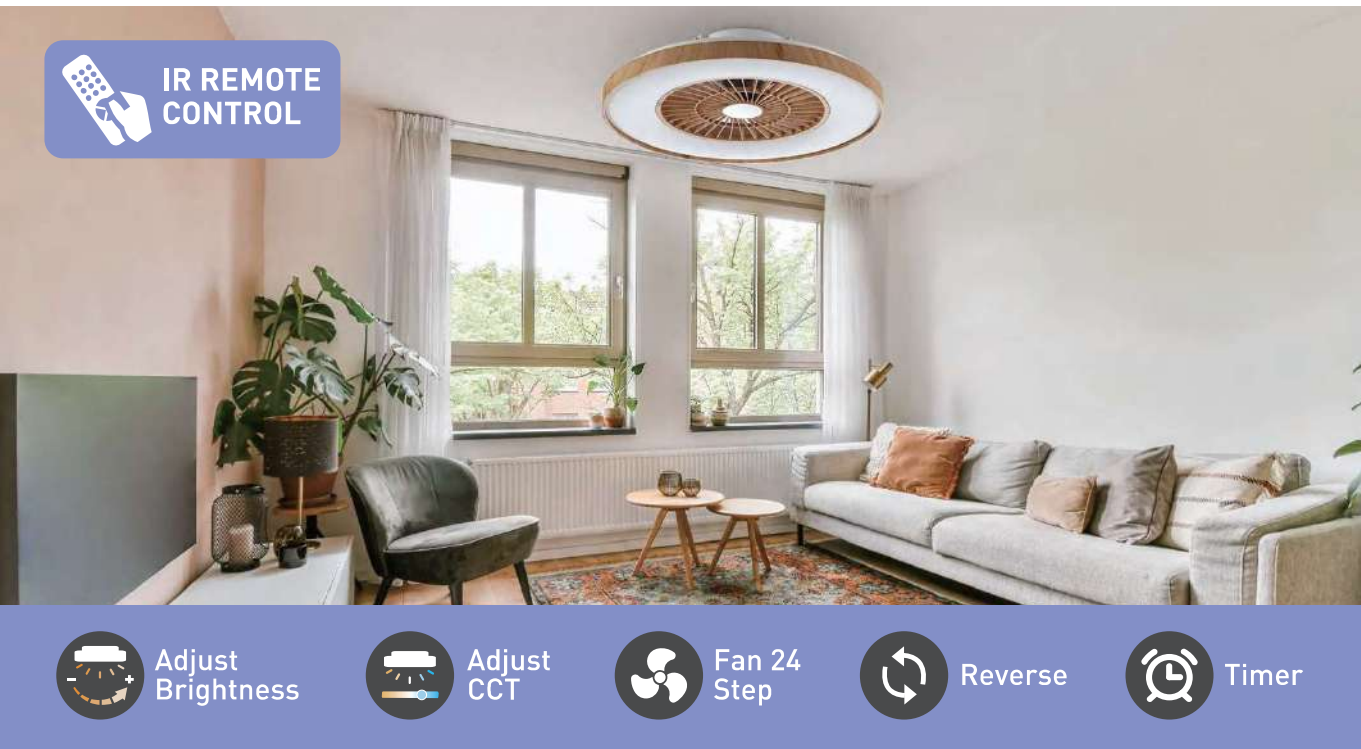

Model No. 产品规格	Dimension DxL(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFANCL-BK323052-1/2 -E55/60 (Starry/Opal)	Φ600*170	Light: Max 40W Fan: Max 15/20W HF	110 lm/W	3000K-5500K	PP Base / MS Diffuser PC Blade / PP Grid	1	65*65*21
XGYFANCL-BK323052-3/4 -E55/60 (Starry/Opal)	Φ604*170	Light: Max 40W Fan: Max 15/20W HF	110 lm/W	3000K-5500K	PP Base / MS Diffuser PC Blade / PP Grid	1	65*65*21
XGYFANCL-BK323052-5/6 -E55/60 (Starry/Opal)	Φ604*170	Light: Max 40W Fan: Max 15/20W HF	110 lm/W	3000K-5500K	PP Base / MS Diffuser PC Blade / PP Grid	1	65*65*21
XGYFANCL-BK323052-7/8 -E55/60 (Starry/Opal)	Φ604*170	Light: Max 40W Fan: Max 15/20W HF	110 lm/W	3000K-5500K	PP Base / MS Diffuser PC Blade / PP Grid	1	65*65*21
XGYFANCL-BK323146-1/2 -E55 (Starry/Opal)	Φ480*148	Light: Max 40W Fan: Max 15W HF	110 lm/W	3000K-5500K	PP Base / MS Diffuser PC Blade / PP Grid	1	53*53*16.5
XGYFANCL-GJ23053-E62	Φ600*210	Light: Max 42W Fan: Max 20W HF	60 lm/W	3500K-6800K	PS+PMMA	1	65*65*23

Model No. 产品规格	Dimension DxL(mm)	Rated Power 额定功率	Lumen 流明	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFANCL-JLSFSD-E36	Φ460*140	Light: Max 24W Fan: Max 12W HF	3000lm	3000K-6500K	PP	1	48*48*16
XGYFANCL-JLSFSD002-E36	Φ495*140	Light: Max 24W Fan: Max 12W HF	3000lm	3000K-6500K	PP	1	51.5*51.5*16
XGYFANCL-JLSFSD005-E36	Φ495*140	Light: Max 24W Fan: Max 12W HF	3000lm	3000K-6500K	PP	1	51.5*51.5*16
XGYFANCL-JLSFSD014-E36	Φ495*140	Light: Max 24W Fan: Max 12W HF	3000lm	3000K-6500K	PP	1	51.5*51.5*16
XGYFANCL-JLSFSD015-E36	Φ495*140	Light: Max 24W Fan: Max 12W HF	3000lm	3000K-6500K	PP	1	51.5*51.5*16
XGYFANCL-GJ23055-E62	Φ500*225	Light: Max 42W Fan: Max 20W HF	2500lm	3500K-6800K	PS+PMMA	1	54*25*54



LED Fan Light

Ceiling Mount (without Grid)



LED Fan Light

Ceiling Mount (with Collapsible Blades)

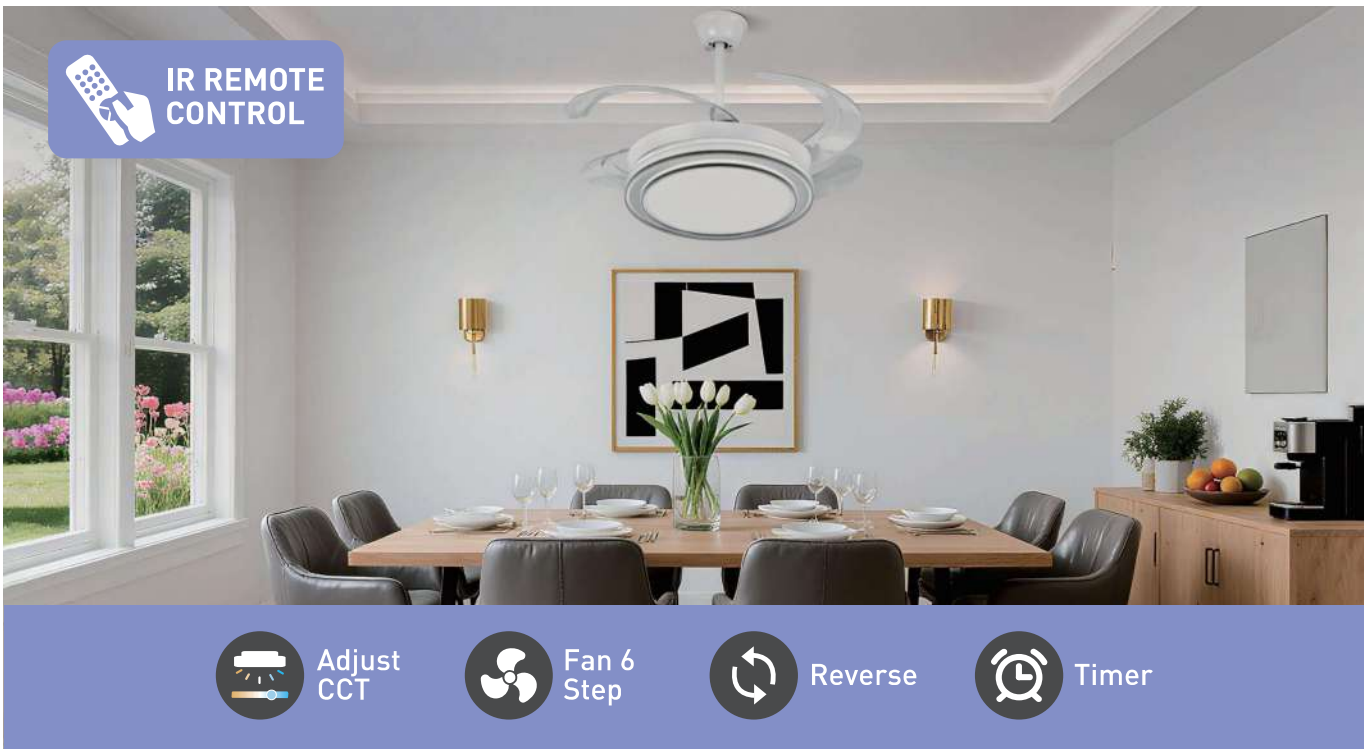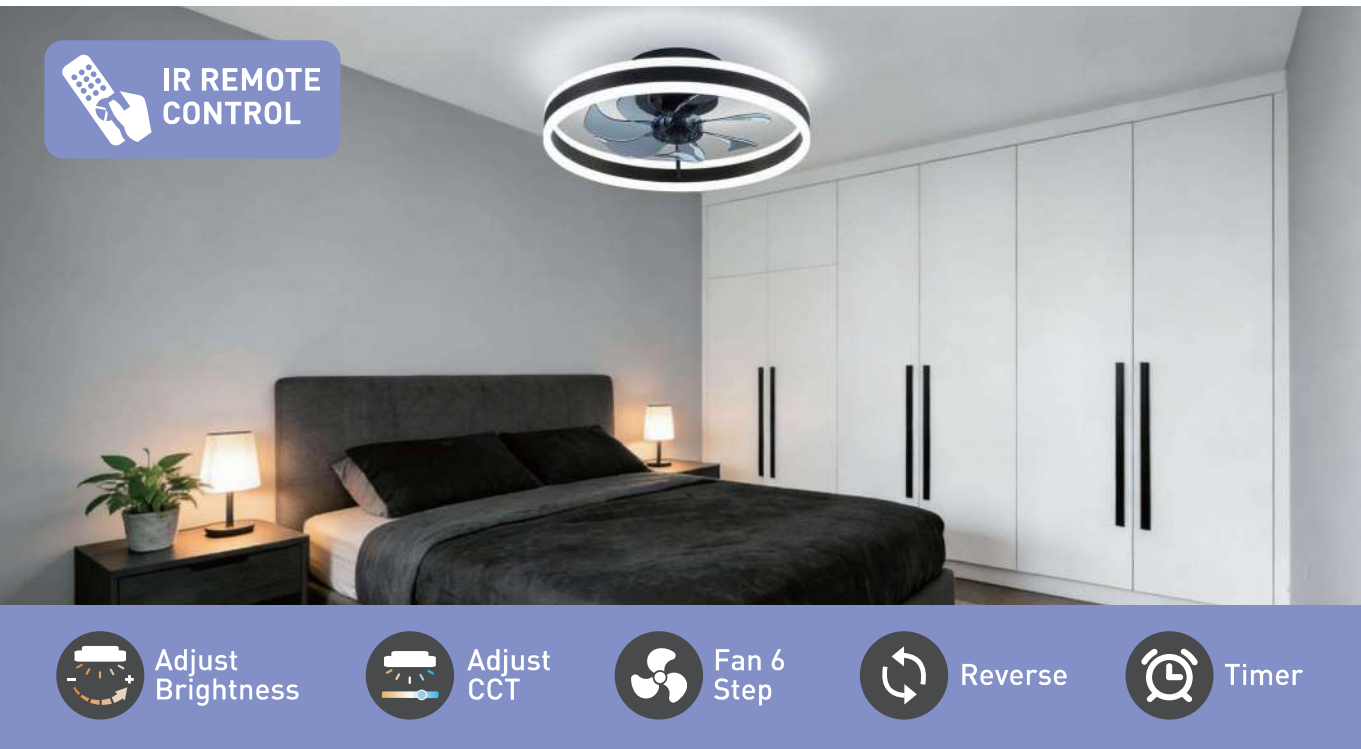

Model No. 产品规格	Dimension DxL(mm)	Rated Power 额定功率	Lumen 流明	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFANCL-BK323116-2 -E55 (Colour Ring)	Φ550*185	Light: Max 40W Fan: Max 15W HF	110 lm/W	3000K-5500K	PP Base / MS Diffuser PC Blade / PP Grid	1	59*59*21
XGYFANCL-GJ22005-E62	Φ500*170	Light: Max 42W Fan: Max 20W HF	60 lm/W	3500K-6800K	Iron+Alu+PS	1	54*54*21
XGYFANCL-GJ22020-E62	Φ500*160	Light: Max 42W Fan: Max 20W HF	60 lm/W	3500K-6800K	Iron+PS	1	54*54*21
XGYFANCL-GJ22007-E62	Φ500*170	Light: Max 42W Fan: Max 20W HF	60 lm/W	3500K-6800K	Iron+PMMA	1	54*54*21
XGYFANCL-GJ23091-E62	Φ500*165	Light: Max 42W Fan: Max 20W HF	60 lm/W	3500K-6800K	PS	1	54*54*21
XGYFANCL-GJ23093-E62	Φ380*165	Light: Max 42W Fan: Max 20W HF	60 lm/W	3500K-6800K	PS	1	42*42*21



Model No. 产品规格	Dimension DxL(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFANCL-HSXXXX-E90	Φ1100*100/200	Light: Max 66W Fan: Max 23.5W HF	90 lm/W	3000K-6500K CCT	Iron+PP	1	53*53*16.5

Remarks: XXXX is 4217/4219/4220/4240/4252/0030



LED Fan Light

Ceiling Mount (Bladeless / Hidden)




LED Fan Light

Ceiling Mount (Rectangular Bladeless)

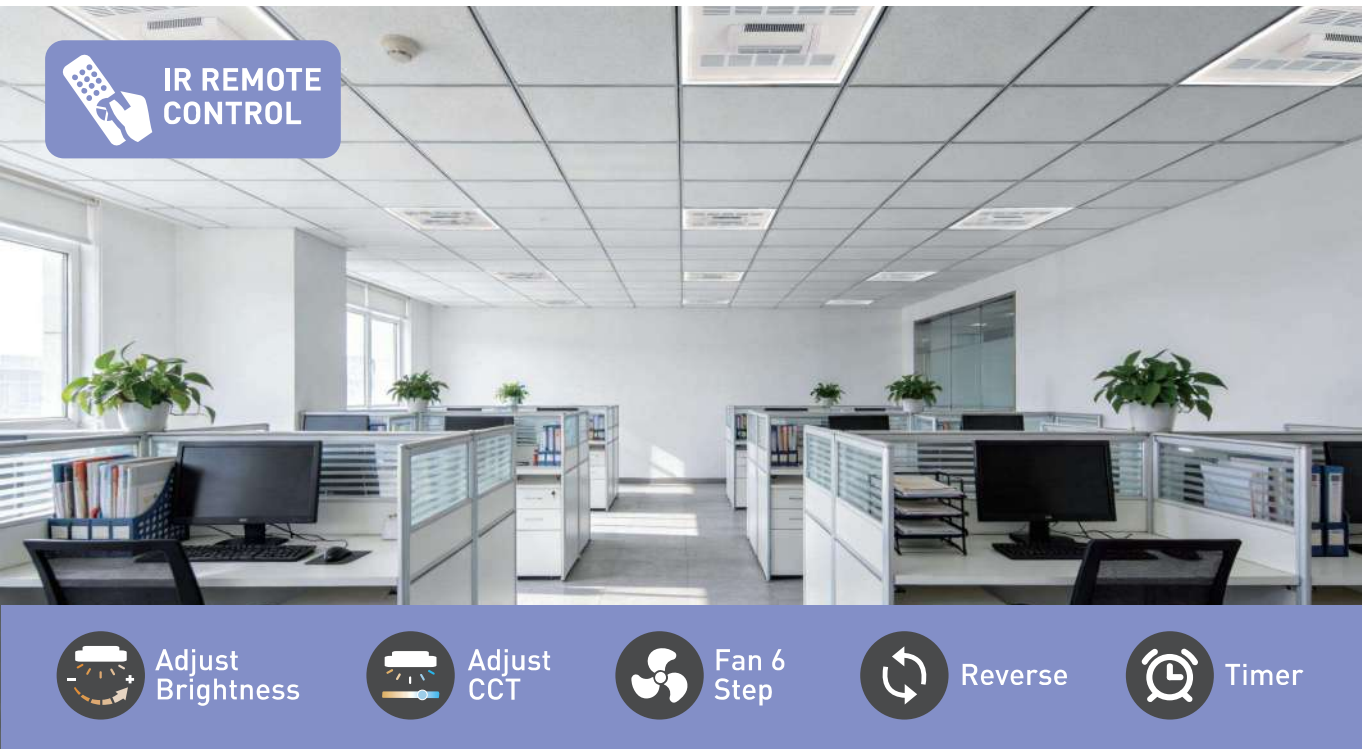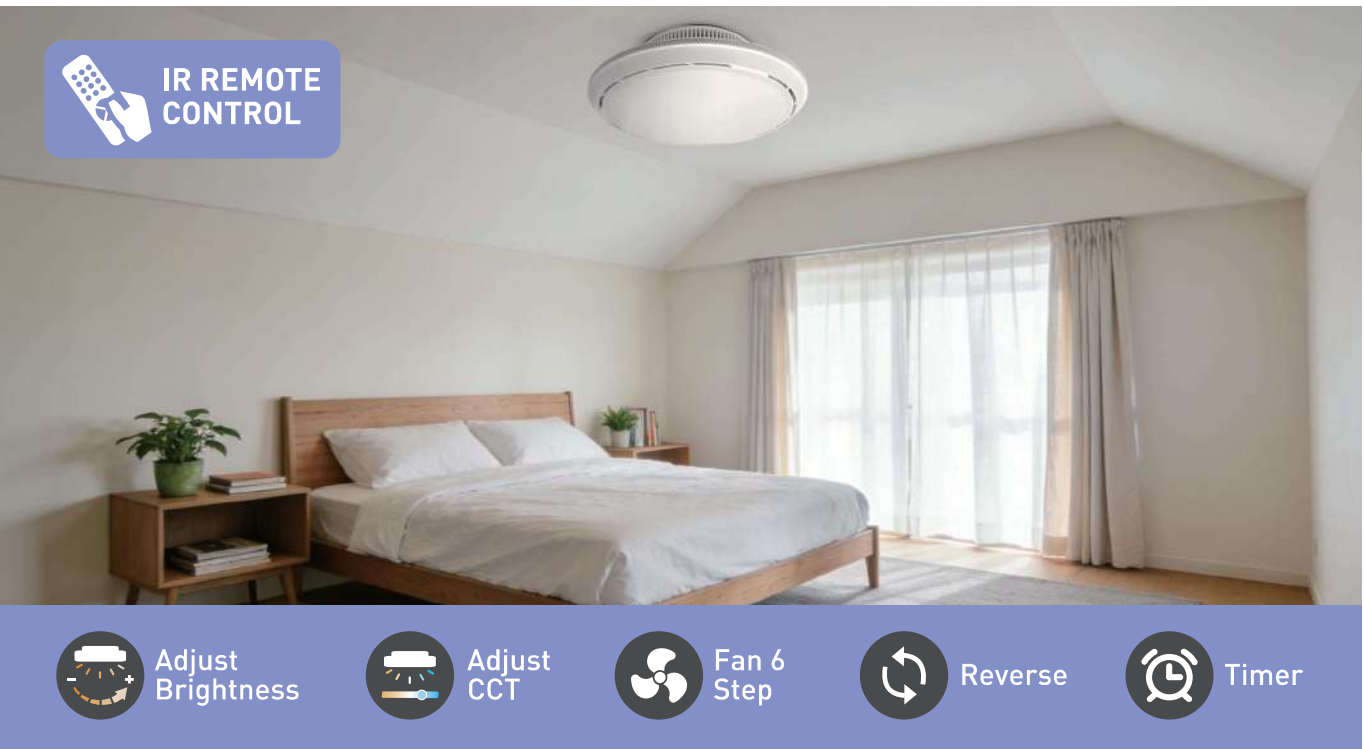

Model No. 产品规格	Dimension DxL(mm)	Rated Power 额定功率	Lumen 流明	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFANCL-JLWYFS01-E50	Φ450*180	Light: Max 30W Fan: Max 20W HF	3600lm	3000K/4000K/6500K	PP+MS	1	47*47*20
XGYFANCL-VCFW45-E70	Φ450*240	Light: Max 50W Fan: Max 20W HF	5500lm	3000K/4000K/6500K	PC+PMMA	1	47*47*26
XGYFANCL-KSBL10-E68	Φ450*200	Light: Max 48W Fan: Max 20W HF	2200lm	3000K-6000K	Plastic+Metal	1	50*50*24
XGYFANCL-KSSL07-E79	Φ510*210	Light: Max 56W Fan: Max 23W HF	2500lm	3000K-6000K	Plastic+Metal	1	56*56*25
XGYFANCL-KSBL02-E74/66	Φ480*240	Light: Max 56W Fan: Max 10/18W HF	2400lm	3000K-6000K	Plastic+Metal	1	53*53*27




Model No. 产品规格	Dimension DxL(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFANCL-ML5801-E80	Φ600*600*70	Light: Max 25W*2 Fan: Max 30W HF	80lm/W	3000K/4000K/6500K	Iron Art+Acrylic +silicon	1	70*70*21

LED Fan Light


Edison Screw (Fan Shape With Grid / Without Grid)



25

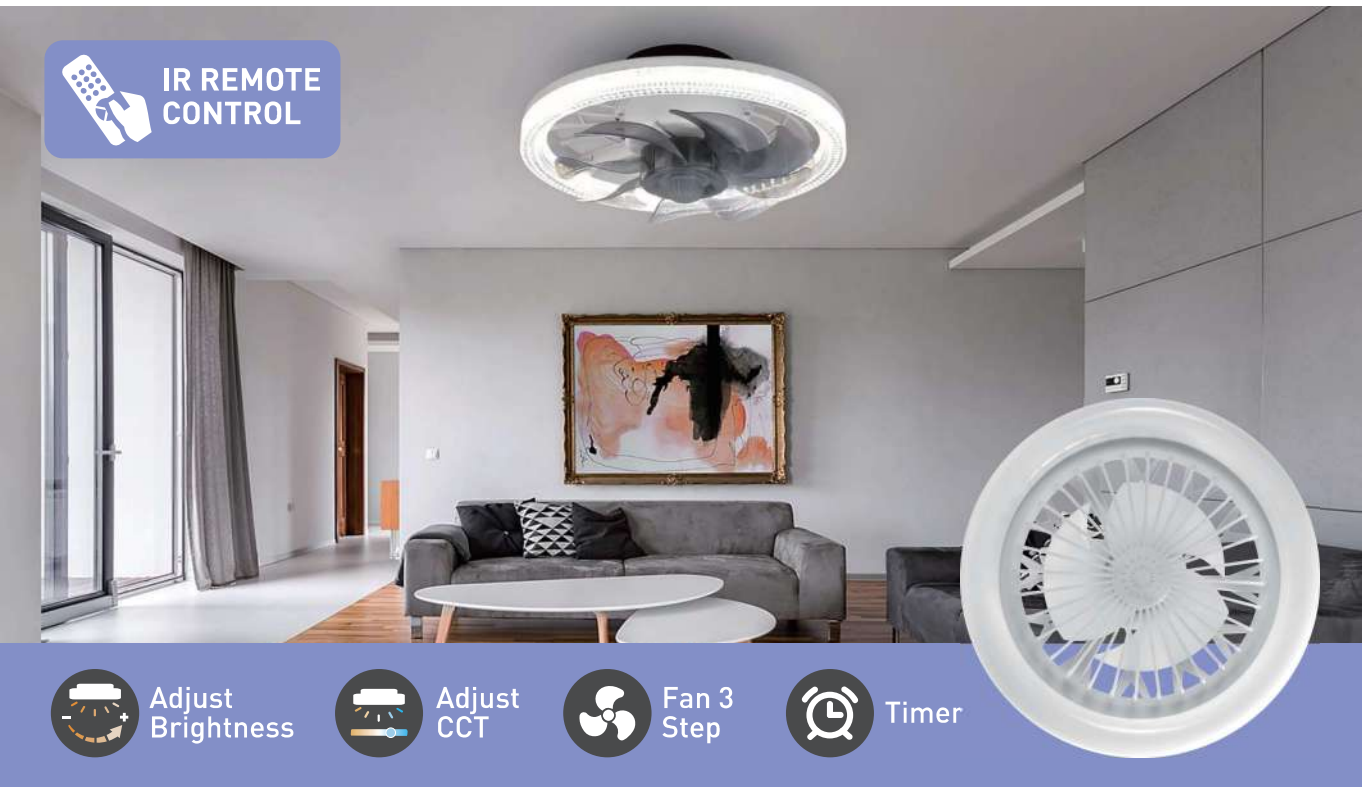

CB CE ErP 



HS-UH-E29
(Universal Head E27)



HS-FH-E29
(Fix E27)



QH-QWF3101-E47
(Opal Cover)


Model No. 产品规格	Dimension DxL(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFANCL-HS-UH-E29 (Universal Head E27)	Φ260*172	22/7W	85 lm/W	3000K-7000K	PP	30	79.5*48*54
XGYFANCL-HS-FH-E29 (Fix E27)	Φ260*115	22/7W	85 lm/W	3000K-7000K	PP	30	79.5*48*54
XGYFANCL-QWF3101-E47 (Opal Cover)	Φ310*130	13/34W	80 lm/W	3000K-7000K	PP+PS	10	74*32.5*64

LED Fan Light

Edison Screw (Bulb Shape Mounted Blades)



26

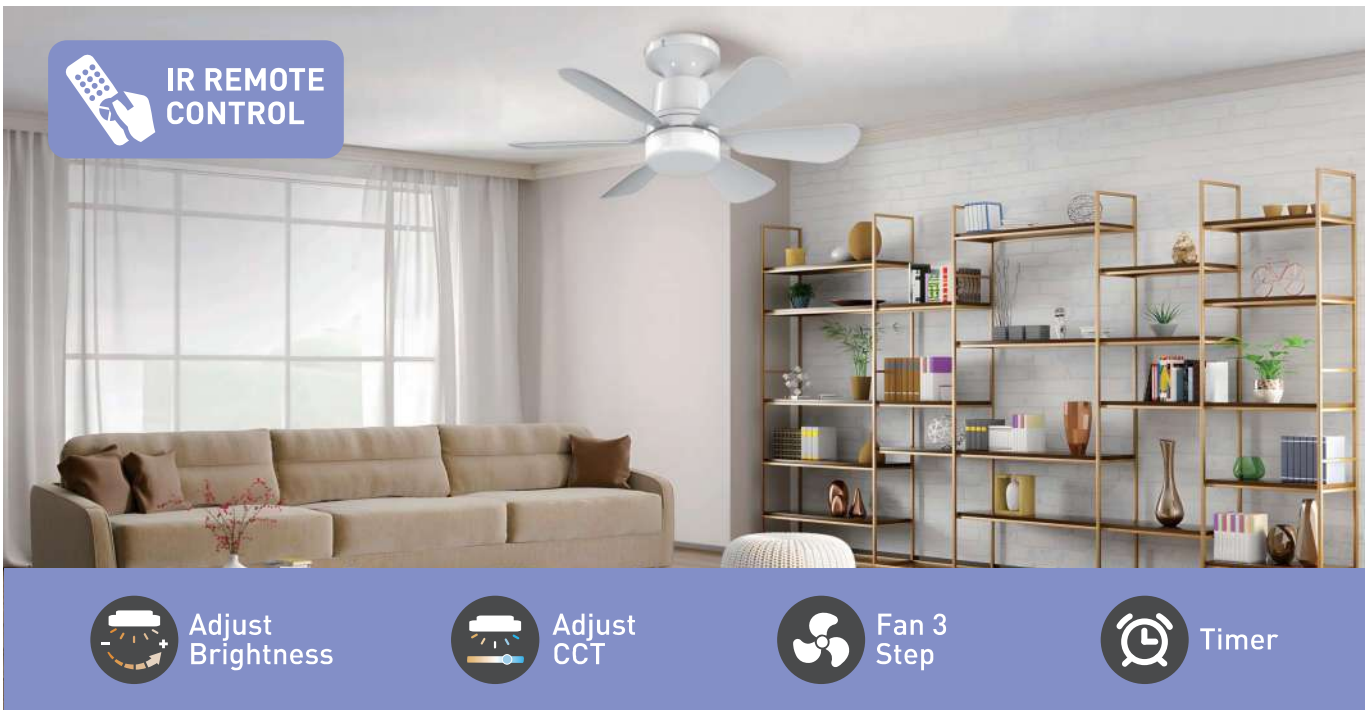

CB CE ErP 



XGYFANCL-HS-HG-E35(E27/Rod/Ceiling)

Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Bulb: Φ125*186 Fan: Φ520*186	20/15W	75lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
PP+ABS+ Nylon/ALU	IR Remote/CCT/Brightness Fan 3 Step/Timer	24	52.5*42.5*44.5



XGYFANCL-HS-JG-E24(E27/Rod/Ceiling)

Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Bulb: Φ105*160 Fan: Φ480*160	12/12W	75lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
PP+ABS+ Nylon/ALU	IR Remote/CCT/Brightness Fan 3 Step/Timer	24	50*33.5*45.5



XGYFANCL-HS-HL-E35(E27/Rod/Ceiling)

Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Bulb: Φ125*180 Fan: Φ520*180	20/15W	75lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
PP+ABS+ Nylon/ALU	IR Remote/CCT/Brightness Fan 3 Step/Timer	24	52.5*42.5*44.5



XGYFANCL-YYZ-FY05-E30(E27/E26/B22)

Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Bulb: Φ200*200 Fan: Φ400*200	20/10W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CCT/Brightness Fan 3 Step/Timer	12	62.5*42*40.5



Dimension 尺寸(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Bulb: Φ125*200 Fan: Φ460*200	20/18W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CCT/Brightness Fan 4 Step/Timer	12	47.5*42.5*58



Dimension 外形(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Bulb: Φ125*200 Fan: Φ520*200	20/20W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CCT/Brightness Fan 4 Step/Timer	12	47.5*42.5*58



Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Bulb: Φ125*200 Fan: Φ700*200	25/25W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CCT/Brightness Fan 4 Step/Timer	6	47.5*42.5*39



Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Collapse: Ø170*240 Extend: Ø290*172	40/10W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CCT/Brightness Fan 3 Step/Timer	40	62.5*50*36.6



Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Bulb: Ø125*200 Fan: Ø520*200	20/20W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CCT/Brightness Fan 4 Step/Timer	12	47.5*42.5*58



Dimension DxH (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Bulb: Φ125*200 Fan: Φ720*200	20/25W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CC1/Brightness Fan 4 Step/Timer	6	47.5*42.5*39



Dimension DxHx(W)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Bulb: Φ125*200 Fan: Φ515*200	20/15W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CCT/Brightness Fan 4 Step/Timer	12	47.5*42.5*58



Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Collapse: Ø200*230 Extend: Ø350*150	30/10W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装桶数量	CTN MEAS. 装桶尺寸
ABS	IR Remote/CCT/Brightness Fan 3 Step/Timer	30	60*37*44



Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Collapse: Ø240*230 Extend: Ø410*150	30/10W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/ CCT/Brightness Fan 3 Step/Timer	30	60*37*50



Dimension DxH(mm)	Rated Power 額定功率	Lumen Efficacy 光效	Color Temp. 色溫
Collapse: Ø240*230 Extend: Ø410*150	40/10W	80lm/W	3000K-6500K
Body Material 材質	Functions 功能	PCS/CTN 裝箱數量	CTN MEAS. 裝箱尺寸
ABS	IR Remote/CTT/Brightness Fan 3 Step/Timer	30	60*37*50



Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Collapse: Ø275*350 Extend: Ø430*190	50/15W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CCT/Brightness Fan 3 Step/Timer	18	44.5*44.5*57



Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Collapse: Ø240*350 Extend: Ø400*180	60/15W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CCT/Brightness Fan 3 Step/Timer	18	65*35*56



Dimension ØXH (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Collapse: Ø200*230 Extend: Ø350*150	40/10W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CCT/Brightness Fan 3 Step/Timer	30	60*37*44



Dimension ØxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Collapse: Ø275*350 Extend: Ø380*200	50/15W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CTT/Brightness Fan 3 Step/Timer	18	44.5*44.5*57



Dimension DxH (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Collapse: Ø240*350 Extend: Ø400*180	60/15W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CCT/Brightness Fan 3 Step/Timer	18	65*35*56



Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温
Collapse: Ø250*350 Extend: Ø500*180	70/15W	80lm/W	3000K-6500K
Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
ABS	IR Remote/CCT/Brightness Fan 3 Step/Timer	9	65*35*56

LED Panels & Downlight



LED Backlit - Standard & Ultra Slim



01

LED Panels & Downlight



LED Side Emission




02



Standard | Ultra Slim

Opt.1: Sensor



Opt.2: IP65



Opt.3: 3CCT



Opt.4: 3CCT & 3POWER




CB CE ErP



Model No. 产品规格	Dimension WxLxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Frame Color 外框颜色	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYPL-BE-6060-E40	595*595*30	24-60W (Isolated)	80-180 lm/W	3000K-6500K	White	6	61.5*21.5*64
XGYPL-BEUS-6060-E40	595*595*27						
XGYPL-BE-30120-E40	295*1195*30	24-60W (Isolated)	80-180 lm/W	3000K-6500K	White	6	125*22.5*34
XGYPL-BEUS-30120-E40	295*1195*27						
XGYPL-BE-60120-E60	595*1195*30	24-60W (Isolated)	80-180 lm/W	3000K-6500K	White	6	125*22.5*61
XGYPL-BEUS-60120-E60	595*1195*27						

Lumen Efficacy is Customizable

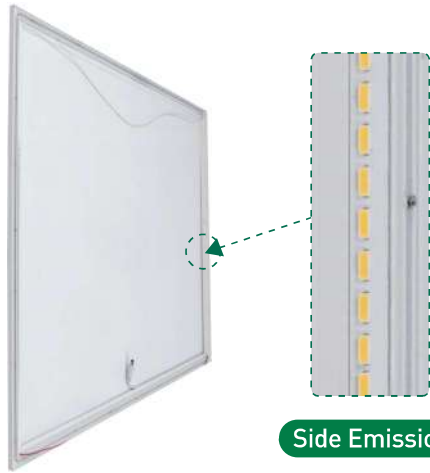

Side Emission



CB CE ErP



Model No. 产品规格	Dimension WxLxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Frame Color 外框颜色	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYPL-SE-6060-E40	595*595*9	24-60W (Isolated)	80-160 lm/W	3000K-6500K	White	5	63.5*17.5*67
XGYPL-SE-6262-E40	620*620*9	24-60W (Isolated)	80-160 lm/W	3000K-6500K	White	5	63.5*17.5*67
XGYPL-SE-30120-E40	295*1195*9	24-60W (Isolated)	80-160 lm/W	3000K-6500K	White	5	123.5*17.5*37
XGYPL-SE-60120-E60	595*1195*9	50-72W (Isolated)	80-160 lm/W	3000K-6500K	White	5	123.5*17.5*67


Lumen Efficacy is Customizable

LED Panels & Downlight


LED Frame Panel Light



03

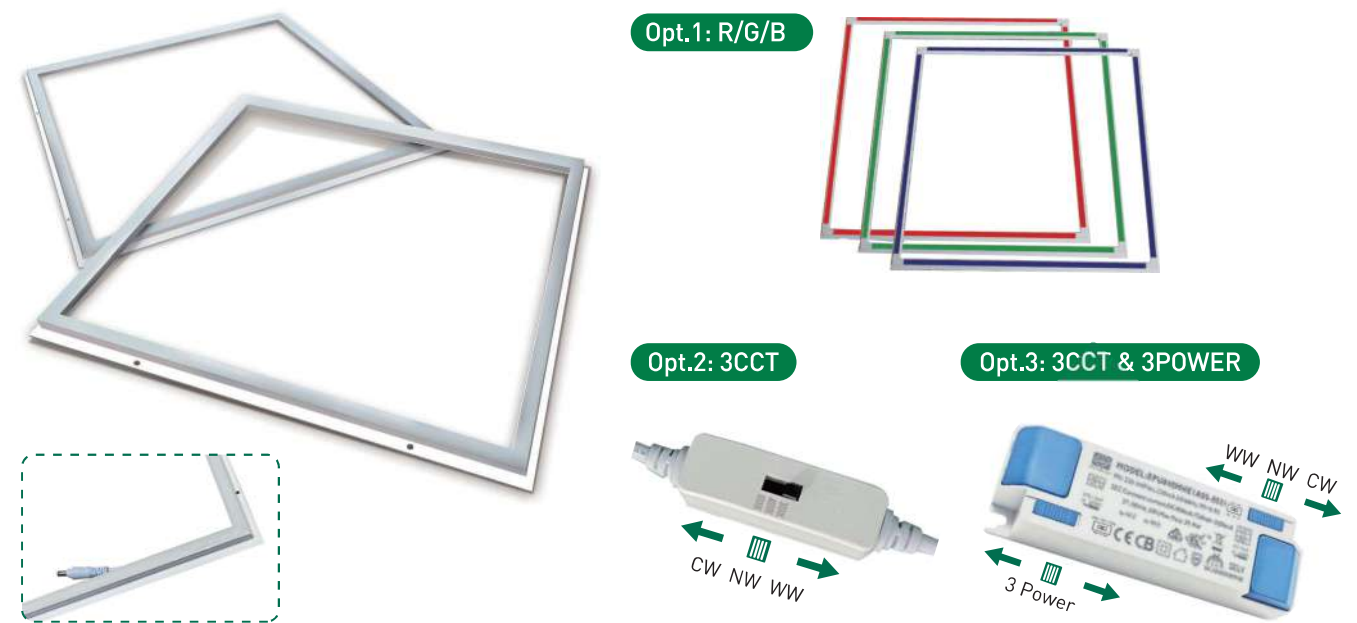

CB CE ErP



Model No. 产品规格	Dimension WxLxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Frame Color 外框颜色	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFPL-6060-E40	591*591*11 601*601*11 614*614*11	40-60W (Isolated)	80-160 lm/W	3000K-6500K (RGB)	White	10	63*33.5*63.5

Lumen Efficacy is Customizable

LED Panels & Downlight


LED Backlit Panel - UGR<16



04



CB CE ErP



Model No. 产品规格	Dimension WxLxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Frame Color 外框颜色	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYPL-BE-6060-E40	595*595*32	24-60W (Isolated)	80-150 lm/W	3000K-6500K	White	6	61.5*21.5*64
XGYPL-BE-30120-E40	295*1195*32	24-60W (Isolated)	80-150 lm/W	3000K-6500K	White	6	125*22.5*34
XGYPL-BE-60120-E60	595*1195*32	50-60W (Isolated)	80-150 lm/W	3000K-6500K	White	6	125*22.5*61

Lumen Efficacy is Customizable

LED Panels & Downlight



LED Backlit Grid Panel - UGR<13



05



CB CE ErP



No Flicker



Ra80/90



50000h



S:220V-240V
U:100V-240V



For Indoor



60°



0.5/0.9



UGR<13

Model No. 产品规格	Dimension WxLxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Frame Color 外框颜色	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYPL-BG-6060-E40	595*595*30	18-32W [Isolated]	80-180 lm/W	3000K-6500K	White	6	61.5*21.5*64
XGYPL-BG-30120-E40	295*1195*30	18-32W [Isolated]	80-180 lm/W	3000K-6500K	White	6	125*22.5*34


Lumen Efficacy is Customizable

Installation









Surface Mounting Frame A		
Panel Size	Frame size	Connection type
295*295*32mm	300*300*65mm	Snap-on/Screw
295*595*32mm	300*600*65mm	Snap-on/Screw
595*595*32mm	600*600*65mm	Snap-on/Screw
295*1195*32mm	300*1200*65mm	Snap-on/Screw
595*1195*32mm	600*1200*65mm	Snap-on/Screw
620*620*32mm	625*625*65mm	Snap-on/Screw

- Distinguished from integral frame, assemblable with parts
- Suitable for integral solid ceiling installation
- Small packaging size, easy transportation, saving freight cost

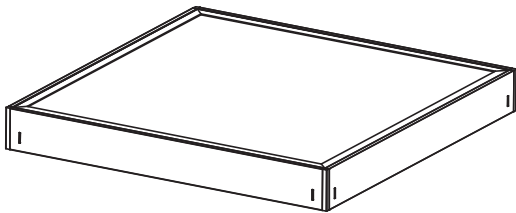

06

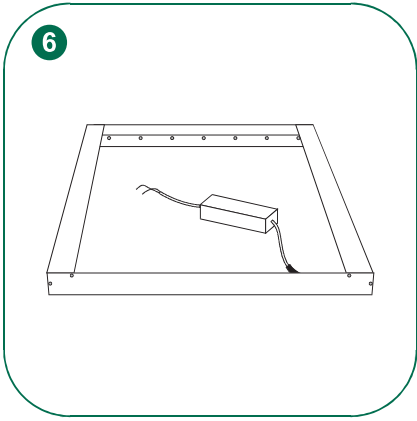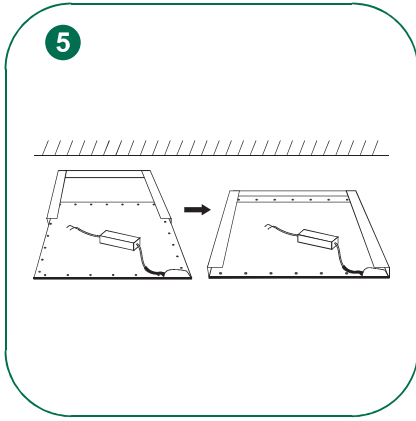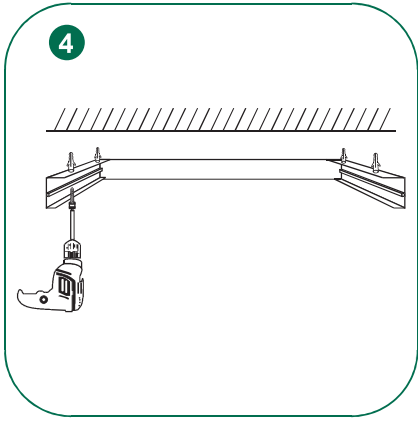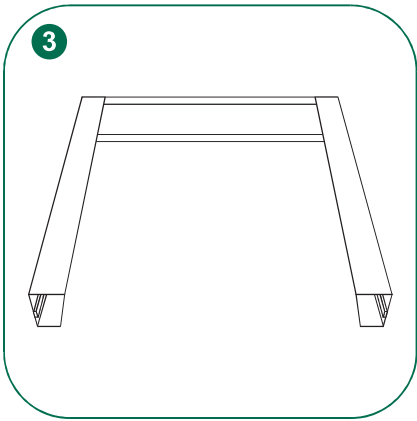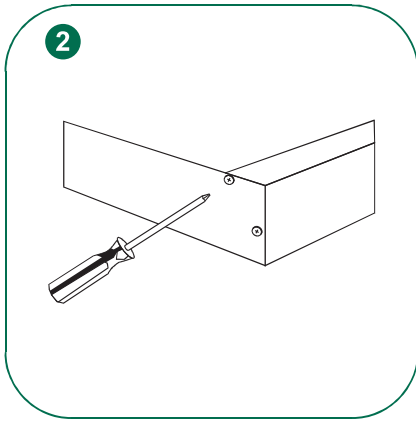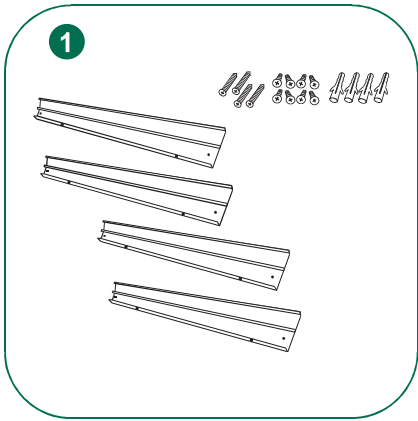

Installation









Surface Mounting Frame B

Panel Size	Frame size	Connection type
295*295*9mm	300*300*43mm	Snap-on
295*595*9mm	300*600*43mm	Snap-on
595*595*9mm	600*600*43mm	Snap-on
295*1195*9mm	300*1200*43mm	Snap-on
595*1195*9mm	600*1200*43mm	Snap-on
620*620*9mm	625*625*43mm	Snap-on

07


- Distinguished from integral frame, assemblable with parts
- Easier installation, clean appearance, no screw can be seen
- Small packaging size, easy transportation, saving freight cost

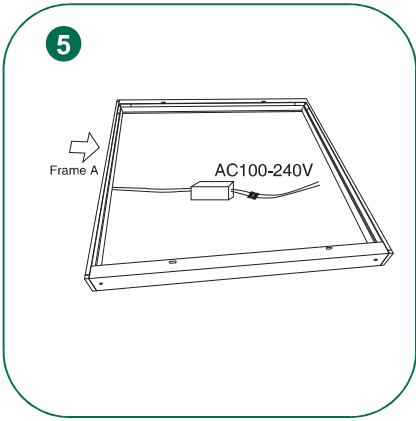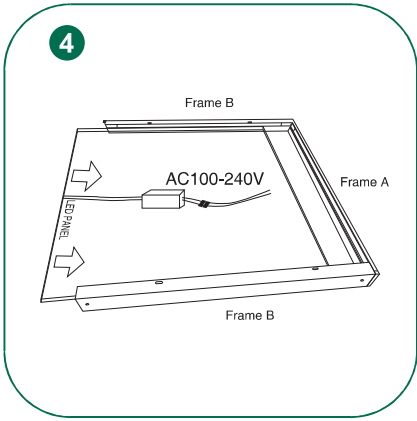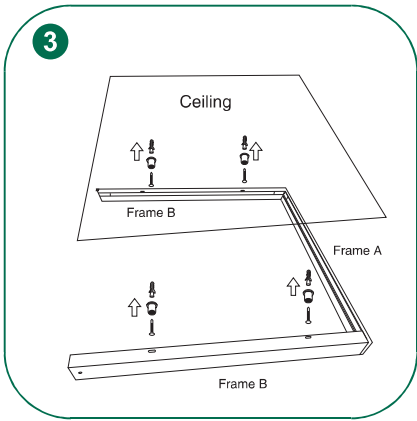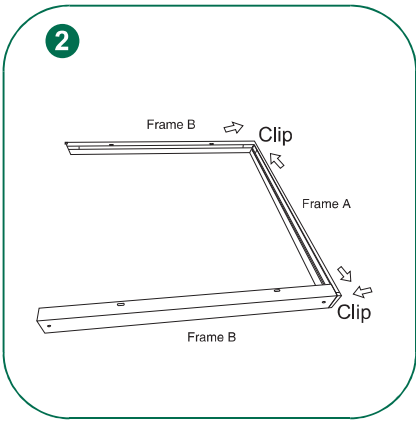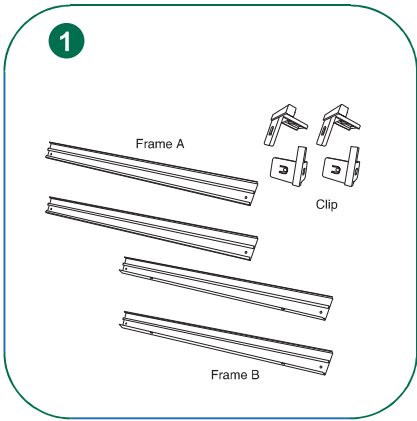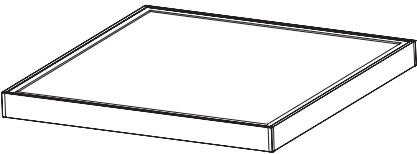


Installation




Suspension Wire (Y-shaped)

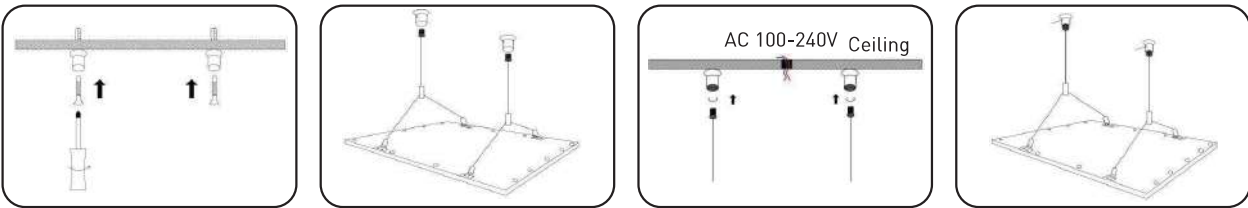

Suspension Wire (I-shaped)

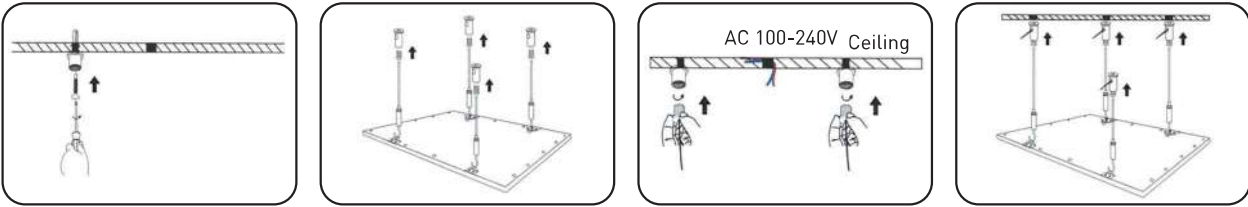

Spring clips

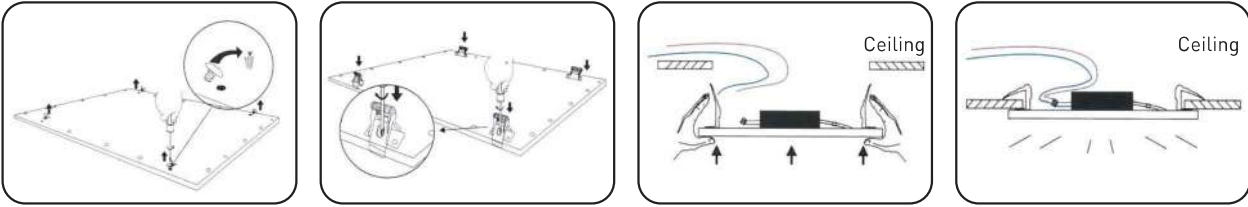

Accessories



Suspension Wire (Y-shaped)
2pcs/set 3pcs/set
main cable: 0.8m
branch cable: 0.8m(0.4m each side)



Suspension Wire (I-shaped)
4pcs/set 6pcs/set
main cable: 1m



Spring clips
L49.4*W30*H19mm



Connection box
L73*W27*H30mm
2pin



Connection box
L76*W39.25*H22.5mm
3pin



GST-18 plug



Euro plug



SAA plug



South African plug

08


LED Panels & Downlight

LED Small Panel DOB Backlit (Full Plastic)

新光源
NEW LIGHTS



Features

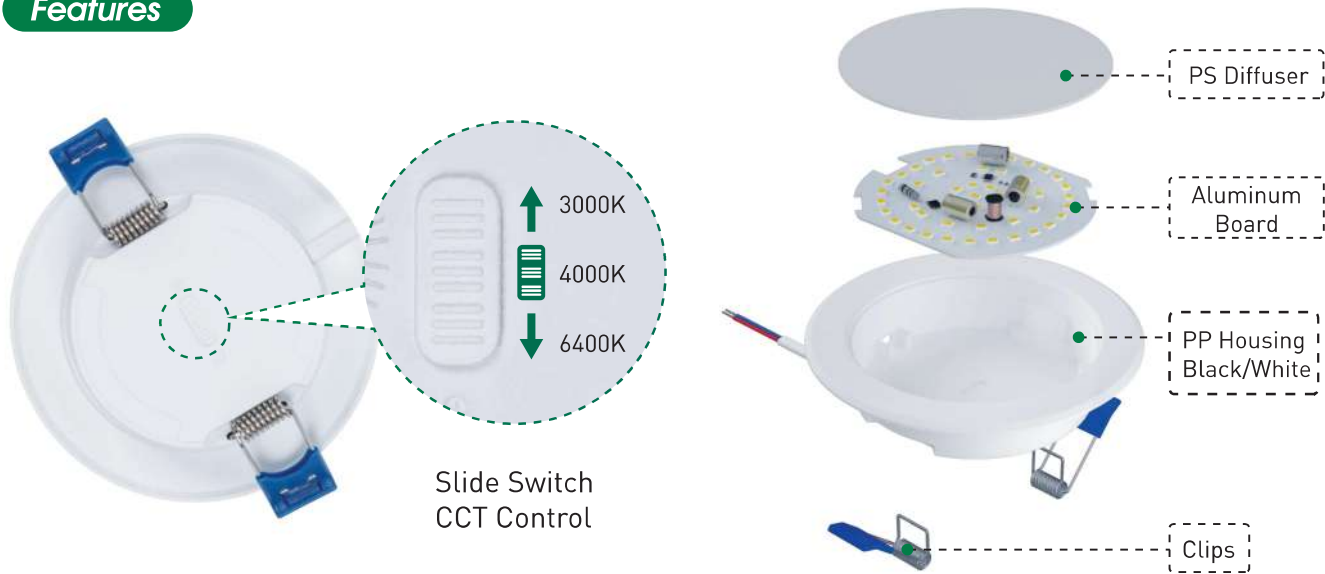

CB CE ErP 



No Flicker



Ra80



25000h



S:220V-240V
U:85-265V



For Indoor



120°



0.5



Recessed Mounting

Suspended Mounting

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSPLRR-PPDOB-E3/6 (DCCT)	Φ93*26.5	3/6W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	Φ70-75	60	31.5*31*22
XGYSPLRR-PPDOB-E9/12 (DCCT)	Φ121*26.5	9/12W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	Φ95-100	40	31.5*26.7*27.7
XGYSPLRR-PPDOB-E15 (DCCT)	Φ154*26.5	15W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	Φ125-135	40	33.5*31.5*34
XGYSPLRR-PPDOB-E18 (DCCT)	Φ177*26.5	18W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	Φ145-150	20	31.5*37.7*20.6
XGYSPLRR-PPDOB-E24 (DCCT)	Φ225*26.5	24W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	Φ190-195	20	46.7*31.5*25.1
XGYSPLRS-PPDOB-E3/6 (DCCT)	93*93*26.5	3/6W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	75*75	60	37.5*36.5*22
XGYSPLRS-PPDOB-E9/12 (DCCT)	122*122*26.5	9/12W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	100*100	40	36.5*31*27.8
XGYSPLRS-PPDOB-E15 (DCCT)	155*155*26.5	15W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	125*125	40	37.5*36.5*34.5
XGYSPLRS-PPDOB-E18 (DCCT)	170*170*26.5	18W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	140*140	20	40.5*36.5*19.5
XGYSPLRS-PPDOB-E24 (DCCT)	220*220*26.5	24W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	190*190	20	51.5*36.5*24.5

Slide Switch 3 CCT & Surface Mounting Frame are Optional / CTN MEAS are Based on Recess Models

LED Panels & Downlight



LED Small Panel External Driver (Full Plastic)



Installation:
Recessed & Suspended



IP54
Protection Level



3 Color in 1 Lamp
Choose By DIP Switch

CB CE ErP



No Flicker



Ra80/90



25000h



170-265V



For Indoor



120°



0.5

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSPLRR-PC-E5 (DCCT)	Φ95*26	5W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ75-90	100	51*36*21.5
XGYSPLRR-PC-E9 (DCCT)	Φ120*26	9W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ90-110	100	62*36*26
XGYSPLRR-PC-E12 (DCCT)	Φ45*26	12W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ120-135	60	46*36*31.5
XGYSPLRR-PC-E18 (DCCT)	Φ170*26	18W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ140-160	60	53*38*36
XGYSPLRR-PC-E24 (DCCT)	Φ220*26	24W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ190-210	40	46*38*46
XGYSPLRS-PC-E5 (DCCT)	95*95*26	5W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ75-90	100	51*36*21.5
XGYSPLRS-PC-E9 (DCCT)	120*120*26	9W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ90-110	100	62*36*26
XGYSPLRS-PC-E12 (DCCT)	145*145*26	12W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ120-135	60	46*36*31.5
XGYSPLRS-PC-E18 (DCCT)	170*170*26	18W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ140-160	60	53*38*36
XGYSPLRS-PC-E24 (DCCT)	220*220*26	24W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ190-210	40	46*38*46

LED Panels & Downlight



LED Small Panel (Aluminum)



IP20
Protection Level



Recessed Mounting

Suspended Mounting

CB CE ErP



No Flicker



Ra80



25000h



U:100V-240V
S:185-265V



For Indoor



120°



0.5

Model No. 产品规格	Dimension DxH / LxWxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Body Material 材质	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSPLRR-ALU-E12 XGYSPLRS-ALU-E12	Φ160*27 168*168*26	12W	65lm/W	3000K-6500K	PP+Iron	Φ150 150x150	50	54.6*21*36.9
XGYSPLRR-ALU-E18 XGYSPLRS-ALU-E18	Φ220*26 218*218*22	18W	65lm/W	3000K-6500K	PP+Iron	Φ200 200x200	30	70*21*47
XGYSPLRR-ALU-E24 XGYSPLRS-ALU-E24	Φ292*22 292*292*22	24W	65lm/W	3000K-6500K	PP+Iron	Φ285 285x285	20	61.2*21*61.2
XGYSPLSR-ALU-E12 XGYSPLSS-ALU-E12	Φ162*25 162*162*25	12W	65lm/W	3000K-6500K	PP+Iron	-	50	50.5*15.5*34.3
XGYSPLSR-ALU-E18 XGYSPLSS-ALU-E18	Φ210*25 210*210*25	18W	65lm/W	3000K-6500K	PP+Iron	-	30	65*15.5*43.9
XGYSPLSR-ALU-E24 XGYSPLSS-ALU-E24	Φ286*25 286*286*25	24W	65lm/W	3000K-6500K	PP+Iron	-	20	59*29*30

LED Panels & Downlight



LED Downlight of Different Beam Angle (Full Plastic)



13



Installation
Recessed



IP44
Protection Level

3000K

4000K

6500K



D60



D75



D90



No Flicker



0~100%



Ra80



25000h



5:220V-240V



For Indoor



0.5



UGR<19

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen 流明	Color Temp. 色温	Beam Angle 光束角度	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-D60-E8-CCT	Φ104*97	8W	720 lm	3000/4000/6500K	60°	Φ90	30	42.5*28.5*55
XGYDL-D75-E9-CCT	Φ112*70	9W	820 lm	3000/4000/6500K	75°	Φ90	30	42.5*28.5*40.5
XGYDL-D90-E9-CCT	Φ115*60	9W	820 lm	3000/4000/6500K	90°	Φ90	40	50*33.6*26.5

LED Panels & Downlight



LED Anti-Glare Downlight (Full Plastic)



14



Installation
Recessed



IP20
Protection Level

3000K

4000K

6500K



AG60RR3.5 White



AG60RR3.5 Black



AG60RR4.5 White



AG60RR4.5 Black



No Flicker



Non
Dimming



Ra80



25000h



U:100V-240V
(DOB)



For Indoor



03



0.5



UGR<19

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Beam Angle 光束角度	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-AG60RR3.5-E8-SS3CCT[Recessed]	Φ106 95*50	8W	60 lm/W	3000/4000/6500K	60°	DP PS Body PP	30	34*31*24.5
XGYDL-AG60RR4.5-E12-SS3CCT[Recessed]	Φ131 110*52	12W	60 lm/W	3000/4000/6500K	60°	DP PS Body PP	30	41.5*31*29.5

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)



15

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)



16



ITFT01-A



ITFT01-B



ITFT01-C

CB CE



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-ITFT01-E10	Φ90*30.5	10W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ75	100	54.5*42*27
XGYDL-ITFT01-E15	Φ120*33	15W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ95	80	54*47*32
XGYDL-ITFT01-E20	Φ140*35	20W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ120	60	47*47*35
XGYDL-ITFT01-E25	Φ170*39	25W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ145	30	56*27*41
XGYDL-ITFT01-E30/40	Φ220*44	30W/40W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ195	20	48*29.5*48



ITFT02-A



ITFT02-B



ITFT02-C



ITFT02-D

CB CE



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-ITFT02-E10	Φ90*46.1	10W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ70	80	42*38.5*42
XGYDL-ITFT02-E15	Φ120*46.5	15W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ90	40	54*28*38.5
XGYDL-ITFT02-E20/25	Φ170*56	20W/25W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ140	30	56*38*43.5
XGYDL-ITFT02-E30/40	Φ220*62.5	30W/40W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ200	20	48*47*48

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)



17



ITFT05A

ITFT05A

CB CE



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 流明	Color Temp. 色温	Material 材质	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-ITFT05A-E7	Φ88.5*42	7W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ75	50	52*22*37
XGYDL-ITFT05A-E10	Φ120*43	10W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ95	50	67*28*36
XGYDL-ITFT05A-E15	Φ170*43	15W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ145	50	67*28*36
XGYDL-ITFT05A-E20	Φ195*44	20W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ170	20	43*30*43
XGYDL-ITFT05A-E30/40	Φ225*45	30W/40W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ205	20	47.5*30*47.5
XGYDL-ITFT05A-E50/60	Φ225*51.5	50W/60W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ205	20	47.5*30*47.5

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)



18



ITFT18-1-White

ITFT18-1-Black

ITFT18-2

CB CE



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-ITFT18-E8	Φ90*45	8W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ75	100	54.5*42*27
XGY-ITFT18-E15	Φ125*45	15W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ95	80	54*47*32
XGY-ITFT18-E24	Φ170*49.5	24W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ145	30	56*27*41
XGY-ITFT18-E30	Φ220*56	30W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ200	20	48*29.5*48

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)



19

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)



20



LY601



LY601



LY601

CB CE



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDW-LY601-E7	Φ63*60	7W	80 lm/W	4CCT 3000/4000K/6500K/IC	Diecasting Aluminum	Φ50	60	35*26*34
XGYDW-LY601-E12	Φ83*80	12W	80 lm/W	4CCT 3000/4000K/6500K/IC	Diecasting Aluminum	Φ75	40	42*25*45
XGYDW-LY601-E18	Φ95*93	18W	80 lm/W	4CCT 3000/4000K/6500K/IC	Diecasting Aluminum	Φ80	40	46*50*32



ITFT01M-A



ITFT01M-B



ITFT01M-C

CB CE



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-ITFT01M-E10	Φ70*60	10W	80 lm/W	3000-6500K	Diecasting Aluminum	60	39.5*26*34
XGYDL-ITFT01M-E15	Φ85*70	15W	80 lm/W	3000-6500K	Diecasting Aluminum	40	42*21*40
XGYDL-ITFT01M-E20	Φ105*70	20W	80 lm/W	3000-6500K	Diecasting Aluminum	40	48*44.5*25
XGYDL-ITFT01M-E30	Φ135*80	30W	80 lm/W	3000-6500K	Diecasting Aluminum	20	31*47*31

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)



21



ITFT09-White



ITFT09-Black

CB CE



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-ITFT09-E7	Φ58*68	7W	80 lm/W	3000-6500K	Aluminum	60	38*28*36
XGYDL-ITFT09-E10	Φ72*75	10W	80 lm/W	3000-6500K	Aluminum	60	41*30*38
XGYDL-ITFT09-E15	Φ83*86	15W	80 lm/W	3000-6500K	Aluminum	40	42*35*40
XGYDL-ITFT09-E20	Φ109*92	20W	80 lm/W	3000-6500K	Aluminum	40	60*58*35
XGYDL-ITFT09-E25	Φ131*102	25W	80 lm/W	3000-6500K	Aluminum	20	30*55*38
XGYDL-ITFT09-E30	Φ159*141	30W	80 lm/W	3000-6500K	Aluminum	20	38*60*38
XGYDL-ITFT09-E40/50	Φ187*127	40W/50W	80 lm/W	3000-6500K	Aluminum	20	52*58*42

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)



22



ITFT10-White



ITFT10-Black

CB CE



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-ITFT10-E10	Φ75*100	10W	80 lm/W	3000-6500K	Aluminum	60	45*40*46
XGYDL-ITFT10-E20	Φ100*120	20W	80 lm/W	3000-6500K	Aluminum	40	46*33*52
XGYDL-ITFT10-E30	Φ120*150	30W	80 lm/W	3000-6500K	Aluminum	40	54*62*42
XGYDL-ITFT10-E40	Φ150*180	40W	80 lm/W	3000-6500K	Aluminum	20	42*68*53

LED Panels & Downlight

LED GU10 Module

 新光源
NEW LIGHTS



CB CE ErP 

 No Flicker

 Dimmable Option

 Ra80

 25000h

 S:220V-240V (LC DOB)

 For Indoor

 60°

 >0.7/0.5

Features :

- ✗ Emiss. Direction: Back Emission[Recessed]
- ✗ Compatible With: GU10 Fixture/ Ring
- ✗ Body Color: White
- ✗ Body Of PA / Lens Of PC



FRONT IP44
BACK IP20
PROTECTION
LEVEL OF FRONT



Single CCT



3 CCT & Dimmable

Model No. 产品规格	Dimension DxH(mm)	LENS 透镜	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYGU10M60-E6 [SS3CCT]	Φ50*25	60°	6W	90lm/w	3000K-6500K (3000/4000/6500K)	100	42.5*29.5*13.5
XGYGU10M60-E7	Φ50*30	38°	7W	90lm/w	3000K	100	42.5*29.5*14

LED Panels & Downlight

GU10 / GU10 Module Fixtures & Rings

 新光源
NEW LIGHTS



CB CE ErP 





○ White ● Black ● Golden ● Silver ● Brushed



Model No. 产品规格	Dimension DxH(mm)	Material 材质
XGYGU10FR-L025	Φ82*24 / 70	Aluminum Painted Electroplated
XGYGU10FR-L004	Φ90*28 / 65	Iron Painted Electroplated
XGYGU10FR-L015	Φ90*22 / 75	Iron Painted Electroplated
XGYGU10FR-L006	Φ95*28 / 65	Iron Painted Electroplated
XGYGU10FR-L007	Φ88*24 / 70 Φ90*28 / 70	Iron Painted Electroplated
XGYGU10FR-L014	Φ120*25 / 80	Iron Painted Electroplated

 XGYGU10FR-L035 Dimension D*H / C (mm) Φ82*24 / 70 Material 材质 Aluminum Painted Electroplated	 XGYGU10FR-L032 Dimension D*H / C (mm) Φ94*30 / 80 Material 材质 Aluminum Painted Electroplated	 XGYGU10FR-L030 Dimension D*H / C (mm) Φ85*22 / 70 Material 材质 Aluminum Painted Electroplated	 XGYGU10FR-L044 Dimension D*H / C (mm) Φ82*24 / 70 Material 材质 Aluminum Painted Electroplated	 XGYGU10FR-L040 Dimension D*H / C (mm) Φ83*24 / 75 Material 材质 Zinc Painted Electroplated	 XGYGU10FR-L016 Dimension D*H / C (mm) Φ88*24 / 65 Material 材质 Iron Painted Electroplated
 XGYGU10FR-L028 Dimension D*H / C (mm) Φ55*25 / 45 Material 材质 Zinc Painted Electroplated	 XGYGU10FR-L008 Dimension D*H / C (mm) Φ97*25 / 80 Material 材质 Iron Painted Electroplated	 XGYGU10FR-L011 Dimension D*H / C (mm) Φ105*46 / 80 Material 材质 Iron Painted Electroplated	 XGYGU10FR-L012 Dimension D*H / C (mm) Φ105*25 / 80 Material 材质 Iron Painted Electroplated	 XGYGU10FR-L041 Dimension D*H / C (mm) Φ83*24 / 75 Material 材质 Zinc Painted Electroplated	 XGYGU10FR-L018 Dimension D*H / C (mm) Φ83*24 / 75 Material 材质 Iron Painted Electroplated
 XGYGU10FR-DLPR-201-WH Dimension D*H / C (mm) Φ95*35 / 75 Material 材质 ABS	 XGYGU10FR-DLPS-201 Dimension W*H*T / C (mm) 90*90*35 / 75 Material 材质 ABS	 XGYGU10FR-DLPR-301 Dimension D*H / C (mm) Φ81*36 / 75 Material 材质 ABS	 XGYGU10FR-DLPS-301 Dimension W*H*T / C (mm) 81*81*36 / 75 Material 材质 ABS	 XGYGU10FR-DL200 Dimension D*H / C (mm) Φ81*30 / 55 Φ81*36 / 75 Material 材质 Iron Painted	 XGYGU10FR-DL201 Dimension D*H / C (mm) Φ92*27 / 70 Material 材质 Iron Painted
 XGYGU10FR-L001 Dimension D*H / C (mm) Φ80*32 / 55 Material 材质 Iron Painted Electroplated	 XGYGU10FR-L013 Dimension D*H / C (mm) Φ84*30 / 60 Material 材质 Iron Painted Electroplated	 XGYGU10FR-L027 Dimension D*H / C (mm) Φ86*26 / 60 Material 材质 Zinc Painted Electroplated	 XGYGU10FR-L009 Dimension W*H*T / C (mm) 88*88*32 / 60 Material 材质 Iron Painted Electroplated	 XGYGU10FR-L039 Dimension W*H*T / C (mm) 77*77*25 / 60 Material 材质 Zinc Painted Electroplated	 XGYGU10FR-L037 Dimension W*H*T / C (mm) 90*90*30 / 75 Material 材质 Aluminum Painted Electroplated
 XGYGU10FR-L042 Dimension D*H / C (mm) Φ87*30 / 70 Material 材质 Aluminum Painted Electroplated	 XGYGU10FR-L033 Dimension D*H / C (mm) Φ78*24 / 60 Material 材质 Aluminum Painted Electroplated	 XGYGU10FR-L020 Dimension D*H / C (mm) Φ95*40 / 80 Material 材质 Iron Painted Plastic	 XGYGU10FR-L021 Dimension D*H / C (mm) Φ90*25 / 80 Material 材质 Plastic	 XGYGU10FR-L036 Dimension D*H / C (mm) Φ82*30 / 75 Material 材质 Aluminum Painted Electroplated	 XGYGU10FR-L019 Dimension W*H*T / C (mm) 88*88*40 / 80 Material 材质 Iron Painted Plastic

 XGYGU10FR-L010 Dimension D*H / C (mm) 87*87*27 / 70 Material 材质 Iron Painted Electroplated	 XGYGU10FR-L038 Dimension D*H / C (mm) 83*83*25 / 70 Material 材质 Zinc Painted Electroplated	 XGYGU10FR-L026 Dimension W*H*T / C (mm) 90*90*24 / 75 Material 材质 Aluminum Painted Electroplated	 XGYGU10FR-L029 Dimension W*H*T / C (mm) 55*55*25 / 45 Material 材质 Zinc Painted Electroplated	 XGYGU10FR-L034 Dimension W*H / C (mm) 90*90*24 / 70 Material 材质 Aluminum Painted Electroplated	 XGYGU10FR-L031 Dimension W*H / C (mm) 94*94*30 / 80 Material 材质 Aluminum Painted Electroplated
 XGYJLK-LCG1230-1 Dimension W*H*T (mm) 182*182*46 Material 材质 Steel	 XGYJLK-LCG1230-2 Dimension W*H*T (mm) 332*182*46 Material 材质 Steel	 XGYJLK-LCG1230-3 Dimension W*H*T (mm) 482*182*46 Material 材质 Steel	 XGYJLK-LCG0130-1 Dimension W*H (mm) 178*178 Material 材质 Steel	 XGYJLK-LCG0130-2 Dimension W*H (mm) 325*178 Material 材质 Steel	 XGYJLK-LCG0130-3 Dimension W*H (mm) 475*178 Material 材质 Steel
 XGYJLK-LCG1130-1 Dimension W*H*T (mm) 185*185*150 Material 材质 Steel	 XGYJLK-LCG1130-2 Dimension W*H*T (mm) 335*185*150 Material 材质 Steel	 XGYJLK-LCG1130-3 Dimension W*H*T (mm) 485*185*150 Material 材质 Steel	 XGYJLK-LCG1130-4 Dimension W*H*T (mm) 335*335*150 Material 材质 Steel	 XGYGU10FR-L043 Dimension D*H / C (mm) Φ87*30 / 70 Material 材质 Aluminum Painted Electroplated	 XGYGU10FR-L017 Dimension D*H / C (mm) Φ85*35 / 60 Material 材质 Iron Painted Electroplated
 XGYJLK-LCG1120-1 Dimension W*H*T (mm) 134*134*106 Material 材质 Steel	 XGYJLK-LCG1120-2 Dimension W*H*T (mm) 226*134*106 Material 材质 Steel	 XGYJLK-LCG1120-3 Dimension W*H*T (mm) 320*134*106 Material 材质 Steel	 XGYJLK-LCG1120-4 Dimension W*H*T (mm) 225*225*106 Material 材质 Steel	 XGYGU10FR-L024 Dimension W*H / C (mm) 83*83*35 / 75 Material 材质 Aluminum Painted Electroplated	 XGYGU10FR-L023 Dimension D*H / C (mm) Φ83*35 / 75 Material 材质 Aluminum Painted Electroplated
 XGYJLK-CS26 Dimension D*H (mm) Ø100*37 Material 材质 Steel/Aluminum Plastic	 XGYJLK-CS27-1 Dimension W*H*T (mm) 100*100*37 Material 材质 Steel/Aluminum Plastic	 XGYJLK-CS27-2 Dimension W*H*T (mm) 185*100*37 Material 材质 Steel/Aluminum Plastic	 XGYJLK-CS27-3 Dimension W*H*T (mm) 270*100*37 Material 材质 Steel/Aluminum Plastic	 XGYGU10FR-L047 Dimension D*H / C (mm) Φ163*160 / 140 Material 材质 Iron Painted Electroplated	 XGYGU10FR-L048 Dimension D*H / C (mm) Φ188*190 / 160 Material 材质 Iron Painted Electroplated

LED Spot Light

Plastic Housing Integrated LED



CB CE ErP 



No Flicker



Dimmable Option



Ra80



25000h



220-240V



For Indoor



40°



IP20



0.5



GCTL



TAL



WAL



PCL

Model No. 产品规格	Dimension (L*W)/LxH(mm)	Rated Power 额定功率	Lumen 流明	Color Temp. 色温	Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSL-GCTL-E3.5-T3CCT	78*53*376	3.5W	260lm Useful Lumen	3000/4000/6500K	Metal Clamp / PC Lens PC Spot Head Silicone Coated Metal Tube	Short Touch On/Off 3CCT Long Touch Dimming	8	26*19.5*42
XGYSL-TAL-E3.5-T3CCT	130*130*382	3.5W	260lm Useful Lumen	3000/4000/6500K	Metal Base / PC Lens PC Spot Head Silicone Coated Metal Tube	Short Touch On/Off 3CCT Long Touch Dimming	6	36*34.5*52
XGYSL-WAL-E3.5-T3CCT	80*63*446	3.5W	260lm Useful Lumen	3000/4000/6500K	ABS Base / PC Lens PC Spot Head Silicone Coated Metal Tube	Short Touch On/Off 3CCT Long Touch Dimming	12	25*24*38.5
XGYSL-PCL-E3.5-T3CCT	112*426	3.5W	260lm Useful Lumen	3000/4000/6500K	ABS Clamp / PC Lens PC Spot Head Silicone Coated Metal Tube	Short Touch On/Off 3CCT Long Touch Dimming	24	41*36*32.5



Model No. 产品规格	Dimension (L*W)DxH(mm)	Rated Power 额定功率	Lumen 流明	Color Temp. 色温	Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSL-CSL-CB1H-1R	120*80*85	3.5W	400lm Module Lumen	3000K-6500K	Metal Base / PC Lens PC Spot Head	Rotatable Flippable Heads	8	38*28.5*13.6
XGYSL-CSL-CB3H-1R	Φ175*125	3.5Wx3	400lm x3 Module Lumen	3000K-6500K	Metal Base / PC Lens PC Spot Head	Rotatable Flippable Heads	27	57*57*40.5



Model No. 产品规格	Dimension LxWxH(mm)	Rated Power 额定功率	Lumen 流明	Color Temp. 色温	Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSL-CSL-ORB2H-1R	280*61*85	3.5Wx2	400lm x2 Module Lumen	3000K-6500K	Metal Base / PC Lens PC Spot Head	Rotatable Flippable Heads	8	28*27*27



Model No. 产品规格	Dimension LxWxH(mm)	Rated Power 额定功率	Lumen 流明	Color Temp. 色温	Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSL-CSL-ORB3H-1R	430*61*85	3.5Wx3	400lm x3 Module Lumen	3000K-6500K	Metal Base / PC Lens PC Spot Head	Rotatable Flippable Heads	6	42*21*27



Model No. 产品规格	Dimension (L*W)/LxH(mm)	Rated Power 额定功率	Lumen 流明	Color Temp. 色温	Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSL-CSL-ORB4H-1R	580*61*85	3.5Wx4	400lm x4 Module Lumen	3000K-6500K	Metal Base / PC Lens PC Spot Head	Rotatable Flippable Heads	4	59.5*14.5*27



03



Model No. 产品规格	Dimension (L*W)/LxH(mm)	Rated Power 额定功率	Lumen 流明	Color Temp. 色温	Body Material 材质	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSL-HSL-RB6H-1R	800*158*1205	3.5Wx6	400lm x6 Module Lumen	3000K-6500K	Metal Base / PC Lens PC Spot Head	Rotatable Flippable Heads	4	84*20*26.5
XGYSL-FL2H-E3.5x2-T3CCT	220*1415	3.5Wx2	400lm x2 Module Lumen	3000K-6500K	Metal Base / PC Lens PC Spot Head	Rotatable Flippable Heads	2	48*24*15
XGYSL-FL1H-E3.5-T3CCT	210*210*1385	3.5W	260lm Useful Lumen	3000/4000/6500K	Metal Base / PC Lens PC Spot Head Silicone Coated Metal Tube	Short Touch On/Off 3CCT Long Touch Dimming	4	55*23.5*27.5

LED Spot Light

Metal Housing for GU10/MR16



04

CB CE ErP RoHS ENEC FCC



Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CK001R-1R	134*80*110	B/W Steel
XGYCSL-JLK-CK001R-2	244*100*152	B/W Steel
XGYCSL-JLK-CK001R-3	360*100*152	B/W Steel
XGYCSL-JLK-CK001R-3R	205*202*115	B/W Steel
XGYCSL-JLK-CK001R-4	580*100*138	B/W Steel

⊗ Housing Only without Light Source

Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CK002T	83*55*156	B/W Aluminium+Steel
XGYCSL-JLK-CK002R-1	92.5*80*140	B/W Aluminium+Steel
XGYCSL-JLK-CK002S-2	210*60*138	B/W Aluminium+Steel
XGYCSL-JLK-CK002S-3	366*60*138	B/W Aluminium+Steel
XGYCSL-JLK-CK002S-4	210*210*138	B/W Aluminium+Steel
XGYCSL-JLK-CK002S-5	605*60*138	B/W Aluminium+Steel

⊗ Housing Only without Light Source





Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CK003T	83*55*169	B/W Aluminium+Steel+PC
XGYCSL-JLK-CK003R-1	80*80*153	B/W Aluminium+Steel+PC
XGYCSL-JLK-CK003S-1K	130*60*155	B/W Aluminium+Steel+PC
XGYCSL-JLK-CK003S-2	210*60*153	B/W Aluminium+Steel+PC
XGYCSL-JLK-CK003S-3	366*60*153	B/W Aluminium+Steel+PC
XGYCSL-JLK-CK003S-4	485*60*153	B/W Aluminium+Steel+PC
XGYCSL-JLK-CK003S-6	900*60*152	B/W Aluminium+Steel+PC
XGYCSL-JLK-CS114R-2	181*55*98	B/W Aluminium+PC
XGYCSL-JLK-CS109D (Surface Mounting)	100*100*1230	B/W Aluminium+PC

⊠ Housing Only without Light Source

Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CK004T	83*55*171	B/W Aluminium+Steel
XGYCSL-JLK-CK004S-1	92.5*80*155	B/W Aluminium+Steel
XGYCSL-JLK-CK004S-2	210*60*155	B/W Aluminium+Steel
XGYCSL-JLK-CK004S-3	366*60*155	B/W Aluminium+Steel
XGYCSL-JLK-CK004S-4	485*60*155	B/W Aluminium+Steel
XGYCSL-JLK-CK004S-4S	210*210*155	B/W Aluminium+Steel
XGYCSL-JLK-CK004S-6	95*80*155	B/W Aluminium+Steel

⊠ Housing Only without Light Source



Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CK005T	75*59*138	B/W Aluminium+Steel
XGYCSL-JLK-CK005R-1	87*85*116	B/W Aluminium+Steel
XGYCSL-JLK-CK005R-2	244*116*155	B/W Aluminium+Steel
XGYCSL-JLK-CK005R-3	325*116*157	B/W Aluminium+Steel
XGYCSL-JLK-CK005R-4	580*116*147	B/W Aluminium+Steel

⊠ Housing Only without Light Source

Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CK005D-2S	210*60*1100	B/W Aluminium+Steel
XGYCSL-JLK-CK005D-3S	366*60*1100	B/W Aluminium+Steel
XGYCSL-JLK-CK003S-1K	202*202*1107	B/W Aluminium+Steel
XGYCSL-JLK-CK005D-4S	490*60*1100	B/W Aluminium+Steel

⊠ Housing Only without Light Source



Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CK006D-1R	Ø100*1110	B/W Aluminium+Steel
XGYCSL-JLK-CK006D-3S	390*80*1100	B/W Aluminium+Steel
XGYCSL-JLK-CK006R-1	103*80*111	B/W Aluminium+Steel
XGYCSL-JLK-CK006S-2	220*80*115	B/W Aluminium+Steel
XGYCSL-JLK-CK006S-3	380*80*115	B/W Aluminium+Steel
XGYCSL-JLK-CK006S-4	500*80*115	B/W Aluminium+Steel
XGYCSL-JLK-CK006S-4S	210*210*115	B/W Aluminium+Steel

⊠ Housing Only without Light Source

Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CK007T	83*55*163	B/W Aluminium+Steel
XGYCSL-JLK-CK007S-1	93*80*146	B/W Aluminium+Steel
XGYCSL-JLK-CK007S-2	210*60*145	B/W Aluminium+Steel
XGYCSL-JLK-CK007S-3	366*60*145	B/W Aluminium+Steel
XGYCSL-JLK-CK007S-4	485*60*145	B/W Aluminium+Steel
XGYCSL-JLK-CK007S-4S	210*210*145	B/W Aluminium+Steel
XGYCSL-JLK-CK007S-6	900*60*145	B/W Aluminium+Steel

⊠ Housing Only without Light Source



Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CK008R-1	98*80*150	B/W Aluminium+Steel
XGYCSL-JLK-CK008R-2	210*65*147	B/W Aluminium+Steel
XGYCSL-JLK-CK008S-3	366*65*147	B/W Aluminium+Steel
XGYCSL-JLK-CK008S-4	485*65*147	B/W Aluminium+Steel

⊠ Housing Only without Light Source

Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CK026S-1	120*120*136	B/W Aluminium
XGYCSL-JLK-CK026S-2	300*120*136	B/W Aluminium
XGYCSL-JLK-CK026S-3	480*120*136	B/W Aluminium
XGYCSL-JLK-CK026S-4	690*120*136	B/W Aluminium

⊠ Housing Only without Light Source



Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CS51R-1B	95*80*155	B/W Aluminium
XGYCSL-JLK-CS51R-2B	191.5*191.5*160	B/W Aluminium
XGYCSL-JLK-CS51R-3B	205*205*160	B/W Aluminium
XGYCSL-JLK-CS51R-4B	247*247*155	B/W Aluminium
XGYCSL-JLK-CS51S-1B	120*70*155	B/W Aluminium
XGYCSL-JLK-CS51S-2B	220*70*155	B/W Aluminium
XGYCSL-JLK-CS51S-3B	365*70*155	B/W Aluminium
XGYCSL-JLK-CS51S-4B	490*70*155	B/W Aluminium

⊠ Housing Only without Light Source



Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CS74-1	Ø60*183	B/W Aluminium
XGYCSL-JLK-CS74-2	136*60*183	B/W Aluminium
XGYCSL-JLK-CS74-3	213*60*183	B/W Aluminium
XGYCSL-JLK-CS74-4	193*175*183	B/W Aluminium
XGYCSL-JLK-CS74-5	213*213*183	B/W Aluminium

⊠ Housing Only without Light Source



Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CS51F	161*92*73	B/W Aluminium
XGYCSL-JLK-CS51G	161*113*95	B/W Aluminium
XGYCSL-JLK-CS51H	175*70*70	B/W Aluminium
XGYCSL-JLK-CS51R-1A	Ø60*183	B/W Steel

⊠ Housing Only without Light Source



Model No. 产品规格	Dimension (D LxW)xH(mm)	Body Material 材质
XGYCSL-JLK-CK023R-1	100*80*195	B/W Aluminium
XGYCSL-JLK-CK024S-1	100*80*195 with comb	B/W Aluminium
XGYCSL-JLK-CK024R-2	210*60*193 with comb	B/W Aluminium
XGYCSL-JLK-CK024S-3	365*60*193 with comb	B/W Aluminium

⊠ Housing Only without Light Source



LED Table Lamp



- ⊠ Socket1: PD20W TypeC In/Out
- ⊠ Socket2: 10W USB Type A Out

- Charging Cable Type C
- Long Touch Stepless-Dimming
- Short Touch 3 CCT
- Ultra-Sonic Mosquito Repellent

CE FC ErP RoHS PS E

- No Flicker
- Ra80
- 25000h
- 120°
- For Indoor



Pearl Black Pearl Red Pearl Tiffany Pearl White Copper Pearl Rose Gold Pearl

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Color Temp 色温	Brightness 亮度	Body Material 材质	Battery Capacity 电池容量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTL-SGS-PB-E1	Φ130*310	0.6W	3000/4000/6500K	600lux on table @4000K	Metal Rod PC Head/Base	10,000mAh (With PD20W Output Charing)	9	48.2*48.2*36.5


LED Table Lamp



02



- ☒ Touch On/Off
- ☒ Touch 3 CCT
- ☒ Metal & PMMA



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Total Lumen 光通量	Color Temp. 色温	Battery Capacity 电池容量	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTL-HT-TD1W133-E2	Φ100*270	2W	70lm	3000/4000/6500K	1200mAh	Metal & PMMA	30	58*36*63



XGYTL-HT-TD1W132-E2

Rated Power 额定功率	Total Lumen 光通量	Charging Cable 充电线
2W	70lm	Type C
Body Material 材质	Color Temp. 色温	Functions 功能
Metal & PMMA	3000/4000/6500K	Touch On/Off Touch 3 CCT
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ100*255	30	58*36*63



XGYTL-HT-TD1W078-E2

Rated Power 额定功率	Total Lumen 光通量	Charging Cable 充电线
2W	70lm	Type C
Body Material 材质	Color Temp. 色温	Functions 功能
Metal & PMMA	3000/4000/6500K	Touch On/Off Touch 3 CCT
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ150*210	12	50*66*25



XGYTL-HT-TD1W215-E2

Rated Power 额定功率	Total Lumen 光通量	Charging Cable 充电线
2W	70lm	USB
Body Material 材质	Color Temp. 色温	Functions 功能
Metal & PMMA	3000/4000/6500K	Touch On/Off Touch 3 CCT Stepless Dimming
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ150*320	10	82*32*37



XGYTL-TD1W058-E2

Rated Power 额定功率	Total Lumen 光通量	Charging Cable 充电线
2W	70lm	USB
Body Material 材质	Color Temp. 色温	Functions 功能
Metal & PMMA	3000/4000/6500K	Touch On/Off Touch 3 CCT Stepless Dimming
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ150*240	16	62*62*54



XGYTL-HT-TD1W141-E2

Rated Power 额定功率	Total Lumen 光通量	Charging Cable 充电线
2W	70lm	Type C
Body Material 材质	Color Temp. 色温	Functions 功能
Metal & PMMA	3000/4000/6500K	Touch On/Off Touch 3 CCT
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ109*270	30	58*35*52



XGYTL-HT-TD1W126-E2

Rated Power 额定功率	Total Lumen 光通量	Charging Cable 充电线
2W	70lm	Type C
Body Material 材质	Color Temp. 色温	Functions 功能
Metal & PMMA	3000/4000/6500K	Touch On/Off Touch 3 CCT
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ109*240	30	65*40*53



XGYTL-HT-TD1W109

Rated Power 额定功率	Total Lumen 光通量	Charging Cable 充电线
2W	70lm	Type C
Body Material 材质	Color Temp. 色温	Functions 功能
Metal & PMMA	3000-6500K	Touch On/Off Touch 3 CCT
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ90*225	30	58*35*52



XGYTL-HT-TD1W260-E

Rated Power 额定功率	Total Lumen 光通量	Charging Cable 充电线
2W	70lm	USB
Body Material 材质	Color Temp. 色温	Functions 功能
Metal & PMMA	3000/4000/6500K	Touch On/Off Touch 3 CCT
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ150*240	16	62*62*28

03

LED Table Lamp



04



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Total Lumen 光通量	Color Temp 色温	Charging Cable 充电线	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTL-XQ-1822-E2	Φ120*210	2W	110LM	3000/4000/6500K	Type C	Metal+Acrylic	20	69.5*28*67



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Total Lumen 光通量	Color Temp 色温	Charging Cable 充电线	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTL-XQ-1825A-E2	Φ80*240	2W	110LM	3000/4000/6500K	Type C	Metal+Cloth+Acrylic	20	69.5*28*67



XGYTL-XQ-1808-E5		
Rated Power 额定功率	Total Lumen 光通量	Charging Cable 电池容量
5W	130LM	1800mAH
Body Material 材质	Color Temp. 色温	Functions 功能
Metal+Acrylic	3000/4000/6500K	Touch On/Off Touch 3 CCT Stepless Dimming
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ100*380	20	57*27*62



XGYTL-XQ-1809-E3		
Rated Power 额定功率	Total Lumen 光通量	Battery Capacity 电池容量
1.5W	80LM	1800mAH
Body Material 材质	Color Temp. 色温	Functions 功能
Metal+Acrylic	3000/4000/6500K	Touch On/Off Touch 3 CCT Stepless Dimming
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ105*290	25	64.5*64.5*33



XGYTL-XQ-1820-E2		
Rated Power 额定功率	Total Lumen 光通量	Battery Capacity 电池容量
2W	90LM	1200mAH
Body Material 材质	Color Temp. 色温	Functions 功能
Metal+ABS	3000/4000/6500K	Touch On/Off Touch 3 CCT Stepless Dimming
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ120*235	20	67*27*52



XGYTL-XQ-1812E-E2		
Rated Power 额定功率	Total Lumen 光通量	Battery Capacity 电池容量
2W	90LM	1200mAH
Body Material 材质	Color Temp. 色温	Functions 功能
Metal+Acrylic	3000/4000/6500K	Touch On/Off Touch 3 CCT Stepless Dimming
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ120*210	30	67*41*44



XGYTL-XQ-1808SC-E5		
Rated Power 额定功率	Total Lumen 光通量	Charging Cable 电池容量
5W	130LM	1200mAH
Body Material 材质	Color Temp. 色温	Functions 功能
Metal+Acrylic	3000/4000/6500K	Touch On/Off Touch 3 CCT Stepless Dimming Split Housing
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ100*380	30	69.5*32*41



XGYTL-XQ-1821-E3		
Rated Power 额定功率	Total Lumen 光通量	Battery Capacity 电池容量
1.5W	70lm	1800mAH
Body Material 材质	Color Temp. 色温	Functions 功能
Metal+ABS	3000/4000/6500K	Touch On/Off 3 Step Dimming
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ50*360	30	47.5*39.5*40



XGYTL-XQ-18011-E2		
Rated Power 额定功率	Total Lumen 光通量	Battery Capacity 电池容量
2W	120LM	1800mAH
Body Material 材质	Color Temp. 色温	Functions 功能
Metal+Acrylic	3000/4000/6500K	Touch On/Off Touch 3 CCT Stepless Dimming
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ130*285	20	67*27*61



XGYTL-XQ-1831-E2		
Rated Power 额定功率	Total Lumen 光通量	Battery Capacity 电池容量
3W	100LM	1800mAH
Body Material 材质	Color Temp. 色温	Functions 功能
Metal+Cloth	3000/4000/6500K	Touch On/Off Touch 3 CCT Stepless Dimming
Dimension DxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ140*365	18	53*46*47

05

LED Under Cabinet Light



CB CE ErP RoHS



No Flicker



Dimmable Option



Ra80



25000h



S: AC 85-265V



For Indoor



320°



Warm Light
3000K

Natural Light
4000K

White Light
6500K

Features :

- Aluminum Casing / PC Diiffuser / ABS End Caps
- Charging Cable: Type C Cable
- Installation: Magnetic Adhesive Plate x 2
- Functions: M1: 100% Always On
M2: Night&IR Sensor Trigger
M3: SOS Flash Mode



Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Battery Capacity 电池容量	Lumen 流明	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYUCL-ZO-100GYD-CCT-E1	100*18.5*17	0.5W	200mAh	30lm Stepless Dimming	3000K-6500K	154	43*21.5*27.5
XGYUCL-ZO-150GYD-CCT-E1	150*18.5*17	0.5W	280mAh	42lm Stepless Dimming	3000K-6500K	168	52*22*28.5
XGYUCL-ZO-210GYD-CCT-E1	210*18.5*17	1W	350mAh	60lm Stepless Dimming	3000K-6500K	100	33.5*31.5*25
XGYUCL-ZO-297GYD-CCT-E1	297*18.5*17	1W	450mAh	88lm Stepless Dimming	3000K-6500K	100	43*31.5*24
XGYUCL-ZO-500GYD-CCT-E2	500*18.5*17	2W	900mAh	140lm Stepless Dimming	3000K-6500K	80	63.5*25*25.5



Warm Light
3000K

Natural Light
4000K

White Light
6500K

Features :

- Aluminum Casing / ABS End Caps / PMMA Lens
- Charging Cable: Type C Cable
- Installation: Magnetic Adhesive Plate x 2
- Functions: M1: 100% Always On
M2: Night&IR Sensor Trigger



Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Battery Capacity 电池容量	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYUCL-ZO-CAJMYGYD-200-CCT-E2	200*40*11	0.5W	600mAh	100lm/W Slide Switch 3 Step	3000K-6500K	99	43*21.5*27.5
XGYUCL-ZO-CAJMYGYD-300-CCT-E4	300*40*11	0.8W	900mAh	100lm/W Slide Switch 3 Step	3000K-6500K	100	63.5*25*25.5
XGYUCL-ZO-CAJMYGYD-400-CCT-E4	400*40*11	1.2W	1200mAh	100lm/W Slide Switch 3 Step	3000K-6500K	49	43*21.5*27.5
XGYUCL-ZO-CAJMYGYD-600-CCT-E5	600*40*11	1.2W	1500mAh	100lm/W Slide Switch 3 Step	3000K-6500K	50	63.5*25*25.5



Warm Light
3000K

Natural Light
4000K

White Light
6500K

Features :

- Aluminum Casing / PC Diiffuser / ABS End Caps
- Charging Cable: Type C Cable
- Installation: Magnetic Adhesive Plate x 2
- Functions: M1: 100% Always On
M2: Night&IR Sensor Trigger



Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Battery Capacity 电池容量	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYUCL-ZO-CAJGYD-200-SS-E2	200*40*11	1.6W	600mAh	100lm/W Stepless Dimming	3000K-6500K	99	43*21.5*27.5
XGYUCL-ZO-CAJGYD-300-SS-E2	300*40*11	2.1W	900mAh	100lm/W Stepless Dimming	3000K-6500K	100	63.5*25*25.5
XGYUCL-ZO-CAJGYD-400-SS-E3	400*40*11	2.6W	1200mAh	100lm/W Stepless Dimming	3000K-6500K	49	43*21.5*27.5
XGYUCL-ZO-CAJGYD-600-SS-E3	600*40*11	3W	1500mAh	100lm/W Stepless Dimming	3000K-6500K	50	63.5*25*25.5



Warm Light
3000K

Natural Light
4000K

White Light
6500K

Features :

- ✗ Aluminum Casing / PC Diiffuser / End Caps
- ✗ Charging Cable: Type C Cable
- ✗ Installation: Magnetic Adhesive Plate
- ✗ Functions: M1: 100% Always On
M2: Night&IR Sensor Trigger



Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Battery Capacity 电池容量	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYUCL-TQT088-20CM-E1	14.2*40*206	1W	1000mAh	100lm/W Remote Dimming	3000K-6500K	50	34*23.5*27
XGYUCL-TQT088-30CM-E1.5	14.2*40*306	1.5W	1500mAh	100lm/W Remote Dimming	3000K-6500K	50	34*32.5*27
XGYUCL-TQT088-40CM-E2	14.2*40*406	2W	2200mAh	100lm/W Remote Dimming	3000K-6500K	50	42.5*34*17



Warm Light
3000K

Natural Light
4000K

White Light
6500K

Features :

- ✗ Full ABS
- ✗ Charging Cable: Type C Cable
- ✗ Installation: Magnetic Adhesive Plate x 2
- ✗ Functions: M1: 100% Always On
M2: Night&IR Sensor Trigger



Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Battery Capacity 电池容量	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYUCL-ZO-LED-210MM-CCT-E7	210*38*23	3W	1200mAh	100lm/W Stepless Dimming	3000K-6500K	88	33.5*31.5*26
XGYUCL-ZO-LED-297MM-CCT-E11	297*38*23	3W	1800mAh	100lm/W Stepless Dimming	3000K-6500K	64	33.5*31.5*26



Warm Light
3000K

Natural Light
4000K

White Light
6500K

Features :

- ✗ ABS Casing / PC Diiffuser / End Caps
- ✗ Charging Cable: Type C Cable
- ✗ Installation: Magnetic Adhesive Plate
- ✗ Functions: M1: 100% Always On
M2: Night&IR Sensor Trigger



Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Battery Capacity 电池容量	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYUCL-TQT013-E1	29*40*300	1.5W	2000mAh	100lm/W Remote Dimming	3000K-6500K	50	39*32.5*27

LED Night Light



WT8B19
PC & ABS



WT8B18
PC & ABS

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Total Lumen 光通量	Battery Capacity 电池容量	Installation 安装方式	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYNLDC-WT8B18-E0.2	190*75*41	0.4W	25lm	Li-ion 3.7V 500mAh Recharge 3h	Screw Mounting	Light & IR Sensor/On/Off Use Time 6 hours USB Type C	8	20*18*16
XGYNLDC-WT8B19-E0.2	200*75*39	2.5W	120lm	Li-ion 3.7V 1100mAh Recharge 3h	Screw Mounting	On/Off Use Time 2 hours USB Type C	8	22*18*16.5

LED Night Light



CE FC ErP RoHS PS E



- Touch Color Changes RGBW
- German Front Socket
- Euro Plug

Model No. 产品规格	Dimension W*H*T(mm)	Rated Power 额定功率	Total Lumen 光通量	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYNLAC-JBRSW01W-E4	75*65*480	4W	320lm	3000K-6500K	PC & ABS	24	53.5*27*34.5
XGYNLAC-JBRSW01CW-E4	60*65*470	4W	320lm	3000K-6500K	PC & ABS	12	36*26*31



- 2XAA Battery
- Magnetic Adhesive Plate x 1
- M1:100% Always On
- M2: Night&IR Sensor Trigger
- Euro Plug

Model No. 产品规格	Dimension W*H*T(mm)	Rated Power 额定功率	Total Lumen 光通量	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYNLAC-KLYMOON-E4	84*73*84	0.6W	20lm	3000K-6500K	ABS+PP	300	49.5*48*63.5
XGYNLDC-REM-E0.2	Ø85*36	0.2W	10lm	3000K-6500K	PC Diffuser/PP Body	100	52*29*18.5



- RGBW Multi-Color Shade
- On/Off Switch
- Euro-Plug 2 Pin



Model No. 产品规格	Dimension WxHxT(mm)	Rated Power 额定功率	Total Lumen 光通量	Color Temp 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYNLAC-MCS-E0.5	73*39*103	0.5W	25lm	3000K-6500K	PS Lamp Shade ABS Body	64	67.5*44.5*32



- Touch Color Changes RGBW
- German Front Socket
- Euro Plug

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Total Lumen 光通量	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYNLAC-GFS-E0.6	Ø80*75	0.6W	10lm	3000K-6500K	Full PC	12	25*24*38.5
XGYNLAC-FFS-E0.6	Ø80*75	0.6W	10lm	3000K-6500K	Full PC	12	25*24*38.5
XGYNLAC-2USB-E0.6	Ø80*75	0.6W	10lm	3000K-6500K	Full PC	12	25*24*38.5



- M1/2: Always On/Off
- M3: Light Sensor
- M4: Light&PIR Sensor
- Emergency 300mAh Battery
- Japan 2 Pin Plug
- Touch On/Off&Dim&3CCT

Model No. 产品规格	Dimension WxHxL(mm)	Rated Power 额定功率	Total Lumen 光通量	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYNLAC-RBL-E1.5 [Back Light]	88*88*28	1.5W	50lm	3000K-6500K Touch CCT Change	Full PC	80	37.5*32.5*20.5
XGYNLAC-RBLS-E1.5 [Screen Temp & RH Display] [Back Light]	88*88*28	1.5W	50lm	3000K-6500K	Full PC	80	37.5*32.5*20.5



- CW / RGB Mode
- Mode Adjustable Button
- Sensor/Non-Sensor Mode
- Light & IR Sensor
- Recharge 10-15h
- Euro Plug

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Total Lumen 光通量	Color Temp. 色温	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYNLAC-WTG092-E4	186*83*50	1.3W	Torch 35lm Front 55lm	3000K-6500K	PC & ABS	24	41*28*24
XGYNLAC-WTG002-E4	115*60*36.5	2W	Torch 35lm Front 45lm	3000K-6500K	PC & ABS	24	55*39*36
XGYNLAC-WTG068-E0.7	115*60*36	0.7W	RGB	RGB / CW Adjustable Color Lockable	Full PC	24	53.5*27*34.5

LED Wall Lamp



XGYWL-1411



XGYWL-1411-PIR



XGYWL-1411-PHOTOCELL



IP44

CE FC ErP RoHS PS E



No Flicker



Dimmable
Option



Ra80



25000h



S: AC 220-240V
U: AC 100-240V



360°



For Outdoor



Class I

Model No. 产品规格	Dimension LxWxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp 色温	Body Material 材质	PF 功率因素	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYWL-1411	183*85*90	GU10 x2 Rating	GU10 Rating	3000K	ABS+PC ABS+Glass	0.5	16	42*40*19
XGYWL-1411-PIR	220*68*106	GU10 x2 Rating	GU10 Rating	3000K	ABS+PC ABS+Glass	0.5	12	36.5*24.5*32
XGYWL-1411-PHOTOCELL	220*68*106	GU10 x2 Rating	GU10 Rating	3000K	ABS+PC ABS+Glass	0.5	12	36.5*24.5*32



IP44



XGYWL-1393

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
GU10 x1 Rating	GU10 Rating	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS+PC Alu+Glass	3000K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
85*68*95	24	34*29*23



IP44



XGYWL-1394

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
GU10 x2 Rating	GU10 Rating	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS+PC Alu+Glass	3000K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
150*68*95	12	34*34*23



IP44



XGYWL-1391

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
GU10 x1 Rating	GU10 Rating	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS+PC Alu+Glass	3000K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
85*68*95	24	34*29*23



IP44



XGYWL-1392

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
GU10 x2 Rating	GU10 Rating	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS+PC Alu+Glass	3000K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
150*68*95	12	34*34*23



IP44



XGYWL-1393-2

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
GU10 x1 Rating	GU10 Rating	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS+PC Alu+Glass	3000K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
85*68*95	24	34*29*23



IP44



XGYWL-1394-2

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
GU10 x2 Rating	GU10 Rating	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS+PC Alu+Glass	3000K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
150*68*95	12	34*34*23



IP44



XGYWL-1391-2

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
GU10 x1 Rating	GU10 Rating	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS+PC Alu+Glass	3000K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
85*68*95	24	34*29*23



IP44



XGYWL-1392-2

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
GU10 x2 Rating	GU10 Rating	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS+PC Alu+Glass	3000K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
150*68*95	12	34*34*23



IP44



XGYWL-1412

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
GU10 x1 Rating	GU10 Rating	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS+PC Alu+Glass	3000K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
120*85*90	24	40*32*27.5



IP54



XGYWL-5931

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
E27 x1 Rating	E27 Rating	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
Alu+PC	3000K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
245*140*110	2	30*29.5*16



IP44



XGYWL-NZ18-E6

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
6W	60Lm/W	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS	3000K/4000K/6500K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
100*100*100	50	54*35*30



IP44



XGYWL-NZ19-E12

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
12W	60Lm/W	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS	3000K/4000K/6500K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
100*100*135	30	54*35*30



IP54



XGYWL-1352

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
2*6W	480Lm/W	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
Alu+Glass	3000K	0.8
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
175*90*29	16	42*22*20



IP54



XGYWL-1351

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
2*3W	240Lm/W	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
Alu+Glass	3000K	0.8
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
115*90*29	32	42*22*26



IP44



XGYWL-NZ20-E6

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
6W	60Lm/W	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS	3000K/4000K/6500K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
100*100*100	50	54*35*30



IP44



XGYWL-NZ21-E12

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
12W	60Lm/W	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS	3000K/4000K/6500K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
100*100*135	30	54*35*30



IP54



XGYW-1261

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
7W	250Lm/W	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
Alu+Glass	3000K	0.8
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
218*85*55	12	44*36*23



IP54



XGYWL-1271

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
7W	250Lm/W	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
Alu+Glass	3000K	0.8
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
120*144*45	15	34.5*30.5*25



IP44



XGYWL-NZ44-E6 XGYWL-NZ45-E12

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
6W 12W	60Lm/W	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS	3000K/4000K/6500K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ110 Φ165	30 50	54*35*30



IP44



XGYWL-NZ46-E6 XGYWL-NZ47-E12

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
6W 12W	60Lm/W	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS	3000K/4000K/6500K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ110 Φ165	30 50	54*35*30



IP54



XGYWL-6151

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
E27 x1 Rating	E27 Rating	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
Alu+PC	3000K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
167*108*80	6	29*19.5*26



IP54



XGYWL-6152

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
E27 x1 Rating	E27 Rating	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
Alu+PC	3000K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
167*108*80	6	29*19.5*26



IP44



XGYWL-NZ48-E6 XGYWL-NZ49-E12

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
6W 12W	60Lm/W	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS	3000K/4000K/6500K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ110 Φ165	30 50	54*35*30



IP44



XGYWL-NZ50-E6 XGYWL-NZ51-E12

Rated Power 额定功率	Lumen Efficacy 光效	Equipment Class 电器级别
6W 12W	60Lm/W	Class I
Body Material 材质	Color Temp. 色温	PF 功率因素
ABS	3000K/4000K/6500K	0.5
Dimension LxWxH(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸
Φ110 Φ165	30 50	54*35*30


Flood & Work Light

LED Flood Light (High Output)



Features :

- ☒ Durable & Rubber H05RN-F3G Cable, Optional Plugs for Different Countries
- ☒ High Transmission Tempered Glass, in Aerospace
- ☒ Aluminum Body of Good Heat Dissipation
- ☒ IP65 Protection Level

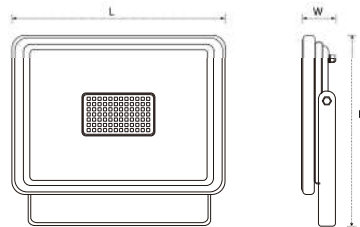

CB CE ErP 



No Flicker



Ra80



25000h



S: AC 220-240V
U: 110-240V



For Outdoor



110°



0.9

Model No. 产品规格	Dimension LxHxW(mm)	Rated Power 额定功率	Cable 电源线	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFL-XRHO-E150	320*230*30	150W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	5	36.0*22.0*26.5
XGYFL-XRHO-E200	380*365*30	200W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	5	42.0*22.0*29.0
XGYFL-XRHO-E250	380*340*45	250W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	5	41.0*31.5*36.5
XGYFL-XRHO-E300	480*310*60	300W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	2	50.5*41.5*22.5
XGYFL-XRHO-E400	500*375*60	400W	0.15m H05RN-F3G 1.00mm ² rubber cable	90-120 lm/W	3000K-6500K	2	56.5*44.5*22.5
XGYFL-XRHO-E500	605*480*77	500W	0.15m H05RN-F3G 1.50mm ² rubber cable	90-120 lm/W	3000K-6500K	1	61.0*8.7*50.0

Flood & Work Light

LED Flood Light (General Lighting)



Features :

- ☒ Durable & Rubber Cable, Optional Plugs for Different Countries
- ☒ Aluminum & Tempered Glass
- ☒ Aluminum Body of Good Heat Dissipation
- ☒ IP65 Protection Level

CB CE ErP 



No Flicker



Ra70/80



25000h



S: AC 220-240V
U: AC 110-240V



For Outdoor



110°



0.9

Model No. 产品规格	Dimension W*H*T(mm)	Rated Power 额定功率	Cable 电源线	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFL-YGUS-E10	86*67*25	10W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	60	32*28*23
XGYFL-YGUS-E20	96*80*25	20W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	60	32*31*25
XGYFL-YGUS-E30	128*98*25	30W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	40	32*31*25
XGYFL-YGUS-E50	164*128*25	50W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	40	38*32*30
XGYFL-YGUS-E70	195*152*25	70W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	40	34*34*22
XGYFL-YGUS-E100	270*185*27	100W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	10	34*30*21
XGYFL-YGUS-E150	330*220*27	150W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	10	36.5*34*24.5
XGYFL-YGUS-E200	370*260*28	200W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	10	40.5*35*28
XGYFL-YGUS-E300	450*330*30	300W	Rubber L:0.15m [3*0.75/1.0mm ²]	95-110lm/W	3000K-6500K	10	47.5*35*30



Collapsible Series

Model No. 产品规格	XGYFL-PORTCL-E10	XGYFL-PORTCL-E20	XGYFL-PORTCL-E30	XGYFL-PORTCL-E50	XGYFL-PORTCL-E100
Relative Power 对应功率	10W	20W	30W	50W	100W
Dimension W*H*L(mm)	160*200*140	170*210*150	205*230*160	240*260*175	340*310*185



I Shape Series

Model No. 产品规格	XGYFL-PORTIS-E10	XGYFL-PORTIS-E20	XGYFL-PORTIS-E30	XGYFL-PORTIS-E50	XGYFL-PORTIS-E100
Relative Power 对应功率	10W	20W	30W	50W	100W
Dimension W*H*L(mm)	137*205*100	147*215*115	175*235*145	215*275*165	325*330*185



S Shape Series

Model No. 产品规格	XGYFL-PORTSS-E10	XGYFL-PORTSS-E20	XGYFL-PORTSS-E30	XGYFL-PORTSS-E50	XGYFL-PORTSS-E100
Relative Power 对应功率	10W	20W	30W	50W	100W
Dimension W*H*L(mm)	165*230*155	175*245*165	230*295*195	270*320*205	340*360*215



Tripod Series

Model No. 产品规格	XGYFL-PORTSS-E10	XGYFL-PORTSS-E20	XGYFL-PORTSS-E30	XGYFL-PORTSS-E50	XGYFL-PORTSS-E100
Relative Power 对应功率	10W	20W	30W	50W	100W
Dimension (Includes lights) W*H*L(mm)	77*223*77	77*236*77	77*254*77	77*284*77	77*341*77

Flood & Work Light

LED 360° Cylindrical Working Light (Portable Vesion)



Portable Model




Power Input



Interconnection Base



Collapse Mode

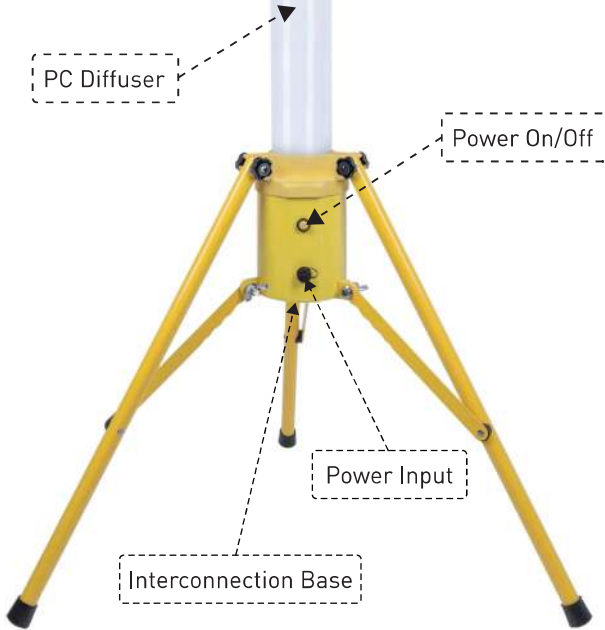

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Cable Length 插头线长度	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYCWL-P-E65	Φ165*900 Φ800*1260	65W	3m/5m/10m	85 lm/W	3000K-6500K	1	20*20*91
XGYCWL-PR-E40 (Rechargeable)	Φ165*900 Φ800*1260	40W	3m/5m/10m	85 lm/W	3000K-6500K	1	20*20*91

LED Solar Lighting

Solar Flood Light (Separate Solar Panel) – Economic



LED Solar Lighting

Solar Flood Light (Separate Solar Panel) – Standard



01



Model No. 产品规格	Dimension W*H*L(mm)	Solar Panel Spec. 太阳能板参数	Solar Panel Size 太阳能板尺寸(mm)	Power 功率	Total Lumen 光通量	Battery Capacity 电池容量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSFL-ZN-209-E50	200*175*40	6V/10W Monocrystalline Silicon	390*180*17	50W	360lm	18650 6000mAh	10	38.5*38*42
XGYSFL-ZN-209-E100	250*225*40	6V/15W Monocrystalline Silicon	390*240*17	100W	750lm	18650 12000mAh	10	49*38*42
XGYSFL-ZN-209-E200	290*260*40	6V/20W Monocrystalline Silicon	390*310*17	200W	1150lm	18650 18000mAh	10	65.5*38*42
XGYSFL-ZN-209-E300	320*295*40	6V/30W Monocrystalline Silicon	390*440*17	300W	1550lm	18650 30000mAh	6	41.5*45*43

02



Model No. 产品规格	Dimension W*H*L(mm)	Solar Panel Spec. 太阳能板参数	Solar Panel Size 太阳能板尺寸(mm)	Power 功率	Total Lumen 光通量	Battery Capacity 电池容量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSFL-ZN-210-E50	195*152*40	6V/10W Monocrystalline Silicon	390*180*17	50W	360lm	18650 6000mAh	10	48*36.5*23
XGYSFL-ZN-210-E100	230*172*40	6V/15W Monocrystalline Silicon	390*240*17	100W	750lm	18650 12000mAh	10	48*45.5*31
XGYSFL-ZN-210-E200	267*190*45	6V/20W Monocrystalline Silicon	390*310*17	200W	1150lm	18650 18000mAh	10	48*47.5*41.5
XGYSFL-ZN-210-E300	305*208*45	6V/30W Monocrystalline Silicon	390*440*17	300W	1550lm	18650 30000mAh	10	61.5*48*41.5

LED Solar Lighting

Solar Flood Light (Integrated Solar Panel)



Features :

- Body Material: ABS+GLASS
- IP65 Protection Level



03



Model No. 产品规格	Dimension W*H*L(mm)	Solar Panel Spec. 太阳能板参数	Sensor Type 感应方式	Total Lumen 光通量	Battery Capacity 电池容量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFL-LC-XRSL03	124.4*42.3*90.7	5V/1.7W Monocrystalline Silicon	Microwave DIM100%-50%-20%	800lm / 400lm 150lm	18650 1800mAh	10	48*36.5*23
XGYFL-LC-XRSL04	160*36.5*145.5	5V/2.5W Monocrystalline Silicon	PIR DIM100%-50%-20%	800lm / 400lm 150lm	18650 1800mAh	20	34.5*25.5*32

LED Solar Lighting

Solar Landscape Flood (Integrated Solar Panel)



Features :

- Body Material: ABS+GLASS




04



Model No. 产品规格	Dimension W*H*L(mm)	Solar Panel Spec. 太阳能板参数	Sensor Type 感应方式	Total Lumen 光通量	Battery Capacity 电池容量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFL-LC-XRSLDC04	160*36.5*145.5	5V/2.5W Monocrystalline Silicon	PIR DIM100%-50%-20%	800lm / 400lm 150lm	18650 1800mAh*1pc	20	34.5*25.5*32
XGYFL-LC-XRSLDC01	91*125*42	3.7V/4.5W Monocrystalline Silicon	DIM	800lm / 480lm 240lm	18650 1800mAh*2pc	20	45.4*36.8*35.8

LED Solar Lighting

Solar Wall Lamp

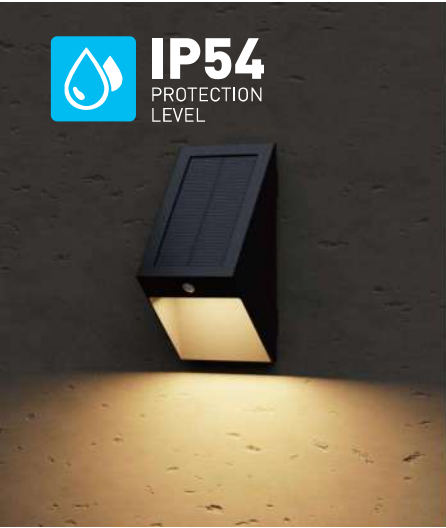

Features :

- Body Material: SPCC IRON+PC
- IP54 Protection Level



ARRO

STRP


TRNG

HNBP

LTRP

WFLEN

Model No. 产品规格	Dimension W*H*L(mm)	Solar Panel Spec. 太阳能板参数	Sensor Type 感应方式	Total Lumen 光通量	Battery Capacity 电池容量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSWL-TRNG-E0.2	180*90*73.7	5.5V/1.1W Monocrystalline Silicon	IR Sensor	30lm	18650 2000mAh	50	38.8*49.6*43.3
XGYSWL-HNBP-E0.3	300*150*81	5.5V/1.5W Monocrystalline Silicon	House Number Display Smart Discharge Curve	30lm	18650 2000mAh	15	48.4*45*33.1
XGYSWL-ARRO-E0.15	100*90*103	5.5V/0.7W Monocrystalline Silicon	IR Sensor Rotatable Head	30lm	18650 1200mAh	100	54.6*52.1*52.7
XGYSWL-STRP-E0.15	95*85*100	5.5V/0.7W Monocrystalline Silicon	IR Sensor	30lm	18650 1200mAh	100	44*45.6*41.3
XGYSWL-LTRP-E0.15	70*60*100	5.5V/0.7W Monocrystalline Silicon	IR Sensor	30lm	18650 1200mAh	100	52.1*47.1*45.5
XGYSWL-WFLEN-E0.3	Φ201*109	5.5V/1W Monocrystalline Silicon	IR Sensor	30lm	18650 2000mAh	30	45.4*59.6*44.3




XGYSWL-MYSW-HY03-E6.7

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
6.7W	900lm max	254*97*108
Battery Capacity 电池容量	Solar Panel Spec. 太阳能板参数	
18650 3600mAh	5V/2.5W Monocrystalline Silicon	
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS+PC	24	54*44.2*42



XGYSWL-MYSW-HY04-E6.7

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
6.7W	900lm max	222*148*91
Battery Capacity 电池容量	Solar Panel Spec. 太阳能板参数	
18650 3600mAh	5V/2.5W Monocrystalline Silicon	
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS+PC	24	49*50*44.5




XGYSWL-MYSW-SR01-E2.5

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
2.5W	250lm	204*162*89
Battery Capacity 电池容量	Solar Panel Spec. 太阳能板参数	
18650 1200mAh	5.5V/1.5W Monocrystalline Silicon	
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS+PC	18	53*48.5*39



XGYSWL-MYSW-SR02-E2.5

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
2.5W	250lm	177*145*154
Battery Capacity 电池容量	Solar Panel Spec. 太阳能板参数	
18650 1200mAh	5.5V/1.5W Monocrystalline Silicon	
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS+PC	18	53*48.5*39




XGYSWL-MYSW-STC03-E2.5

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
2.5W	250lm	152*96*84
Battery Capacity 电池容量	Solar Panel Spec. 太阳能板参数	
18650 1200mAh	5V/1W Monocrystalline Silicon	
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS	48	43.5*39*48



XGYSWL-MYSW-HT01-E0.4

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
0.4W	30/20lm	70*50*120
Battery Capacity 电池容量	Solar Panel Spec. 太阳能板参数	
18650 1200mAh	5V/0.6W Monocrystalline Silicon	
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS+PC	100	52.7*39*32



XGYSWL-MYSW-HT02-E0.8

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
0.8W	30/20lm	162*100*42
Battery Capacity 电池容量	Solar Panel Spec. 太阳能板参数	
18650 1800mAh	5V/1.5W Monocrystalline Silicon	
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
PMMA+ABS	48	47*40*37.5




XGYSWL-MYSW-ST01-E2.5

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
2.5W	250lm	163*111*100
Battery Capacity 电池容量	Solar Panel Spec. 太阳能板参数	
18650 1200mAh	5.5V/1.5W Monocrystalline Silicon	
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS+PP	24	46*36*38



XGYSWL-HC-P9117-E2.4

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
2.4W	280lm	212*80*82
Battery Capacity 电池容量		Solar Panel Spec. 太阳能板参数
18650 1800mAh		3.7V/1.7W Monocrystalline Silicon
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS+PC	20	44*19*45.5



XGYSWL-HC-P9118-E2.4

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
2.4W	280lm	125*84*120
Battery Capacity 电池容量		Solar Panel Spec. 太阳能板参数
18650 1200mAh		3.7V/1W Monocrystalline Silicon
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS+PC	20	46*27.5*27



XGYSWL-HC-P9114-E2.4

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
2.4W	280lm	200*100*90
Battery Capacity 电池容量		Solar Panel Spec. 太阳能板参数
18650 1500mAh		3.7V/1.2W Monocrystalline Silicon
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS+PC	20	49*22.5*43



XGYSWL-HC-P9114L-E2.4

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
4.5W	520lm	350*100*90
Battery Capacity 电池容量		Solar Panel Spec. 太阳能板参数
18650 2200mAh		3.7V/2.3W Monocrystalline Silicon
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS+PC	20	49*22.5*73



XGYSWL-HC-P9112-E2.4

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
2.4W	280lm	180*91*96
Battery Capacity 电池容量		Solar Panel Spec. 太阳能板参数
18650 1500mAh		3.7V/1.6W Monocrystalline Silicon
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS+PC	20	49*22*40



XGYSWL-HC-P9113-E2.4

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
2.4W	280lm	150*150*90
Battery Capacity 电池容量		Solar Panel Spec. 太阳能板参数
18650 1200mAh		3.7V/1W Monocrystalline Silicon
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
ABS+PC	20	49*23.5*33



XGYSWL-HC-P9134-E2.4

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
2.4W	280lm	185*75*99
Battery Capacity 电池容量		Solar Panel Spec. 太阳能板参数
18650 1500mAh		3.7V/1.6W Monocrystalline Silicon
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
Aluminum	10	41.5*20.5*23



XGYSWL-HC-P9134L-E4.5

Rated Power 额定功率	Total Lumen 光通量	Dimension W*H*L(mm)
4.5W	520lm	221*85*111
Battery Capacity 电池容量		Solar Panel Spec. 太阳能板参数
18650 2200mAh		3.7V/2.2W Monocrystalline Silicon
Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
Aluminum	10	46.5*24*25



LED Solar Lighting

Solar Garden Light (Special Design)



CUDL



MHC



TRLN



COCB

Model No. 产品规格	Dimension W*H*L(mm)	Solar Panel Spec. 太阳能板参数	Body Material 材质	Total Lux 照度	Battery Capacity 电池容量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSGL-CUDL-E0.3x2	175*175*702	5.5V/1.2W Monocrystalline Silicon	PA6+Iron	40Lux	18650 2000mAh	2	41.5*22.7*75.5
XGYSGL-MHC-E0.3	175*115*589	5.5V/1.2W Monocrystalline Silicon	PA6+Iron	40Lux	18650 2000mAh	6	57.5*38.5*62.5
XGYSGL-TRLN-E0.3	160*140*325	5.5V/1.2W Monocrystalline Silicon	PA6+Iron	40Lux	18650 2000mAh	4	45*45*35.6
XGYSGL-COCB-E0.3	124*124*626	5.5V/2W Monocrystalline Silicon	Plastic+Iron	45Lux	18650 4000mAh	4	68.5*31.5*32

LED Solar Lighting

Solar Garden Light (Lantern Style)



Model No. 产品规格	Rated Power 额定功率	Solar Panel Spec. 太阳能板参数	Body Material 材质	Lumen Efficacy 光效	Battery Capacity 电池容量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSGL-YH129	2.8W	5.5V/3W Monocrystalline Silicon	Aluminum+PC	70lm/W	18650 3.7V/4400mAh	8	45*33*63
XGYSGL-YH130	2.8W	5.5V/3W Monocrystalline Silicon	Aluminum+PC	70lm/W	18650 3.7V/4400mAh	8	65*33*63
XGYSGL-YH131	2.8W	5.5V/3W Monocrystalline Silicon	Aluminum+PC	70lm/W	18650 3.7V/4400mAh	8	85*33*63

LED Solar Lighting

Solar Lamp of Multiple Installations



Features :

- Light Sensor
- IP54 Protection Level



Model No. 产品规格	Rated Power 额定功率	Solar Panel Spec. 太阳能板参数	Body Material 材质	Total Lumen 光通量	Battery Capacity 电池容量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSGL-YD238-E4	4W	5V/3.7W Monocrystalline	Die-cast Alu +PMMA	360lm	18650 3.7V/4000mAh	8	60*60*39
XGYSGL-YD087-E4	4W	5V/3.7W Monocrystalline	Alu+PC	360lm	18650 3.7V/4000mAh	4	50*50*31.5

LED Solar Lighting

LED Solar Lamp of Multiple Installations



Features :

- Light Sensor
- IP65 Protection Level



White Warm



White Warm




Mobile APP intelligent control:

- Support 4 default scenes and DIY scene selection
- Power management, low power reminder function
- Adjust the light
- Turn the lights on/off regularly
- Support lighting and music Sync

Model No. 产品规格	Rated Power 额定功率	Solar Panel Spec. 太阳能板参数	Body Material 材质	Total Lumen 光通量	Battery Capacity 电池容量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSG-LYD231-E4	4W	5V/3.7W Monocrystalline	Alu+PMMA	360lm	18650 3.7V/4000mAh	1	28*28*17.5
XGYSG-LYD404-E3	2-3W	Single crystal glass laminated 150*2.0mm 5V/2W	Alu+PC	200lm	3.7V/4000mAh	8	46*46*57

Horticultural Lighting

LED Newlights Harvest Lamp

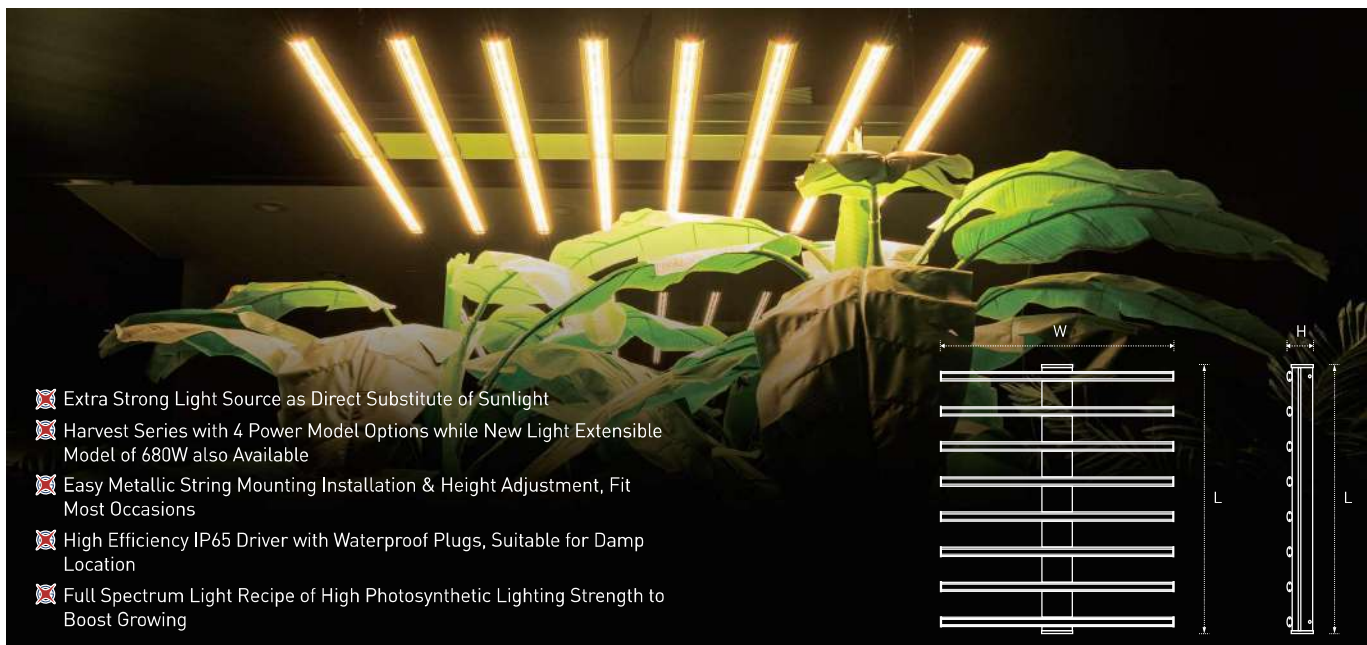


- Extra Strong Light Source as Direct Substitute of Sunlight
- Harvest Series with 4 Power Model Options while New Light Extensible Model of 680W also Available
- Easy Metallic String Mounting Installation & Height Adjustment, Fit Most Occasions
- High Efficiency IP65 Driver with Waterproof Plugs, Suitable for Damp Location
- Full Spectrum Light Recipe of High Photosynthetic Lighting Strength to Boost Growing



Foldable Model




860W Model
8 Bars EFF2.3





Model No. 产品规格	Dimension LxWxH(mm)	Rated Power 额定功率	Input Voltage 输入电压	Customized Lighting 定制光源方案	PPF 光合光子通量(400-700nm)	EFF(PPE) 光合光子通量效率(400-700nm)	PF 功率因素
XGY-PGL-HV-E320	550*1130*114	320W	U: 100-277V	Full Spectrum	850μmol / s	2.3μmol / J	0.5 0.9
XGY-PGL-HV-E640	1130*1130*114	640W	U: 100-277V	Full Spectrum	1,500μmol / s	2.3μmol / J	0.5 0.9
XGY-PGL-HV-E860	1130*1130*114	860W	U: 100-277V	Full Spectrum	2,000μmol / s	2.3μmol / J	0.5 0.9
XGY-PGL-HV-E1075	1130*1130*114	1075W	U: 100-277V	Full Spectrum	2,600μmol / s	2.3μmol / J	0.5 0.9
XGY-PGL-NLE-E680	1100*1100*50	680W	U: 100-277V	Full Spectrum	1,600μmol / s	2.3μmol / J	0.5 0.9

Rated Power and Photometric Data are Subjected to Changes for Customized Chips



PPFD:

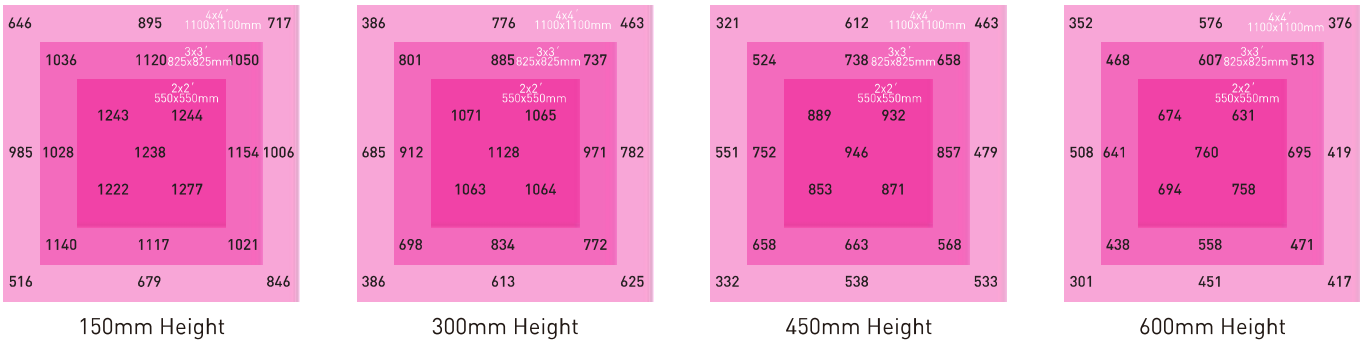




Spectrum:

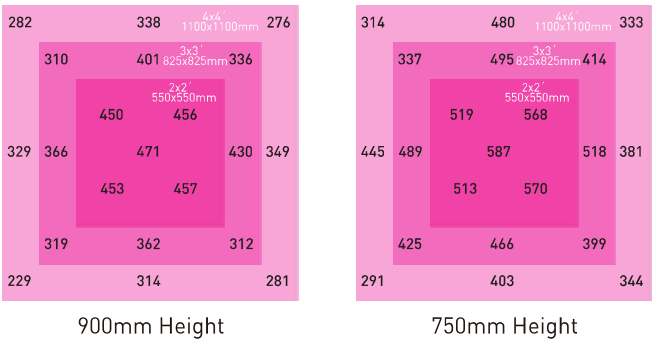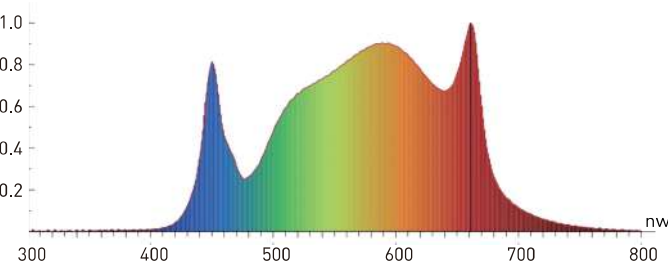

Luminary Structure

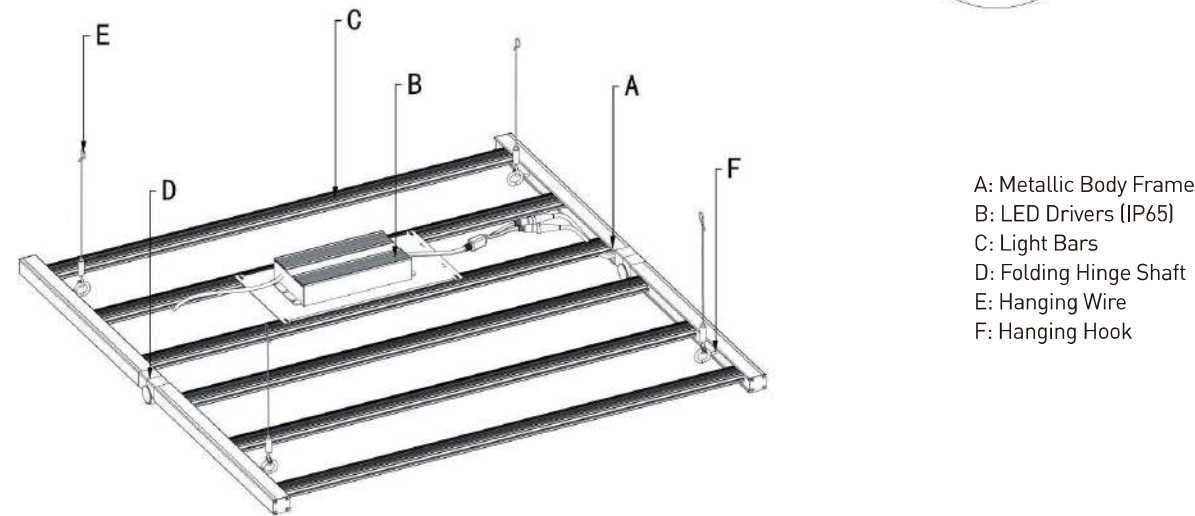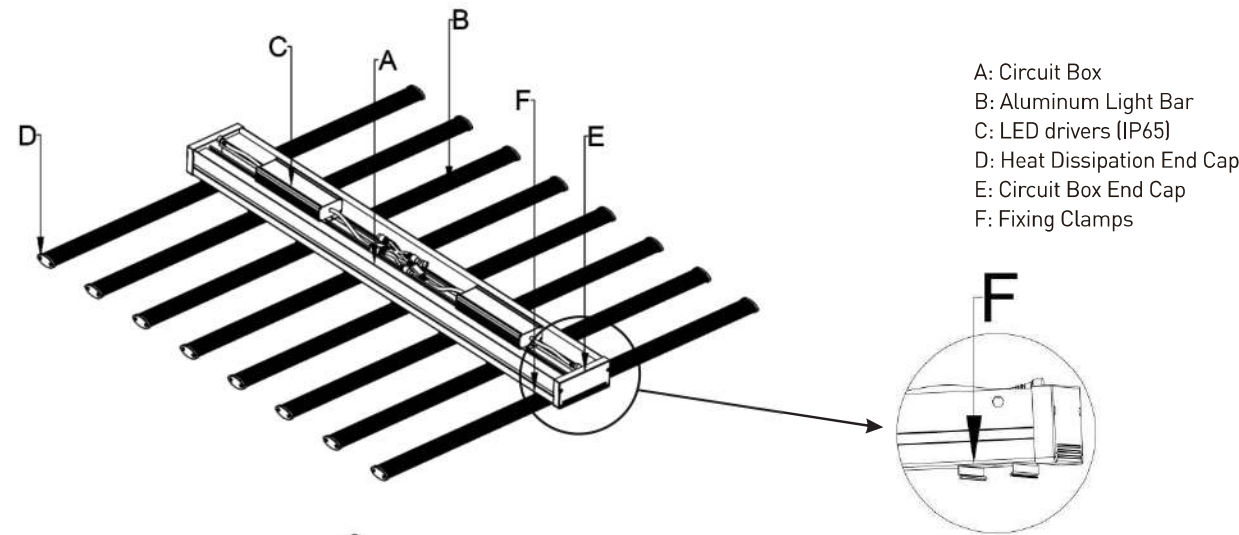


Installations:

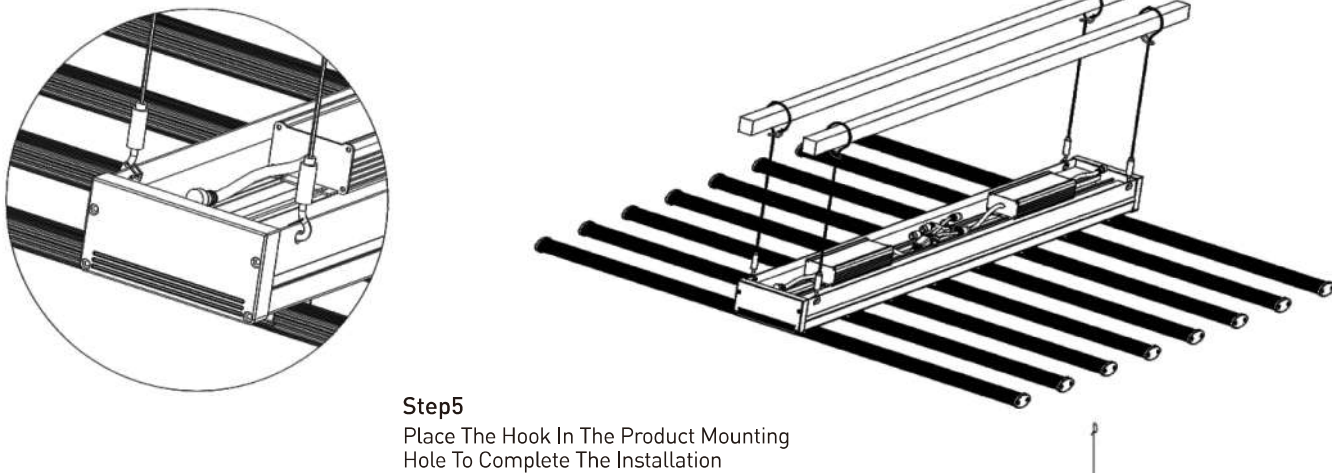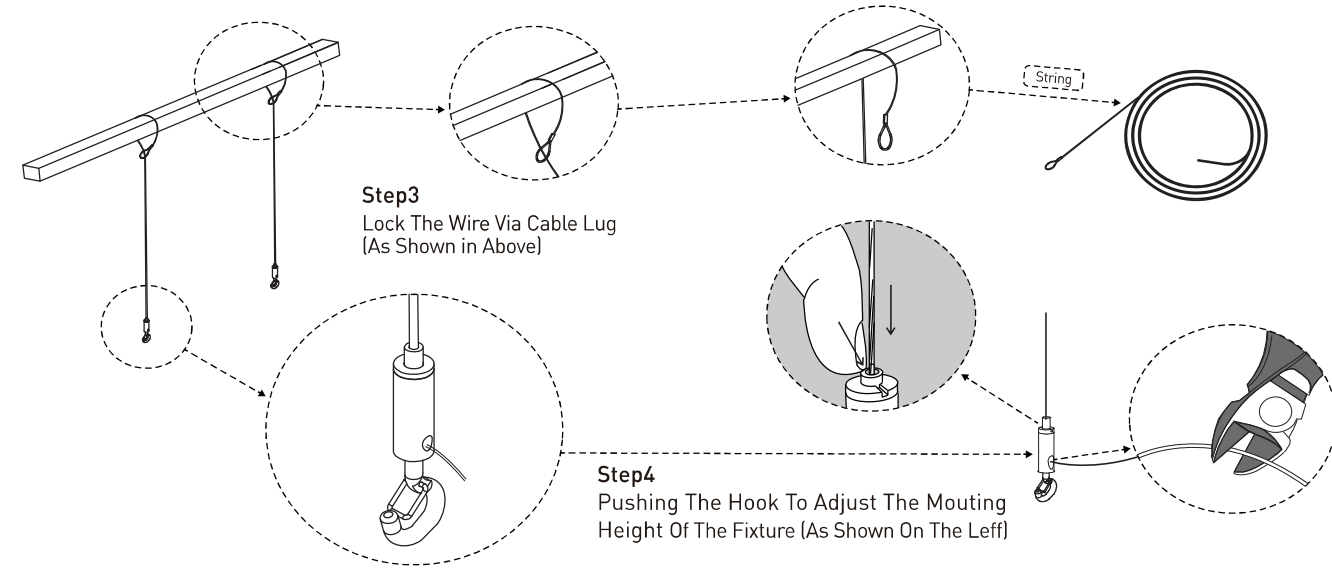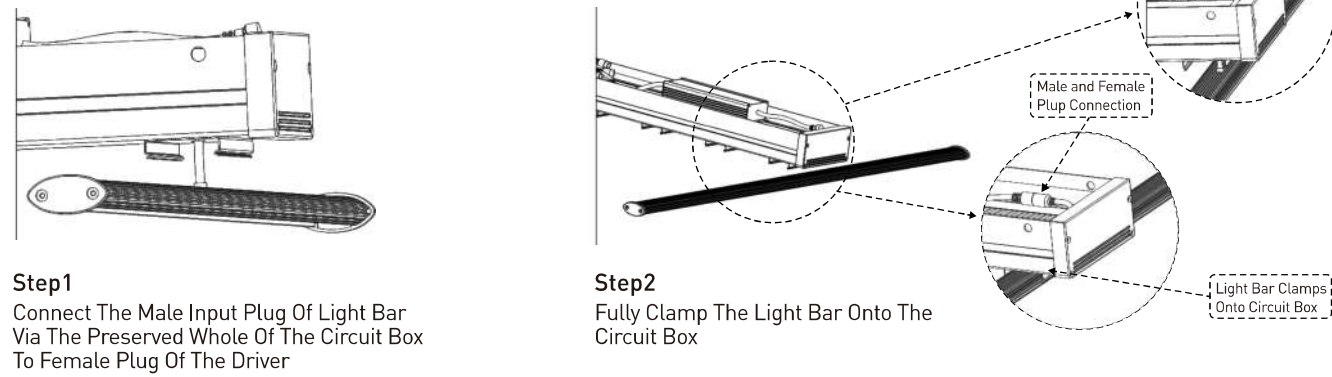

Horticultural Lighting

T8 Grow Tube & Linear Fixture

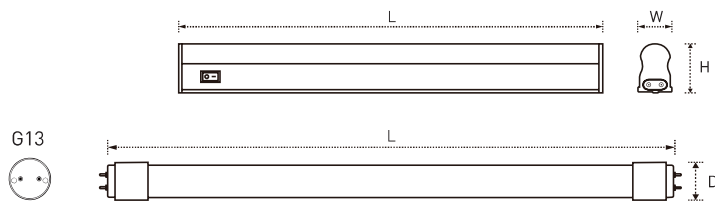

CE ErP



No Flicker



Full Spectrum



25000h



For Indoor



320°/120°

Model No. 产品规格	Dimension (W*H)/DxL(mm)	Rated Power 额定功率	Input Voltage 输入电压	Customized Lighting 定制光源方案	PPF 光合光子通量(400-700nm)	EFF(PPE) 光合光子通量效率(400-700nm)	PF 功率因素
XGYPGL-T8102-E9	Φ26*590	9W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	13.5μmol / s	1.5μmol / J	0.5 0.9
XGYPGL-T8103-E12	Φ26*895	12W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	21μmol / s	1.8μmol / J	0.5 0.9
XGYPGL-T8104-E18	Φ26*1199	18W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	35μmol / s	1.9μmol / J	0.5 0.9
XGYPGL-T8105-E22	Φ26*1499	22W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	42μmol / s	1.9μmol / J	0.5 0.9
XGYPGL-T5F201-E5 XGYPGL-T5F701-E5	23*34*300	5W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	7.5μmol / s	1.5μmol / J	0.5 0.9
XGYPGL-T5F202-E9 XGYPGL-T5F702-E9	23*34*572	9W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	13.5μmol / s	1.5μmol / J	0.5 0.9
XGYPGL-T5F203-E12 XGYPGL-T5F703-E12	23*34*880	12W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	21μmol / s	1.8μmol / J	0.5 0.9
XGYPGL-T5F204-E18 XGYPGL-T5F704-E18	23*34*1178	18W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	35μmol / s	1.9μmol / J	0.5 0.9
XGYPGL-T5F205-E22 XGYPGL-T5F705-E22	23*34*1478	22W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	44μmol / s	2μmol / J	0.5 0.9

Rated Power and Photometric Data are Subjected to Changes for Customized Chips

Horticultural Lighting

IP65 T8 LED Tube



IP65
PROTECTION
LEVEL



CE ErP



No Flicker



Full Spectrum



25000h



For Indoor



320°

Model No. 产品规格	Dimension DxL(mm)	Rated Power 额定功率	Input Voltage 输入电压	Customized Lighting 定制光源方案	PPF 光合光子通量(400-700nm)	EFF(PPE) 光合光子通量效率(400-700nm)	PF 功率因素
XGYPGL-T8IP65-E9	Φ26*590	9W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	13.5μmol / s	1.5μmol / J	0.5 0.9
XGYPGL-T8IP65-E12	Φ26*895	12W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	21μmol / s	1.8μmol / J	0.5 0.9
XGYPGL-T8IP65-E18	Φ26*1199	18W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	35μmol / s	1.9μmol / J	0.5 0.9
XGYPGL-T8IP65-E22	Φ26*1499	22W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	42μmol / s	1.9μmol / J	0.5 0.9

Rated Power and Photometric Data are Subjected to Changes for Customized Chips

Horticultural Lighting

LED Filament & PAR Bulb



A60 OFF



A60 ON



BR30



PAR38




CE ErP RoHS

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Input Voltage 输入电压	Customized Lighting 定制光源方案	PPF 光合光子通量(400-700nm)	EFF(PPE) 光合光子通量效率(400-700nm)	PF 功率因素
XGYA60(A19)-E4	Φ60*108	4W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	7μmol / s	1.8μmol / J	0.5 0.9
XGYA60(A19)-E6	Φ60*108	6W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	10.5μmol / s	1.8μmol / J	0.5 0.9
XGYA60(A19)-E8	Φ60*108	8W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	14μmol / s	1.8μmol / J	0.5 0.9
XGYPGL-BR30-E10	Φ56*130	10W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	17μmol / s	1.7μmol / J	0.5 0.9
XGYPGL-PAR38-1-E18	Φ125*135	18W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	32μmol / s	1.8μmol / J	0.5 0.9
XGYPGL-PAR38-2-E18	Φ122*128	18W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	32μmol / s	1.8μmol / J	0.5 0.9
XGYPGL-PAR38-3-E18	Φ120*107	18W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	32μmol / s	1.8μmol / J	0.5 0.9
XGYPGL-PAR38-4-E30	Φ120*135	30W	S: 180-265V U: 85-265V	R&B+Daylight Full Spectrum	50μmol / s	1.7μmol / J	0.5 0.9

Rated Power and Photometric Data are Subjected to Changes for Customized Chips

Horticultural Lighting

LED Flood Light & UFO



FL-E200



UFO



FL-E50



FL-E100



FL-E150




FU0

CE ErP RoHS


Model No. 产品规格	Dimension (L*W*H)/D(mm)	Rated Power 额定功率	Input Voltage 输入电压	Customized Lighting 定制光源方案	PPF 光合光子通量(400-700nm)	EFF(PPE) 光合光子通量效率(400-700nm)	PF 功率因素
XGYPGL-FL-E50	235*230*50	50W	U: 85-265V	R&B+Daylight Full Spectrum	85μmol / s	1.7μmol / J	0.5
XGYPGL-FL-E100	290*325*50	100W	U: 85-265V	R&B+Daylight Full Spectrum	150μmol / s	1.5μmol / J	0.5
XGYPGL-FL-E150	425*325*55	150W	U: 85-265V	R&B+Daylight Full Spectrum	180μmol / s	1.2μmol / J	0.5
XGYPGL-FL-E200	525*325*52	200W	U: 85-265V	R&B+Daylight Full Spectrum	240μmol / s	1.2μmol / J	0.5
XGYPGL-UFO-E100	Φ 300	100W	U: 85-265V	R&B+Daylight Full Spectrum	200μmol / s	2μmol / J	0.9
XGYPGL-UFO-E150	Φ 365	150W	U: 85-265V	R&B+Daylight Full Spectrum	300μmol / s	2μmol / J	0.9
XGYPGL-UFO-E200	Φ 420	200W	U: 85-265V	R&B+Daylight Full Spectrum	400μmol / s	2μmol / J	0.9

Rated Power and Photometric Data are Subjected to Changes for Customized Chips



Horticultural Lighting

LED Table Growing Fixture

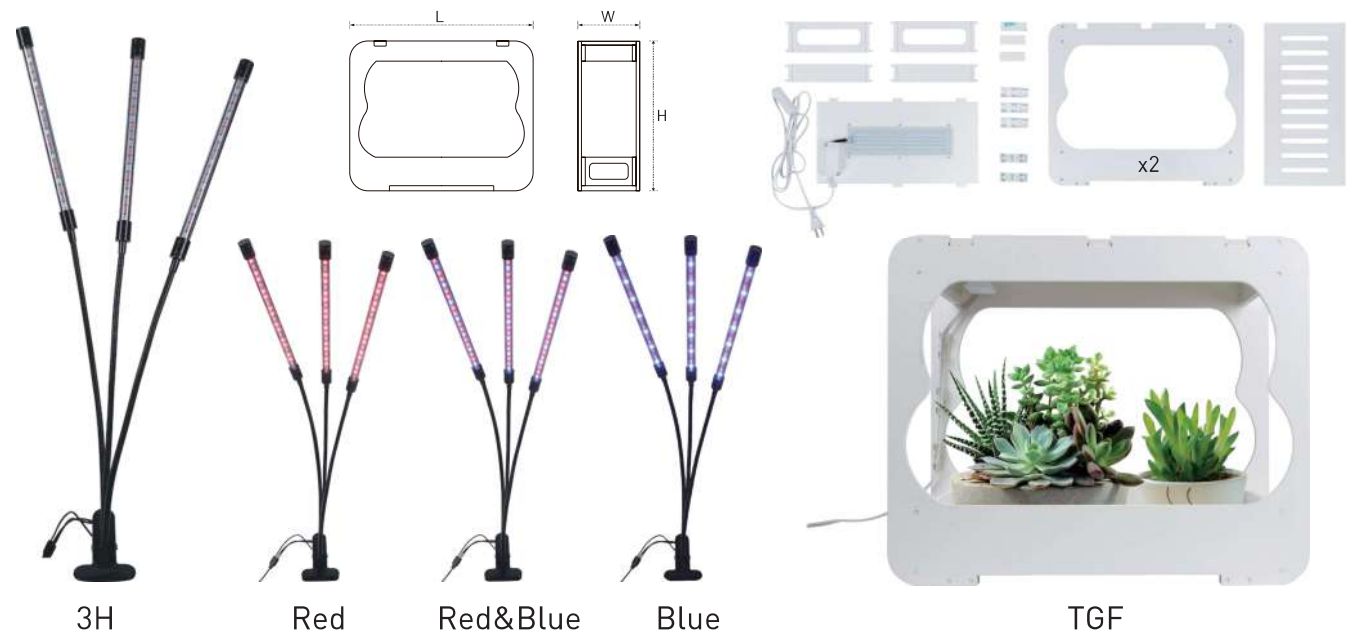

CE ErP RoHS



Model No. 产品规格	Dimension LxWxH(mm)	Rated Power 额定功率	Input Voltage 输入电压	Customized Lighting 定制光源方案	PPF 光合光子通量(400-700nm)	EFF(PPE) 光合光子通量效率(400-700nm)	PF 功率因素
XGYPGL-TGF-E14	384*174*320	14W	U: 100-265V	R&B+Daylight Full Spectrum	17μmol / s	1.1μmol / J	0.5
XGYPGL-3H-E10	245*380	10W	AC:100-240V DC:5V 3A	R&B	9μmol / s	0.9μmol / J	0.5

Rated Power and Photometric Data are Subjected to Changes for Customized Chips








Horticultural Lighting

Spectrum Available



Features:


- LED Light Source and Phosphor Powder Control to Achieve Desired Spectrum
- Pre-defined Full Spectrum Light Source, Suitable for Almost ALL Plants
- Chips For Vegetables / Flowers / Grow Seedlings / Fruits / Succulent / Rhizomatous
- Chips Formulation Can Support Almost All Lighting Fixtures
- Chips Arrangement Can be Customized, or Evenly Distributed

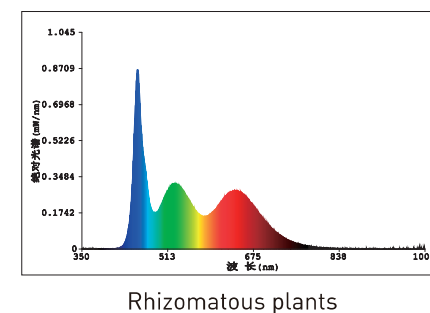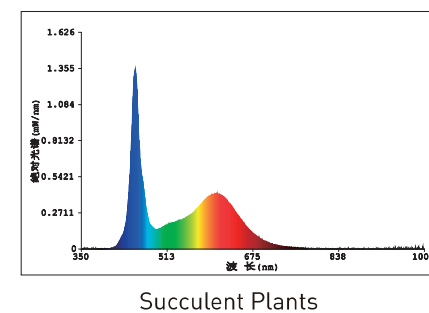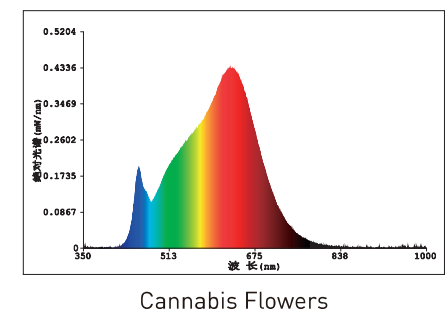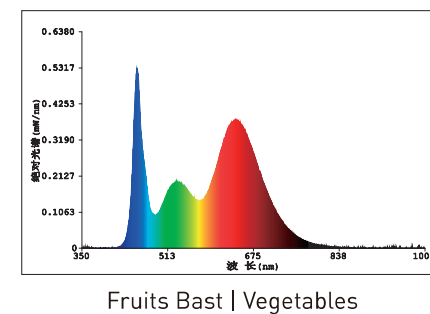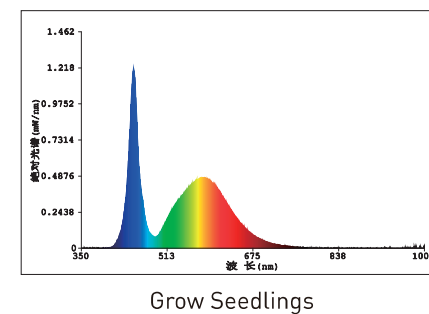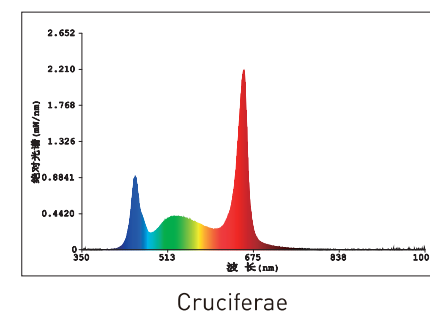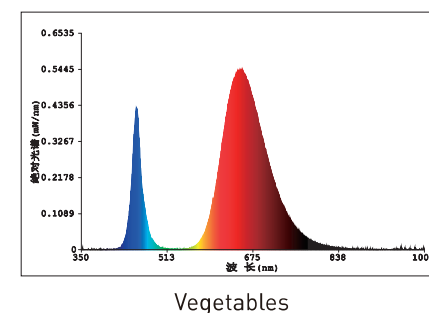

Model No. 产品规格	SMD LED规格	Target Plants 适用植物	Photons 光量子(380-780nm)	Photons 光量子(380-600nm)	Photons 光量子(500-700nm)	PPF 光合光子通量(400-700nm)	EFF(PPE) 光合光子通量效率(400-700nm)
Full Spectrum Chips (1ALUs)	2835	Vegetables	3.4e-1μmol / s/s	4.9e-1μmol / s/s	2.4e-1μmol / s/s	0.28μmol/s	1.58μmol/J
Full Spectrum Chips (1ALUs)	2835	Cruciferae	6.2e-1μmol / s/s	2.6e-1μmol / s/s	5.0e-1μmol / s/s	0.60μmol/s	1.98μmol/J
Full Spectrum Chips (1ALUs)	2835	Grow Seedlings	4.0e-1μmol / s/s	2.9e-1μmol / s/s	2.8e-1μmol / s/s	0.40μmol/s	2.18μmol/J
Full Spectrum Chips (1ALUs)	2835	Fruits Bast/Vegetables	3.3e-1μmol / s/s	1.3e-1μmol / s/s	2.4e-1μmol / s/s	0.30μmol/s	1.68μmol/J
Full Spectrum Chips (1ALUs)	2835	Cannabis Flowers	3.7e-1μmol / s/s	1.6e-1μmol / s/s	3.1e-1μmol / s/s	0.34μmol/s	1.95μmol/J
Full Spectrum Chips (1ALUs)	2835	Succulent Plants	3.9e-1μmol / s/s	2.5e-1μmol / s/s	2.5e-1μmol / s/s	0.38μmol/s	2.1μmol/J
Full Spectrum Chips (1ALUs)	2835	Rhizomatous plants	3.5e-1μmol / s/s	2.0e-1μmol / s/s	2.3e-1μmol / s/s	0.32μmol/s	1.87μmol/J

LED Smart & Ambient


LED Smart Television LED Strip

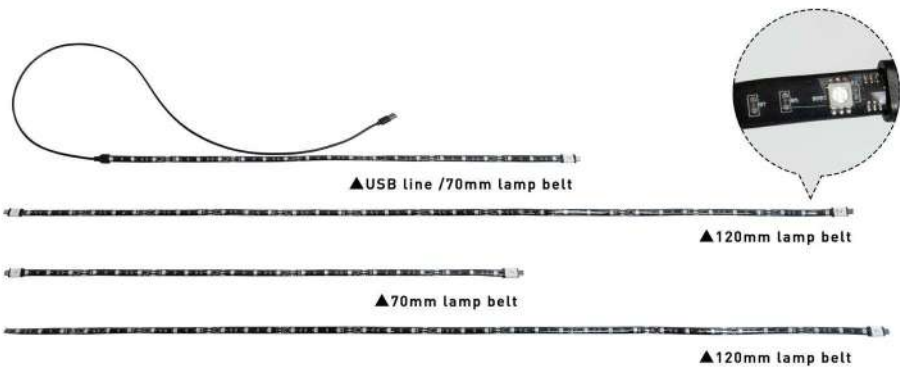

Model No. 产品规格	Dimension W*H*T(mm)	Power Rating 产品功率	Adaptor Electrical Data 适配器电参数	Functions 功能	Color Temp. 色温
XGYSTLS-PET-LST13W	1200*10 2pcs 700*10 2pcs	2W/meter	In: 120-240V Out: 12V / 2A	WIFI	RGB
Suitable TV Size 适配电视尺寸	Wifi Standards WIFI标准	Smart Phone System 手机系统	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)	
55"-65"	Channel:80211 b/g/n 1-14@2.4GHz support WPA/WPA2	≥IOS8.0 ≥Android4.4	10	40*16*20	

LED Smart & Ambient

Amazing Cubes Table Lamp



- Click & RGB Color Light
- Auto Flash/Breath Mode
- Single Cube Flashing
- Multi-Cube Sync. Flashing






Model No. 产品规格	Dimension W*H*T (mm)	Power Rating 产品功率	Charging Cable 充电线	Battery Capacity 电池容量	Color Temp. 色温	Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTL-MAC-PB-E0.1x5	77*77*270	0.1Wx5	Type C	4,000mAH	RGBCW	PC	10	34.5*24*42

LED Smart & Ambient

LED Smart Ambient Floor Lamp




- 30 mins time functions
- RGB+3000K Dimming
- Music Rhythm Mode

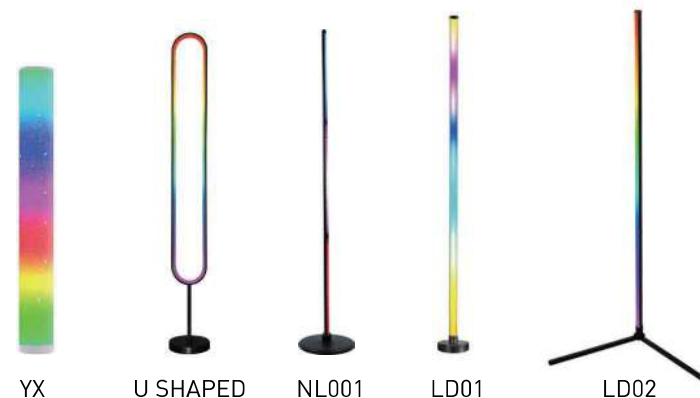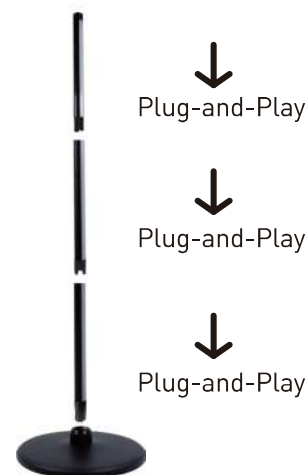


Model No. 产品规格	Dimension WxHxT(mm)	Material 产品材质	ColorTemp. 色温	Control Model 控制模式	Functions 功能	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSAFL-NL001-E10	Φ200*1200	PC+ALU	RGB+3000K	Remote Control	Music sync / timer / dimming dynamic modes / Static colors	4	44.5*21.5*26.5
XGYSAFL-SY-U SHAPED-E10	Φ110*1200	STEEL+ALU	RGB+3000K	Remote Control Bluetooth APP	4 music modes / Timer / Static colors dynamic modes / dimming	40	38.0*26.0*24.5
XGYSAFL-SY-YX-E10	Φ122*1030	PP+ABS	RGB+3000K	Remote Control Bluetooth APP	Music sync / timer / dimming dynamic modes	40	38.0*32.0*29.5
XGYSAFL-SY-LD01-E10	100*1220	PC+ABS	RGB+3000K	Remote Control Bluetooth APP	Music sync / timer / dimming dynamic modes	40	38.0*26.0*24.5
XGYSAFL-SY-LD02-E10	300*1220	ABS+ALU+IRON	RGB+3000K	Remote Control Bluetooth APP	Music sync / timer / dimming dynamic modes	40	38.0*32.0*29.5

LED Smart & Ambient

LED Smart Hexagon DIY Lamp

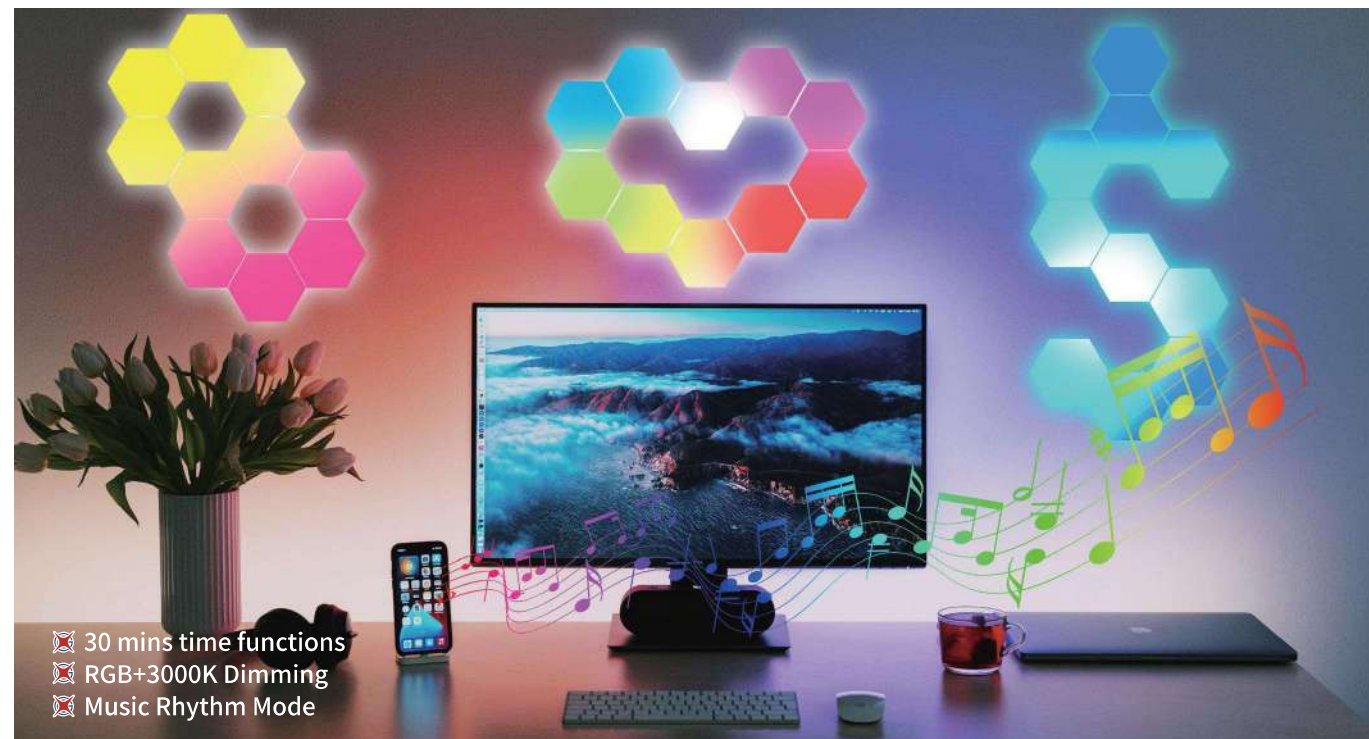

- 30 mins time functions
- RGB+3000K Dimming
- Music Rhythm Mode

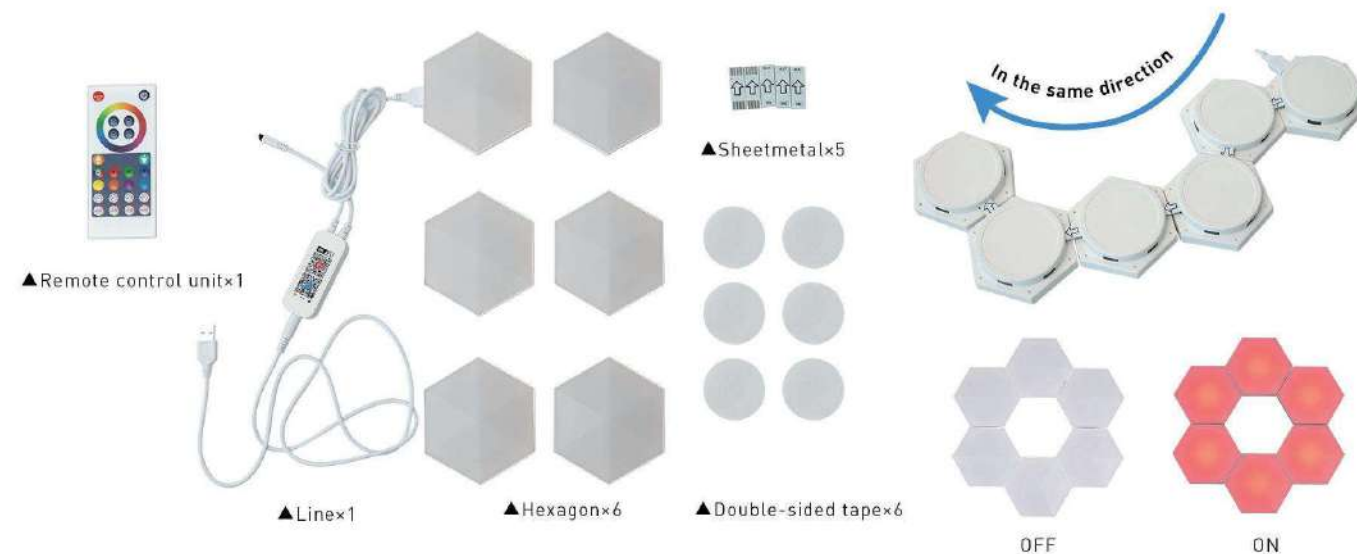

Model No. 产品规格	Dimension W*H*T(mm)	Rated Power 产品功率	Color Temp. 色温	Control Model 控制模式	Color 颜色	Power Supply 颜色	Material 产品材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSAFL-XPL004-E12	104*90*30	12W	RGBCW	Bluetooth WIFI APP Remote Control	White	USB Interface	ABS+PC	12	20.5*20.5*11.5

NEW LIGHTS EXPORTS TO ...

WORLD MAP



• NORTH AMERICA

- Canada
- United States
- Mexico

• LATIN AMERICA

- | | |
|-----------|-----------|
| Ecuador | Brazil |
| Colombia | Chile |
| Venezuela | Argentina |
| Peru | |

• EUROPE & MIDDLE EAST

- | | | | |
|----------------|---------|---------|--------------|
| United Kingdom | France | Romania | Iran |
| Norway | Germany | Ukraine | Saudi Arabia |
| Sweden | Poland | Israel | Pakistan |
| Portugal | Belarus | Syria | Kazakhstan |
| Spain | Greece | Iraq | |

• AFRICA

- Tunisia
- Algeria
- Egypt
- South Africa

• ASIA

- Russia
- Thailand
- South Korea
- Japan

• AUSTRALIA & SE ASIA

- Malaysia
- Indonesia
- Philippines
- Australia



PROFESSIONAL & TRUSTWORTHY PARTNERS