

LED SMD Bulbs

Standard



CB CE ErP  



No Flicker



Dimmable
Option



Ra80/90



15000
-25000h



S: 220-240V
110-130V
U: 85-265V



For Indoor



>0.5/0.9



B22



E26



E27



E12



E14



C37

C37T

A60

A70

A80

G125

G95

A65

A55

A50

G45

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-C37-E2/3/5/6/7	Φ37*98	2/3/5/6/7W	80-180lm/W	3000K-6500K	270°	100	40*20*23
XGY-SMD-C37T-E2/3/5/6/7	Φ37*130	2/3/5/6/7W	80-180lm/W	3000K-6500K	270°	100	40*20*29
XGY-SMD-G45-E2/3/5/6/7	Φ45*78	2/3/5/6/7W	80-180lm/W	3000K-6500K	270°	100	47*24*18.5
XGY-SMD-A50-E5/6/7	Φ50*96	5/6/7W	80-180lm/W	3000K-6500K	270°	100	52x27x24
XGY-SMD-A55-E6/7	Φ55*98	6/7W	80-180lm/W	3000K-6500K	270°	100	57x29x24
XGY-SMD-A60-E7/9/12/15	Φ60*110	7/9/12/15W	80-180lm/W	3000K-6500K	270°	100	63x32.5x24
XGY-SMD-A65-E15/18	Φ65*125	15/18W	80-180lm/W	3000K-6500K	270°	100	67x34.5x29.6
XGY-SMD-A70-E14/18	Φ70*135	14/18W	80-180lm/W	3000K-6500K	270°	100	77x37x32.5
XGY-SMD-A80-E20	Φ80*159	20W	80-180lm/W	3000K-6500K	270°	100	82x42x35.6
XGY-SMD-G95-E10/15/18	Φ95*135	10/15/18W	80-180lm/W	3000K-6500K	270°	40	49.5*40*30
XGY-SMD-G125-E15/20	Φ125*156	15/20W	80-180lm/W	3000K-6500K	270°	40	64.5*52*37

LED SMD Bulbs

T Series



CB CE ErP 



No Flicker



Dimmable
Option



Ra80/90



15000
~25000h



S: 220-240V
110-130V
U:85-265V



For Indoor



>0.5/>0.9



B22



E26



E27



E12



E14

02



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-T30-E6.5	Φ33*105	6.5W	80-180lm/W	3000K-6500K	200°	100	35.5*18.5*23.5
XGY-SMD-T37-E10	Φ37*107	10W	80-180lm/W	3000K-6500K	200°	100	39*20.5*22
XGY-SMD-T40-E10	Φ40*110	10W	80-180lm/W	3000K-6500K	200°	100	42*22*23
XGY-SMD-T50-E15	Φ51*150	15W	80-180lm/W	3000K-6500K	200°	100	53.5*27.5*32
XGY-SMD-T80-E20	Φ80*140	20W	80-180lm/W	3000K-6500K	200°	20	44*35*18
XGY-SMD-T100-E30	Φ100*185	30W	80-180lm/W	3000K-6500K	200°	20	54*43.1*22
XGY-SMD-T120-E40	Φ120*213	40W	80-180lm/W	3000K-6500K	200°	20	64*51*25
XGY-SMD-T140-E50	Φ140*252	50W	80-180lm/W	3000K-6500K	220°	18	45*44.5*53.5
XGY-SMD-T160-E60	Φ160*290	60W	80-180lm/W	3000K-6500K	220°	9	50.5*50.5*31.5

LED SMD Bulbs

LED Spot Lite (GU/MR Series)



CB CE ErP 



No Flicker



Dimmable
Option



Ra80/90



15000
-25000h



DC12V
S: 220-240V
110-130V



For Indoor



GU5.3



GU10

03



MR16-Diffuser



MR16-Lens



GU10-Diffuser



GU10-Lens

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-MR16 -E5/6/7	Φ50*58	5/6/7W	80-180lm/w	3000K-6500K	36°/ 110°	100	54*26.5*14.5
XGY-SMD-GU10 -E2/3/5/6/7/8	Φ50*58	2/3/5/6/7/8W	80-180lm/w	3000K-6500K	36°/ 110°	100	54*26.5*14.5

LED SMD Bulbs



LED Glass Spot Lite (GU Series)



CB CE ErP 



No Flicker



Dimmable
Option



Ra80



15000
~25000h



S: 220-240V
110-130V



For Indoor



>0.4



GU10

04



GU10GP



GU10G



GU10GC




GU1035GC

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Useful Lumen 有效光通量	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-GU10G-E1.9 (ERP Class A)	Φ50*55.5	1.9W	340lm	3000K-6500K	36°	100	27.5*27.5*25.8
XGY-SMD-GU10G-E4.5 (ERP Class A)	Φ50*55.5	4.5W	720lm	3000K-6500K	36°	100	27.5*27.5*25.8
XGY-SMD-GU10G-E4.5	Φ50*55.5	4.5W	400lm/520lm 620lm	3000K-6500K	36°	100	27.5*27.5*25.8
XGY-SMD-GU10G-E2.2 (ERP Class B / LC Dim Opt.)	Φ50*55.5	2.2W (LCDIM)	350lm	3000K-6500K	36°	100	27.5*27.5*25.8
XGY-SMD-GU10G(GC)-E4.5 (ERP Class F / LC Dim Opt.)	Φ50*54	4.5W (LCDIM)	400lm	3000K-6500K	36°	100	27.5*27.5*25
XGY-SMD-GU10G(GC)-E4.5 (ERP Class F / Dim To Warm)	Φ50*54	4.5W (DTW)	400lm/450lm 520lm	2200K-3000K (DTW)	36°	100	27.5*27.5*25
XGY-SMD-GU10G(GC)-E4.5 (ERP Class F / S3D&CCTM)	Φ50*54	4.5W [100%/50%/10%]	400lm	2700K @ 100% 2500K @ 50% 2200K @ 10%	36°	100	27.5*27.5*25
XGY-SMD-GU1035GC-E3 (ERP Class F / LC Dim Opt.)	Φ35*46	3W (LCDIM)	220lm	3000K-6500K	36°	100	20*20*21.8
XGY-SMD-GU1035GC-E3 (ERP Class F / S3DIMM)	Φ35*46	3W [100%/50%/10%]	220lm	3000K-6500K	36°	100	20*20*21.8

LED SMD Bulbs

R / PAR Series

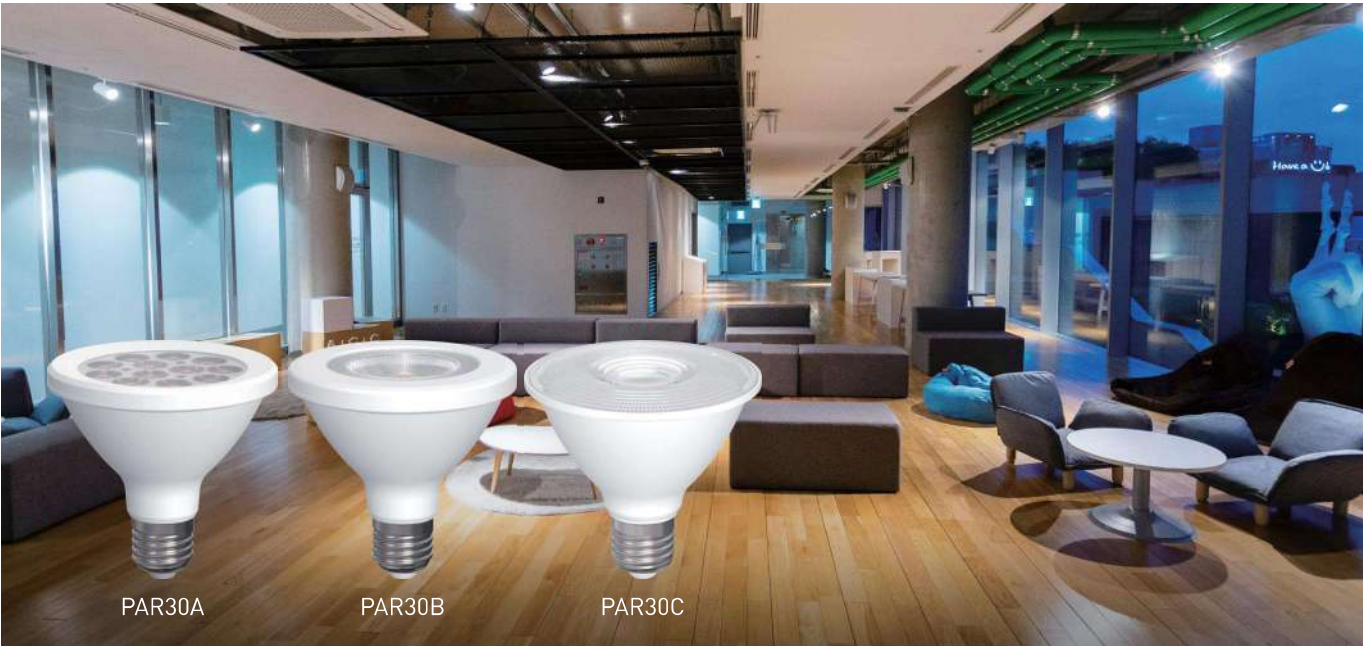

CB CE ErP  



No Flicker



Dimmable
Option



Ra80/90



15000
-25000h



S:220-240V
110-130V



For Indoor



E26



E27



E12



E14

05



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-R39-E3/4	Φ39*67	3/4W	80-180lm/W	3000K-6500K	120°	200	42.5*22*30.5
XGY-SMD-R50-E5/7	Φ50*87	5/7W	80-180lm/W	3000K-6500K	120°	100	52*27*20
XGY-SMD-R63-E7/9	Φ63*99	7/9W	80-180lm/W	3000K-6500K	120°	100	63*33.5*23
XGY-SMD-R80-E10/12	Φ80*114	10/12W	80-180lm/W	3000K-6500K	120°	40	42*34*30
XGY-SMD-R90-E12/15	Φ90*121	12/15W	80-180lm/W	3000K-6500K	120°	40	47*38*34
XGY-SMD-PAR20-E8	Φ63*84	8W	80-180lm/W	3000K-6500K	24°/ 38°	100	67.5*34.5*20
XGY-SMD-PAR30-E12	Φ95*94	12W	80-180lm/W	3000K-6500K	24°/ 38°	50	51.5*51*21.5
XGY-SMD-PAR38-E18	Φ121*130	18W	80-180lm/W	3000K-6500K	24°/ 38°	24	52.5*39.5*29

LED SMD Bulbs

AR / ED Series



CB CE ErP 



No Flicker



Dimmable
Option



Ra80/90



15000
-25000h



S: 220-240V



For Indoor



E40



E27



E26



G53



GU10



AR70F-GU10



AR111F-SMD-GU10



AR111F-GU10



AR111F-COB-GU10



AR111F-G53



AR111F-SMD-GU10



ED105



ED120



ED90

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-AR70-E7	Φ71*78	7W	80-180lm/W	3000K-6500K	12° / 24°	100	38*37.5*33.5
XGY-SMD-AR111-E12/15	Φ113*80 Φ111*66	12W/15W	80-180lm/W	3000K-6500K	38°	50	59*24.5*42.5 59*24.5*38.5
XGY-SMD-ED90-E30/40	Φ93*225 (235 @ E40 Base)	30/40W	80-180lm/W	3000K-6500K	300°	20	49*39*24.5 (25.5 @ E40 Base)
XGY-SMD-ED105-E50/55	Φ108*265 (275 @ E40 Base)	50/55W	80-180lm/W	3000K-6500K	300°	15	56.5*34.5*28.5 (29.5 @ E40 Base)
XGY-SMD-ED120-E60/70	Φ122*296 (306 @ E40 Base)	60/70W	80-180lm/W	3000K-6500K	300°	15	63.5*38.5*32 (33 @ E40 Base)

LED SMD Bulbs

Switch CCT Control



CB CE ErP SAA RoHS

No Flicker

Dimmable Option

Ra80/90

15000-25000h

S: 220-240V

For Indoor

GU5.3

GU10

E27

E26


07



Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSMD-MR16-HJ01-3CCT	Φ50*55	6W	80lm/W	3000K / 4000K / 6500K	36°/ 110°	100	52*26.5*13.2
XGYSMD-GU10-HJ01-3CCT	Φ50*56	5/6/7W	80lm/W	3000K / 4000K / 6500K	36°/ 110°	100	52*26.5*13.2
XGYSMD-A60-HJ01-3CCT	Φ60*108 Φ60*118	9W 12W	90lm/W	3000K / 4000K / 6500K	200°	100	62*31.5*23.5 62*31.5*25.5
XGYSMD-T37-HJ01-3CCT	Φ37*115	8W	90lm/W	3000K / 4000K / 6500K	200°	100	39*20*25.5
XGYSMD-T45-HJ01-3CCT	Φ45*139	12W	90lm/W	3000K / 4000K / 6500K	200°	100	46*23.5*30.1
XGYSMD-A60-HJ02-3CCT	Φ60*113	10W	90lm/W	3000K / 4000K / 6500K	120°	100	63*32.5*24.5
XGYSMD-C37-HJ02-3CCT	Φ35*106	6W	80lm/W	3000K / 4000K / 6500K	120°	100	39*20.5*22
XGYSMD-G45-HJ02-3CCT	Φ45*88	6W	80lm/W	3000K / 4000K / 6500K	120°	100	47*24*20

LED SMD Bulbs

WIFI & Bluetooth Control & Zigbee

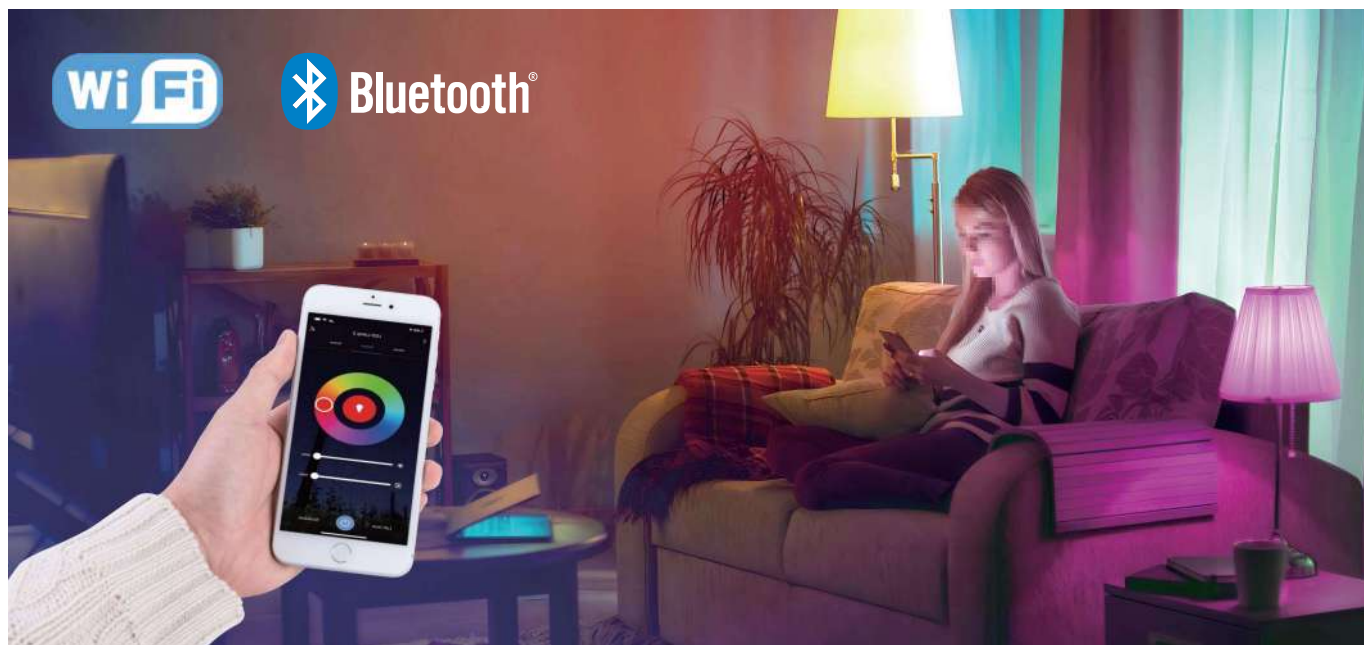

CB CE ErP 



No Flicker



Dimmable
Option



Ra80



15000
~25000h



S: 85-265V



For Indoor

Mobile APP:



GU10



E26



E27



E12



E14

APP: Tuya Smart



GU10

C37

A70

G120

G95

A60

G45

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-GU10- -RGBCW-E5/6	Φ50*54/59	5/6W	70lm/W	RGBCW	36°	100	54*26.5*14.5
XGY-SMD-C37- -RGBCW-E5	Φ37*106	5W	90lm/W	RGBCW	220°	100	39*20.5*22
XGY-SMD-G45- -RGBCW-E5	Φ45*90	5W	90lm/W	RGBCW	200°	100	47*24*20
XGY-SMD-A60- -RGBCW-E9/12	Φ60*108/118	9/12W	90lm/W	RGBCW	200°	100	63*32.5*23.5
XGY-SMD-A70- -RGBCW-E15	Φ70*131	15W	90lm/W	RGBCW	200°	20	37.5*37.5*30
XGY-SMD-G95- -RGBCW-E13	Φ95*140	13W	100lm/W	RGBCW	200°	20	51*51*30.5
XGY-SMD-G120- -RGBCW-E15	Φ120*158	15W	100lm/W	RGBCW	200°	20	63.5*63.5*30.5

LED SMD Bulbs

Microwave Sensor Series



CB CE ErP 



No Flicker



Ra80/90



15000
-25000h



S: 220-240V



For Indoor



E26



E27



E12



E14




C37



A60




G45

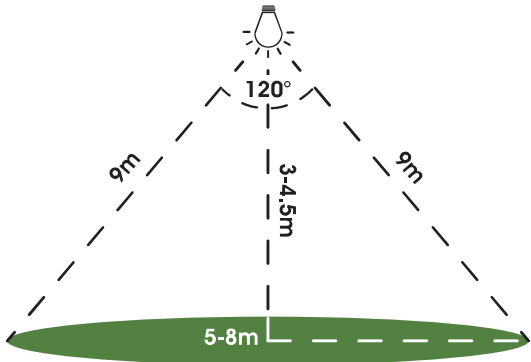

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-C37-MS-E5	Φ37*100	5W	90lm/W	3000K-6500K	270°	100	40*20*23
XGY-SMD-G45-MS-E5	Φ45*79	5W	90lm/W	3000K-6500K	270°	100	47*24*18.5
XGY-SMD-A60-MS-E5	Φ60*108	5W	90lm/W	3000K-6500K	270°	100	63*32.5*24
XGY-SMD-A60-MS-E9	Φ60*108	9W	90lm/W	3000K-6500K	270°	100	63*32.5*24
XGY-SMD-A60-MS-E11	Φ60*118	11W	90lm/W	3000K-6500K	270°	100	63*32.5*24

LED SMD Bulbs

Light Sensor Type

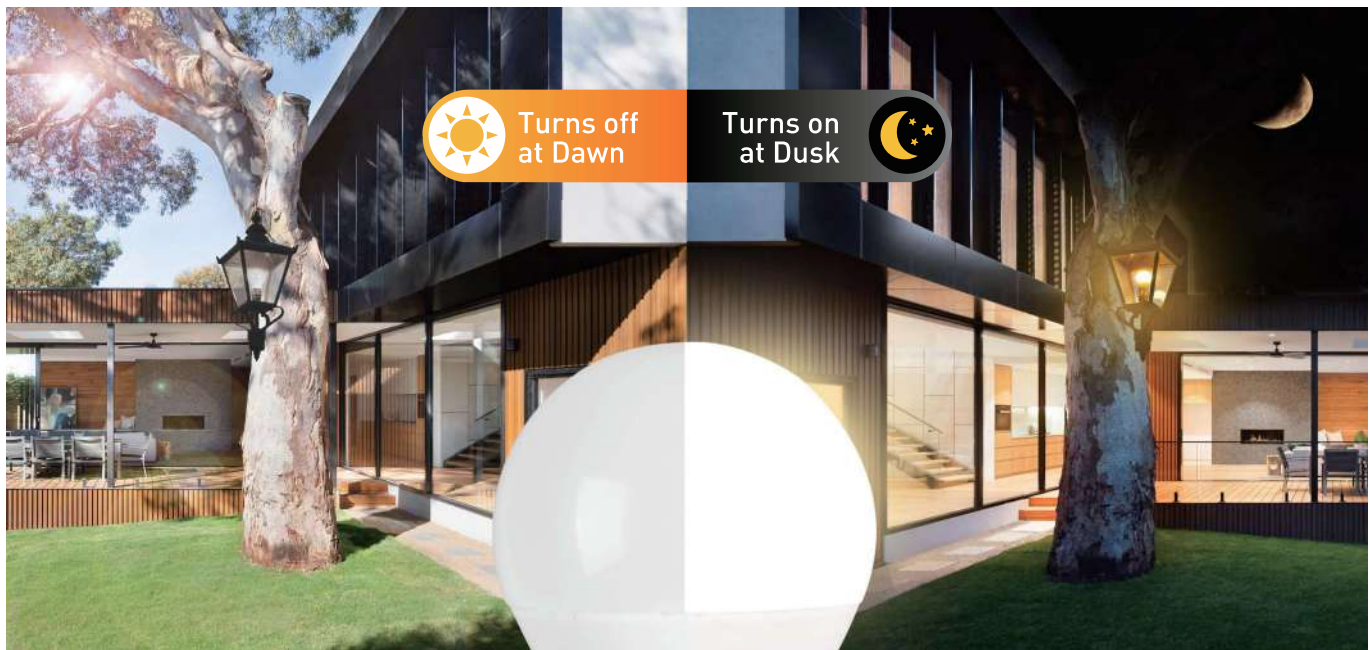

CB CE ErP 



No Flicker



Ra80/90



15000
-25000h



S: 220-240V



For Indoor



E26



E27

10

Features:

- ✗ Use High Quality Chips in ALU+PC Body, With High Diffusion PC Cover
- ✗ High Quality Driver with Minimized Flickering
- ✗ Light Sensor Only



<25 lux



>25 lux

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Total Lumen 光通量	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-A60 -LS-E7/9	Φ60*108	7/9W	600lm/820lm	3000K-6500K	200°	100	63.5*32.5*26

LED SMD Bulbs

Emergency Type



3 Hours
BATTERY CAPACITY

CB CE ErP 



No Flicker



Ra80



15000h



U:85-265V



For Indoor



E26



E27

11



A60-EMG



T105-EMG



A80-EMG2BR



A80-EMG2BR-RC-TC



A60-EMG-RC

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Battery Capacity 电池容量	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-SMD-A60-EMG-E5	Φ60*125	5W						32*32*52
XGY-SMD-A70-EMG-E7/9/12	Φ70*135	7/9/12W	90lm/W	3000K-6500K	1200mAh	200°	100	37*37*54
XGY-SMD-A80-EMG-E9/12/15	Φ80*145	9/12/15W						40*40*60
XGY-SMD-T70-EMG-E7	Φ70*130	7W					100	36.5*36.5*54
XGY-SMD-T80-EMG-E9	Φ80*145	9W					100	42*42*60
XGY-SMD-T95-EMG-E12	Φ95*165	12W	70-80lm/W	3000K-6500K	1500mAh	200°	100	49.5*49.5*70
XGY-SMD-T105-EMG-E15	Φ105*175	15W					50	54*54*37
XGY-SMD-A80-EMG2BR-E12/15	Φ80*160	12/15W	70-80lm/W	3000K-6500K	1200mAh*2	200°	100	42*42*66
XGY-SMD-A80-EMG2BR-RC-TC-E10	Φ80*160	10W	70-80lm/W	3000K/4000K/6500K	1200mAh*2	200°	100	42*42*66
XGY-SMD-A60-EMG-RC-E10	Φ60*125	10W	70-80lm/W	3000K/4000K/6500K	1200mAh	200°	100	32*32*52

LED SMD Bulbs

LED G4 Series



CB CE ErP 



No Flicker



Dimmable
Option



Ra>80



25000h



AC/DC12V



For Indoor





0.7

12

Features:

- High Quality Body Material with Improved Heat Dissipation
- High Quality Driver with Minimized Flickering, Optional AC/DC Input
- High Quality LED 2835/5050 LED Chips
- Different Power & Lumen Efficacy Available
- Lifetime of 25,000 hrs. With 2 Years Warranty

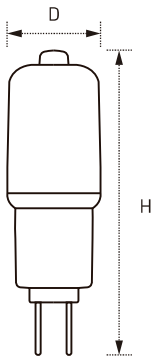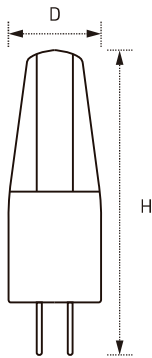

G4



XGY-G4-XH-001C-E1.2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.2W	3000K-6500K	100lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
10*36	360°	Silicon



XGY-G4-XH-002C-E1.8

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.8W	3000K-6500K	150lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
13*36	360°	Silicon



XGY-G4-XH-008C-E1.5

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.5W	3000K-6500K	150lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
11*38	320°	Silicon



XGY-G4-XH-009C-E2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
2W	3000K-6500K	220lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
13,5*41,5	320°	Silicon



XGY-G4-XH-0705C-E1.2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.2W	3000K-6500K	110lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
11*34	320°	Silicon



XGY-G4-XH-1505C-E1.5

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.5W	3000K-6500K	150lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
11*41.5	320°	Silicon



XGY-G4-XH-1508C-E2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
2W	3000K-6500K	220lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
13,5*41,5	320°	Silicon



XGY-G4-XH-801-E1.5

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.5W	3000K-6500K	180lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
10,5*37	360°	Ceramic



XGY-G4-ST-1860-25D-E3 XGY-G4-ST-1860-25D-E4

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
3W 4W	3000K-6500K	290lm 350lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
19*50	360°	PC



XGY-G4-XH-803-E1.2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.2W	3000K-6500K	150lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
10*30	320°	PC



XGY-G4-XH-007-E1.2

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.2W	3000K-6500K	100lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
12*32	320°	PC



XGY-G4-XH-008-E1.8

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
1.8W	3000K-6500K	150lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
16*44	320°	PC

LED SMD Bulbs

LED G9 Series



CB CE ErP 



No Flicker



Dimmable
Option



Ra > 80



25000h



S: 220-240V
100-265V



For Indoor



0.4/0.9



14

Features:

- ✗ High Quality Body Material with Improved Heat Dissipation
- ✗ High Quality Driver with Minimized Flickering, Optional AC/DC Input
- ✗ High Quality LED 2835/5050 LED Chips
- ✗ Different Power & Lumen Efficacy Available
- ✗ Lifetime of 25,000 hrs. With 2 Years Warranty



G9

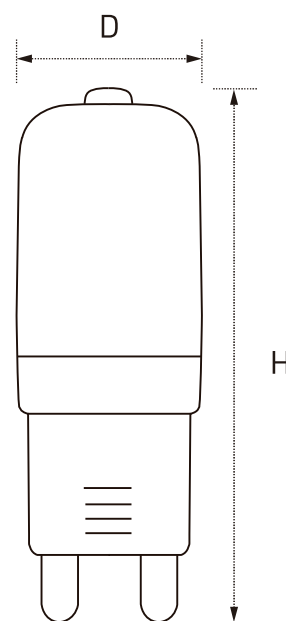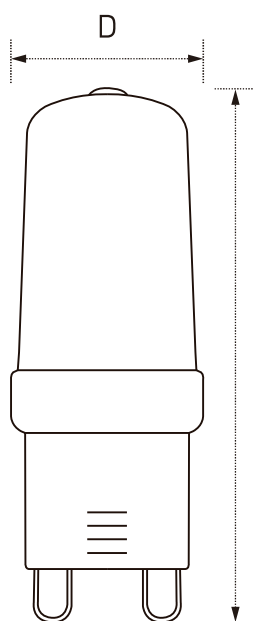



XGY-G9-XH-005-E3 XGY-G9-XH-006-E3.4

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
3W 3.4W	3000K-6500K	350lm 400lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
16.5*50	360°	Thermal Conductive Plastic



XGY-G9-XH-009-E4 XGY-G9-XH-010-E4.8 XGY-G9-XH-028-E4.8

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
4W 4.8W 4.8W	3000K-6500K	470lm 550lm 700lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
19*56	360°	Thermal Conductive Plastic



XGY-G9-XH-011-E4.8 XGY-G9-XH-P-011-E4.8

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
4.8W	3000K-6500K	630lm 700lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
19*56	360°	Thermal Conductive Plastic



XGY-G9-XH-012-E3.3

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
3.3W	3000K-6500K	370lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
19*59	320°	Thermal Conductive Plastic



XGY-G9-XH-013-E3.8

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
3.8W	3000K-6500K	450lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
19*59	320°	Thermal Conductive Plastic



XGY-G9-XH-002-E3

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
3W	3000K-6500K	350lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
17*50	360°	Ceramic



XGY-G9-XH-P-031-E4.8

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
4.8W	3000K-6500K	650lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
18.5*55.5	360°	Ceramic



XGY-G9-XH-801-E2.5

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
2.5W	3000K-6500K	280lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
15*42.5	360°	Ceramic



XGY-G9-XH-022-E5.5

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
5.5W	3000K-6500K	700lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
19*65	360°	Ceramic



XGY-G9-XH-027-E7

Rated Power 额定功率	Color Temp. 色温	Total Lumen 光通量
7W	3000K-6500K	880lm
Dimension LxWxH(mm)	Beam Angle 发光角度	Body Material 灯体材质
21*72	360°	Ceramic



XGY-G9-XH-018-E7

Rated Power	Color Temp.	Total Lumen
额定功率	色温	光通量
7W	3000K-6500K	1000lm
Dimension	Beam Angle	Body Material
LxWxH(mm)	发光角度	灯体材质
18.5*75	360°	Ceramic



XGY-G9-XH-004-E2

Rated Power	Color Temp.	Total Lumen
额定功率	色温	光通量
2W	3000K-6500K	200lm
Dimension	Beam Angle	Body Material
LxWxH(mm)	发光角度	灯体材质
16*48	320°	PC



XGY-G9-XH-DIM-001-E3

Rated Power	Color Temp.	Total Lumen
额定功率	色温	光通量
3W	3000K-6500K	300lm
Dimension	Beam Angle	Body Material
LxWxH(mm)	发光角度	灯体材质
17*50	360°	Ceramic



XGY-G9-XH-DIM-018-E6

Rated Power	Color Temp.	Total Lumen
额定功率	色温	光通量
6W	3000K-6500K	650lm
Dimension	Beam Angle	Body Material
LxWxH(mm)	发光角度	灯体材质
18.5*75	360°	Ceramic



XGY-G9-XH-001-E2.2

Rated Power	Color Temp.	Total Lumen
额定功率	色温	光通量
2.2W	3000K-6500K	250lm
Dimension	Beam Angle	Body Material
LxWxH(mm)	发光角度	灯体材质
14.5*60	320°	Glass



XGY-G9-XH-002-E4

Rated Power	Color Temp.	Total Lumen
额定功率	色温	光通量
4W	3000K-6500K	500lm
Dimension	Beam Angle	Body Material
LxWxH(mm)	发光角度	灯体材质
14.5*65	320°	Glass



XGY-E14-P-XH-001-E3.5

Rated Power	Color Temp.	Total Lumen
额定功率	色温	光通量
3.5W	3000K-6500K	350lm
Dimension	Beam Angle	Body Material
LxWxH(mm)	发光角度	灯体材质
17.5*52.5	360°	Ceramic



XGY-E14-P-XH-003-E4

Rated Power	Color Temp.	Total Lumen
额定功率	色温	光通量
4W	3000K-6500K	470lm
Dimension	Beam Angle	Body Material
LxWxH(mm)	发光角度	灯体材质
16*64.5	360°	Ceramic



XGY-E14-P-XH-005-E5.5

Rated Power	Color Temp.	Total Lumen
额定功率	色温	光通量
5.5W	3000K-6500K	720lm
Dimension	Beam Angle	Body Material
LxWxH(mm)	发光角度	灯体材质
18.5*73.5	360°	Ceramic



XGY-E14-P-XH-004-E7

Rated Power	Color Temp.	Total Lumen
额定功率	色温	光通量
7W	3000K-6500K	1055lm
Dimension	Beam Angle	Body Material
LxWxH(mm)	发光角度	灯体材质
18.5*83.5	360°	Ceramic

LED SMD Bulbs

LED R7S Series



CB CE ErP 



No Flicker



Dimmable
Option



Ra80/90
/97



15000
-25000h



S: 220-240V



For Indoor



R7S-78



R7S-118



R7S-135

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficiency 光效	Color Temp. 色温	Beam Angle 发光角度	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-R7S-78-E5	Φ25*78	4.5W	80-150lm/W	3000K-6500K	270°	300	43.5*28*19.5
XGY-R7S-118-E8	Φ25*118	8W	80-150lm/W	3000K-6500K	270°	200	30.5*29*28
XGY-R7S-135-E11	Φ25*135	11W	80-150lm/W	3000K-6500K	270°	200	30.5*29*31.5